



REALTEK

ALC233-VB
(PN: ALC233-VB2-CG)

**4-CHANNEL HIGH DEFINITION AUDIO CODEC WITH
EMBEDDED CLASS-D SPEAKER AMPLIFIER**

DATASHEET

Rev. 0.3



Realtek Semiconductor Corp.
No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
Tel.: +886-3-578-0211. Fax: +886-3-577-6047
www.realtek.com

COPYRIGHT

© 2013 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

DISCLAIMER

Realtek provides this document ‘as is’, without warranty of any kind. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

TRADEMARKS

Realtek is a trademark, of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

USING THIS DOCUMENT

This document is intended for the hardware and software engineer’s general information on the Realtek ALC233-VB Audio Codec IC.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide. In that event, please contact your Realtek representative for additional information that may help in the development process.

REVISION HISTORY

Revision	Release Date	Summary
0.1	2013/08/28	First release.
0.2	2013/10/18	Modify ordering information and increase feature
0.3	2016/11/15	Increase a new ordering part number for tape and reel package

Table of Contents

1. GENERAL DESCRIPTION	1
2. FEATURES	2
2.1. HARDWARE FEATURES	2
2.2. SOFTWARE FEATURES	3
3. SYSTEM APPLICATIONS	4
4. BLOCK DIAGRAM	5
4.1. ANALOG INPUT/OUTPUT UNIT	6
4.2. JACK DETECTION RESISTOR MATRIX	6
5. PIN ASSIGNMENTS	7
5.1. PACKAGE AND VERSION IDENTIFICATION	8
5.1.1. Engineering Samples: B1	8
5.1.2. Production Version: B2	8
6. PIN DESCRIPTIONS	9
6.1. DIGITAL I/O PINS	9
6.2. ANALOG I/O PINS	10
6.3. FILTER/REFERENCE/NOT CONNECTED PINS	11
6.4. POWER & GROUND PINS	11
7. HIGH DEFINITION AUDIO LINK PROTOCOL	12
7.1. LINK SIGNALS	12
7.1.1. Signal Definitions	13
7.1.2. Signaling Topology	14
7.2. FRAME COMPOSITION	15
7.2.1. Outbound Frame-Single SDO	15
7.2.2. Outbound Frame-Multiple SDOs	16
7.2.3. Inbound Frame-Single SDI	17
7.2.4. Inbound Frame-Multiple SDIs	18
7.2.5. Variable Sample Rates	18
7.3. RESET AND INITIALIZATION	21
7.3.1. Link Reset	21
7.3.2. Codec Reset	22
7.3.3. Codec Initialization Sequence	23
7.4. VERB AND RESPONSE FORMAT	23
7.4.1. Command Verb Format	23
7.4.2. Response Format	26
7.4.3. Double Function Reset	26
7.5. POWER MANAGEMENT	27
8. SUPPORTED VERBS AND PARAMETERS	29
8.1. VERB-GET PARAMETERS (VERB ID=F00H)	29
8.1.1. Parameter-Vendor ID (Verb ID=F00h, Parameter ID=00h)	29
8.1.2. Parameter-Revision ID (Verb ID=F00h, Parameter ID=02h)	29
8.1.3. Parameter-Subordinate Node Count (Verb ID=F00h, Parameter ID=04h)	30
8.1.4. Parameter-Function Group Type (Verb ID=F00h, Parameter ID=05h)	30

8.1.5.	Parameter-Audio Function Capabilities (Verb ID=F00h, Parameter ID=08h).....	30
8.1.6.	Parameter-Audio Widget Capabilities (Verb ID=F00h, Parameter ID=09h).....	31
8.1.7.	Parameter-Supported PCM Size, Rates (Verb ID=F00h, Parameter ID=0Ah).....	32
8.1.8.	Parameter-Supported Stream Formats (Verb ID=F00h, Parameter ID=0Bh).....	33
8.1.9.	Parameter-Pin Capabilities (Verb ID=F00h, Parameter ID=0Ch).....	33
8.1.10.	Parameter-Amplifier Capabilities (Verb ID=F00h, Input Amplifier Parameter ID=0Dh).....	34
8.1.11.	Parameter-Amplifier Capabilities (Verb ID=F00h, Output Amplifier Parameter ID=12h).....	34
8.1.12.	Parameter-Connect List Length (Verb ID=F00h, Parameter ID=0Eh).....	35
8.1.13.	Parameter-Supported Power States (Verb ID=F00h, Parameter ID=0Fh).....	35
8.1.14.	Parameter-Processing Capabilities (Verb ID=F00h, Parameter ID=10h).....	36
8.1.15.	Parameter-GPIO Capabilities (Verb ID=F00h, Parameter ID=11h).....	36
8.1.16.	Parameter-Volume Knob Capabilities (Verb ID=F00h, Parameter ID=13h).....	36
8.2.	VERB-GET CONNECTION SELECT CONTROL (VERB ID=F01H).....	37
8.3.	VERB-SET CONNECTION SELECT (VERB ID=701H).....	37
8.4.	VERB-GET CONNECTION LIST ENTRY (VERB ID=F02H).....	38
8.5.	VERB-GET PROCESSING STATE (VERB ID=F03H).....	42
8.6.	VERB-SET PROCESSING STATE (VERB ID=703H).....	42
8.7.	VERB-GET COEFFICIENT INDEX (VERB ID=DH).....	42
8.8.	VERB-SET COEFFICIENT INDEX (VERB ID=5H).....	43
8.9.	VERB-GET PROCESSING COEFFICIENT (VERB ID=CH).....	43
8.10.	VERB-SET PROCESSING COEFFICIENT (VERB ID=4H).....	43
8.11.	VERB-GET AMPLIFIER GAIN (VERB ID=BH).....	44
8.12.	VERB-SET AMPLIFIER GAIN (VERB ID=3H).....	46
8.13.	VERB-GET CONVERTER FORMAT (VERB ID=AH).....	47
8.14.	VERB-SET CONVERTER FORMAT (VERB ID=2H).....	48
8.15.	VERB-GET POWER STATE (VERB ID=F05H).....	48
8.16.	VERB-SET POWER STATE (VERB ID=705H).....	50
8.17.	VERB-GET CONVERTER STREAM, CHANNEL (VERB ID=F06H).....	50
8.18.	VERB-SET CONVERTER STREAM, CHANNEL (VERB ID=706H).....	51
8.19.	VERB-GET PIN WIDGET CONTROL (VERB ID=F07H).....	51
8.20.	VERB-SET PIN WIDGET CONTROL (VERB ID=707H).....	52
8.21.	VERB-GET UNSOLICITED RESPONSE CONTROL (VERB ID=F08H).....	53
8.22.	VERB-SET UNSOLICITED RESPONSE CONTROL (VERB ID=708H).....	53
8.23.	VERB-GET PIN SENSE (VERB ID=F09H).....	54
8.24.	VERB-EXECUTE PIN SENSE (VERB ID=709H).....	54
8.25.	VERB-GET CONFIGURATION DEFAULT (VERB ID=F1CH/F1DH/F1EH/F1FH).....	54
8.26.	VERB-SET CONFIGURATION DEFAULT BYTES 0, 1, 2, 3 (VERB ID=71CH/71DH/71EH/71FH).....	55
8.27.	VERB-GET BEEP GENERATOR (VERB ID=F0AH).....	56
8.28.	VERB-SET BEEP GENERATOR (VERB ID=70AH).....	56
8.29.	VERB-GET GPIO DATA (VERB ID= F15H).....	57
8.30.	VERB-SET GPIO DATA (VERB ID= 715H).....	57
8.31.	VERB-GET GPIO ENABLE MASK (VERB ID=F16H).....	58
8.32.	VERB-SET GPIO ENABLE MASK (VERB ID=716H).....	58
8.33.	VERB-GET GPIO DIRECTION (VERB ID=F17H).....	59
8.34.	VERB-SET GPIO DIRECTION (VERB ID=717H).....	59
8.35.	VERB-GET GPIO UNSOLICITED RESPONSE ENABLE MASK (VERB ID=F19H).....	60
8.36.	VERB-SET GPIO UNSOLICITED RESPONSE ENABLE MASK (VERB ID=719H).....	60
8.37.	VERB-GET DIGITAL CONVERTER CONTROL 1 & CONTROL 2 & CONTROL 3 & CONTROL 4 (VERB ID= F0DH, F0EH, F3EH, F3FH).....	61
8.38.	VERB-SET DIGITAL CONVERTER CONTROL 1 & CONTROL 2 & CONTROL 3 & CONTROL 4 (VERB ID=70DH, 70EH, 73EH, 73FH)-.....	62
8.39.	VERB-GET SUBSYSTEM ID [31:0] (VERB ID=F20H/F21H/D22H/F23H).....	63
8.40.	VERB-SET SUBSYSTEM ID [31:0] (VERB ID=723H/722H/ 721H/720H FOR [31:24]/[23:16]/[15:8]/[7:0]).....	63
8.41.	VERB-GET/SET EAPD CONTROL (VERB ID=F0CH FOR GET, 70CH FOR SET).....	65

8.42.	VERB-FUNCTION RESET (VERB ID=7FFh)	66
9.	ELECTRICAL CHARACTERISTICS	67
9.1.	DC CHARACTERISTICS	67
9.1.1.	<i>Absolute Maximum Ratings</i>	67
9.1.2.	<i>Threshold Voltage</i>	68
9.1.3.	<i>SPDIF Output Characteristics</i>	68
9.1.4.	<i>Digital Filter Characteristics</i>	69
9.2.	AC CHARACTERISTICS	69
9.2.1.	<i>Link Reset and Initialization Timing</i>	69
9.2.2.	<i>Link Timing Parameters at the Codec</i>	70
9.2.3.	<i>SPDIF Output Timing</i>	71
9.3.	ANALOG PERFORMANCE	72
9.4.	CLASS-D POWER AMPLIFIER PERFORMANCE	73
10.	APPLICATION CIRCUITS	73
11.	MECHANICAL DIMENSIONS	74
11.1.	MECHANICAL DIMENSIONS NOTES	74
12.	ORDERING INFORMATION	75

List of Tables

TABLE 1.	DIGITAL I/O PINS.....	9
TABLE 2.	ANALOG I/O PINS	10
TABLE 3.	FILTER/REFERENCE/NOT CONNECTED PINS	11
TABLE 4.	POWER & GROUND PINS	11
TABLE 5.	LINK RESET#	13
TABLE 6.	HDA SIGNAL DEFINITIONS	13
TABLE 7.	DEFINED SAMPLE RATE AND TRANSMISSION RATE.....	19
TABLE 8.	48kHz VARIABLE RATE OF DELIVERY TIMING	19
TABLE 9.	44.1kHz VARIABLE RATE OF DELIVERY TIMING	20
TABLE 10.	40-BIT COMMANDS IN 4-BIT VERB FORMAT	23
TABLE 11.	40-BIT COMMANDS IN 12-BIT VERB FORMAT	23
TABLE 12.	SUPPORTED COMMANDS	24
TABLE 13.	SUPPORTED PARAMETERS.....	25
TABLE 14.	SOLICITED RESPONSE FORMAT	26
TABLE 15.	UNSOLICITED RESPONSE FORMAT	26
TABLE 16.	SYSTEM POWER STATE DEFINITIONS	28
TABLE 17.	POWER CONTROLS IN NID 01H.....	28
TABLE 18.	POWERED DOWN CONDITIONS.....	28
TABLE 19.	VERB-GET PARAMETERS (VERB ID=F00H)	29
TABLE 20.	PARAMETER-VENDOR ID (VERB ID=F00H, PARAMETER ID=00H).....	29
TABLE 21.	PARAMETER-REVISION ID (VERB ID=F00H, PARAMETER ID=02H)	29
TABLE 22.	PARAMETER-SUBORDINATE NODE COUNT (VERB ID=F00H, PARAMETER ID=04H)	30
TABLE 23.	PARAMETER-FUNCTION GROUP TYPE (VERB ID=F00H, PARAMETER ID=05H).....	30
TABLE 24.	PARAMETER-AUDIO FUNCTION CAPABILITIES (VERB ID=F00H, PARAMETER ID=08H).....	30
TABLE 25.	PARAMETER-AUDIO WIDGET CAPABILITIES (VERB ID=F00H, PARAMETER ID=09H)	31
TABLE 26.	PARAMETER-SUPPORTED PCM SIZE, RATES (VERB ID=F00H, PARAMETER ID=0AH)	32
TABLE 27.	PARAMETER-SUPPORTED STREAM FORMATS (VERB ID=F00H, PARAMETER ID=0BH).....	33
TABLE 28.	PARAMETER-PIN CAPABILITIES (VERB ID=F00H, PARAMETER ID=0CH).....	33
TABLE 29.	PARAMETER-AMPLIFIER CAPABILITIES (VERB ID=F00H, INPUT AMPLIFIER PARAMETER ID=0DH)	34
TABLE 30.	PARAMETER-AMPLIFIER CAPABILITIES (VERB ID=F00H, OUTPUT AMPLIFIER PARAMETER ID=12H)	34
TABLE 31.	PARAMETER-CONNECT LIST LENGTH (VERB ID=F00H, PARAMETER ID=0EH).....	35
TABLE 32.	PARAMETER-SUPPORTED POWER STATES (VERB ID=F00H, PARAMETER ID=0FH)	35
TABLE 33.	PARAMETER-PROCESSING CAPABILITIES (VERB ID=F00H, PARAMETER ID=10H)	36
TABLE 34.	PARAMETER-GPIO CAPABILITIES (VERB ID=F00H, PARAMETER ID=11H).....	36
TABLE 35.	PARAMETER-VOLUME KNOB CAPABILITIES (VERB ID=F00H, PARAMETER ID=13H)	36
TABLE 36.	VERB-GET CONNECTION SELECT CONTROL (VERB ID=F01H)	37
TABLE 37.	VERB-SET CONNECTION SELECT (VERB ID=701H)	37
TABLE 38.	VERB-GET CONNECTION LIST ENTRY (VERB ID=F02H).....	38
TABLE 39.	VERB-GET PROCESSING STATE (VERB ID=F03H).....	42
TABLE 40.	VERB-SET PROCESSING STATE (VERB ID=703H)	42
TABLE 41.	VERB-GET COEFFICIENT INDEX (VERB ID=DH)	42
TABLE 42.	VERB-SET COEFFICIENT INDEX (VERB ID=5H).....	43
TABLE 43.	VERB-GET PROCESSING COEFFICIENT (VERB ID=CH).....	43
TABLE 44.	VERB-SET PROCESSING COEFFICIENT (VERB ID=4H)	43
TABLE 45.	VERB-GET AMPLIFIER GAIN (VERB ID=BH)	44
TABLE 46.	VERB-SET AMPLIFIER GAIN (VERB ID=3H).....	46
TABLE 47.	VERB-GET CONVERTER FORMAT (VERB ID=AH).....	47
TABLE 48.	GET CONVERTER FORMAT SUPPORT	47
TABLE 49.	VERB-SET CONVERTER FORMAT (VERB ID=2H)	48
TABLE 50.	VERB-GET POWER STATE (VERB ID=F05H).....	48
TABLE 51.	VERB-SET POWER STATE (VERB ID=705H).....	50

TABLE 52.	VERB-GET CONVERTER STREAM, CHANNEL (VERB ID=F06H)	50
TABLE 53.	VERB-SET CONVERTER STREAM, CHANNEL (VERB ID=706H)	51
TABLE 54.	VERB-GET PIN WIDGET CONTROL (VERB ID=F07H).....	51
TABLE 55.	VERB-SET PIN WIDGET CONTROL (VERB ID=707H)	52
TABLE 56.	VERB-GET UNSOLICITED RESPONSE CONTROL (VERB ID=F08H)	53
TABLE 57.	VERB-SET UNSOLICITED RESPONSE CONTROL (VERB ID=708H)	53
TABLE 58.	VERB-GET PIN SENSE (VERB ID=F09H)	54
TABLE 59.	VERB-EXECUTE PIN SENSE (VERB ID=709H)	54
TABLE 60.	VERB-GET CONFIGURATION DEFAULT (VERB ID=F1Ch/F1Dh/F1Eh/F1Fh)	55
TABLE 61.	VERB-SET CONFIGURATION DEFAULT BYTES 0, 1, 2, 3 (VERB ID=71Ch/71Dh/71Eh/71Fh).....	55
TABLE 62.	VERB-GET BEEP GENERATOR (VERB ID= F0Ah).....	56
TABLE 63.	VERB-SET BEEP GENERATOR (VERB ID= 70Ah)	56
TABLE 64.	VERB-GET GPIO DATA (VERB ID= F15H)	57
TABLE 65.	VERB-SET GPIO DATA (VERB ID= 715H)	57
TABLE 66.	VERB-GET GPIO ENABLE MASK (VERB ID= F16H).....	58
TABLE 67.	VERB-SET GPIO ENABLE MASK (VERB ID=716H).....	58
TABLE 68.	VERB-GET GPIO DIRECTION (VERB ID=F17H).....	59
TABLE 69.	VERB-SET GPIO DIRECTION (VERB ID=717H).....	59
TABLE 70.	VERB-GET GPIO UNSOLICITED RESPONSE ENABLE MASK (VERB ID=F19H)	60
TABLE 71.	VERB-SET GPIO UNSOLICITED RESPONSE ENABLE MASK (VERB ID=719H)	60
TABLE 72.	VERB-GET DIGITAL CONVERTER CONTROL 1 & CONTROL 2 (VERB ID= F0Dh, F0Eh)	61
TABLE 73.	VERB-SET DIGITAL CONVERTER CONTROL 1 & CONTROL 2 (VERB ID=70Dh, 70Eh)	62
TABLE 74.	VERB-GET SUBSYSTEM ID [31:0] (VERB ID=F20H/F21H/F22H/F23H)	63
TABLE 75.	VERB-SET SUBSYSTEM ID [31:0] (VERB ID=723H/722H/721H/720H FOR [31:24]/[23:16]/[15:8]/[7:0]).....	63
TABLE 76.	VERB-GET EAPD CONTROL (VERB ID=F0Ch)	65
TABLE 77.	VERB-SET EAPD CONTROL (VERB ID=70Ch)	65
TABLE 78.	VERB-FUNCTION RESET (VERB ID=7FFh)	66
TABLE 79.	ABSOLUTE MAXIMUM RATINGS	67
TABLE 80.	THRESHOLD VOLTAGE	68
TABLE 81.	SPDIF OUTPUT CHARACTERISTICS.....	68
TABLE 82.	DIGITAL FILTER CHARACTERISTICS	69
TABLE 83.	LINK RESET AND INITIALIZATION TIMING.....	69
TABLE 84.	LINK TIMING PARAMETERS AT THE CODEC	70
TABLE 85.	SPDIF OUTPUT TIMING	71
TABLE 86.	ANALOG PERFORMANCE.....	72
TABLE 87.	CLASS-D POWER AMPLIFIER PERFORMANCE.....	73
TABLE 88.	ORDERING INFORMATION	75

List of Figures

FIGURE 1.	BLOCK DIAGRAM	5
FIGURE 2.	ANALOG INPUT/OUTPUT UNIT.....	6
FIGURE 3.	JACK DETECTION1 CONNECTION EXAMPLE.....	6
FIGURE 4.	PIN ASSIGNMENTS	7
FIGURE 5.	HDA LINK PROTOCOL.....	12
FIGURE 6.	BIT TIMING.....	13
FIGURE 7.	SIGNALING TOPOLOGY	14
FIGURE 8.	SDO OUTBOUND FRAME.....	15
FIGURE 9.	SDO STREAM TAG IS INDICATED IN SYNC.....	15
FIGURE 10.	STRIPED STREAM ON MULTIPLE SDOs	16
FIGURE 11.	SDI INBOUND STREAM	17
FIGURE 12.	SDI STREAM TAG AND DATA	17
FIGURE 13.	CODEC TRANSMITS DATA OVER MULTIPLE SDIs.....	18
FIGURE 14.	LINK RESET TIMING.....	22
FIGURE 15.	CODEC INITIALIZATION SEQUENCE.....	23
FIGURE 16.	RESUME FROM EXTERNAL EVENT (WAKE-UP EVENT).....	27
FIGURE 17.	LINK RESET AND INITIALIZATION TIMING	69
FIGURE 18.	LINK SIGNAL TIMING.....	70
FIGURE 19.	OUTPUT TIMING.....	71

1. General Description

The ALC233-VB is a High Definition Audio Codec that integrates a 4-channel DAC, 4-channel ADC, and a stereo Class-D Speaker Amplifier with 2 watts per channel output power. Compared to the ALC269 series, the ALC233-VB provides extra low power consumption, not only for the speaker amplifier but also when driving the headphone amplifier.

The 4-channel DAC supports two independent stereo or 2.1-channel sound outputs; the 4-channel ADC integrates two stereo and independent analog sound inputs (multiple streaming). Incorporating Realtek converter technology achieves a 97dB dynamic range playback quality and a 90dB dynamic range recording quality. It meets WLP (Windows Logo Program) requirements for Windows systems.

ALC233-VB supports stereo digital microphone input with Realtek proprietary Acoustic Echo Cancellation (AEC), Beam Forming (BF), and Noise Suppression (NS) technology, significantly improving voice quality for PC VoIP applications.

As well as basic audio functions, the ALC233-VB supports one SPDIF output converter to connect a PC to consumer electronic products such as digital decoders and speakers.

There are three integrated amplifiers: A linear headphone amplifier at port-E, another headphone amplifier at port-I remove the need for external DC blocking capacitors, eliminating pop noise caused by these capacitors, and the third is an integrated stereo Class-D amplifier to directly drive speakers. The Class-D amplifier is designed to drive speakers with as low as 4 Ω impedance. Its maximum output power is 2W per channel at 5V power supply. The advantage of an integrated Class-D amplifier in the ALC233-VB is high efficiency with lower power consumption.

The ALC233-VB supports Universal Audio Jack, where it not only operates with OMTP and Standard Headsets, such as an iPhone Headset, but also as a Line-in/Microphone. The ALC233-VB detects OMTP and Standard headsets with no extra MOSFET or analog switch required. The ALC233-VB provides a 'Headset Push-Button Control' function; certain types of push button behavior on the headset line can be detected, and control corresponding to individual push button behavior can be customized by the Realtek audio driver according to customer's requests.

2. Features

2.1. *Hardware Features*

- Meets Microsoft® WLP (Windows Logo Program) and Lync™ audio requirements for Windows systems
- 97dB Signal-to-Noise Ratio (A-weighting) for DAC output
- 90dB Signal-to-Noise Ratio (A-weighting) for ADC input
- 4-channel DAC supports 16/20/24-bit PCM format for independent two stereo channel or 2.1 audio playback
- 4-channel ADC supports 16/20/24-bit PCM format for independent two stereo channel audio inputs
- All DACs support 44.1k/48k/96k/192kHz sample rate
- All ADCs support 44.1k/48k/96k/192kHz sample rate
- SPDIF-OUT supports 16/20/24-bit format and 44.1/48/88.2/96/192kHz rate
- Supports MONO line level output
- Analog port-E (LINE2) supports input and output re-tasking
- Port-C (LINE1) and port-F (MIC2) are dedicated inputs with boost gain
- Supports external PCBEEP input and features built-in digital BEEP generator
- Software selectable 2.5V/3.2V/4.0V VREFOUT as bias voltage for analog microphone input
- Programmable +10/+20/+30dB boost gain for analog microphone input
- Supports stereo digital microphone input, and programmable boost gain and volume control
- Built-in headphone amplifiers for port-E (LINE2) and port-I (HP-OUT)
- Headphone amplifier for port-I does not require DC blocking capacitors
- Supports three jack detection pins each designed to detect up to 2 jacks, and SPDIF-OUT jack detection
- Supports combo jack with stereo headphone output and mono microphone input on a 4-pole jack
- Combo jack detection without extra MOSFET needed

- Supports Headset Push-Button Control for combo jack
- 4 GPIOs for customized applications (pin-shared with digital microphone interface and SPDIF-OUT)
- Supports Anti-pop mode when analog power AVDD1 is on and DVDD/AVDD2 are off
- Supports PCBEEP pass-through to Class-D output (Port D)
- Supports Line-In pass-through to speaker out (Sleep & Music mode)
- Volume synchronization for PCBEEP in D0/D3 mode change
- PCBEEP input signal level detection
- Enhanced power management features for normal operation and standby mode
- Stereo Bridge-Tied Load Class-D amplifier at port-D has 2Watt (rms)/4Ω per channel output
- DC detector, short circuit and thermal overload protection for Class-D amplifier
- Class D amplifier has seven band hardware equalizers and high pass filter to compensate for frequency response and protect the speaker
- AGC (Auto Gain Control) function for Class-D amplifier removes distortion when outputting high volume sound
- Class-D amplifier output with slew rate control to improve EMI performance
- Intel low power DCN (HDA015-B) compliant, supports power status control, jack detection, and wake-up event in D3 mode
- 48-pin MQFN ‘Green’ package (6x6 mm dimension)

2.2. Software Features

- Compatible with Windows Logo Program 3.1x requirements
- EAX™ 1.0 & 2.0 compatible
- Direct Sound 3D™ compatible
- I3DL2 compatible
- Emulation of 26 sound environments to enhance gaming experience
- Multi-band software equalizer and tools

- Voice Cancellation and Key Shifting in Karaoke mode
- Dynamic range control (expander, compressor, and limiter) with adjustable parameters
- Intuitive Configuration Panel (Realtek Audio Manager) to enhance the user experience
- Realtek proprietary Microphone Acoustic Echo Cancellation (AEC), Noise Suppression (NS), and 2nd generation Beam Forming (BF) technology for voice application
- Smart multiple streaming operation
- HDMI audio driver for AMD platform
- Dolby® PCEE program™ (optional software feature)
- DTS® CONNECT™, DTS® Surround Sensation UltraPC™ (optional software feature)
- SRS® TruSurround HD, SRS® Premium Sound™ (optional software feature)
- SonicFocus® Programs (optional software feature)
- Fortemedia® SAM™ technology for voice processing (Beam Forming and Acoustic Echo Cancellation) (optional software feature)
- Creative® Host Audio program (optional software feature)

3. System Applications

- Notebook PCs
- Ultrabook and Tablet with High Definition Audio Controller

4. Block Diagram

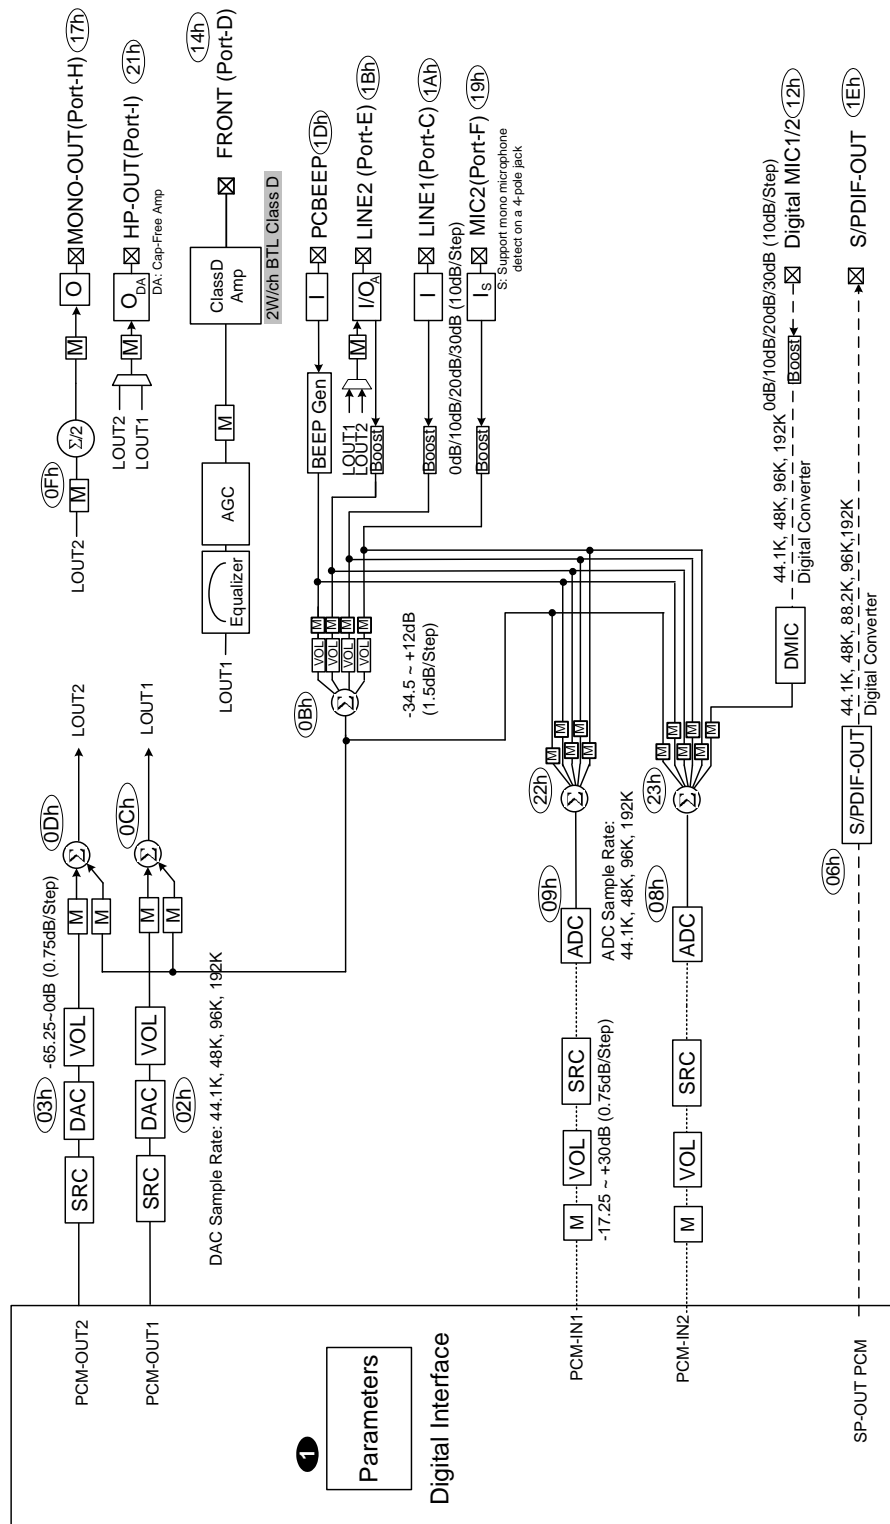


Figure 1. Block Diagram

4.1. Analog Input/Output Unit

Pin widgets NID=1Bh is re-tasking IO supporting input units and amplifier units.

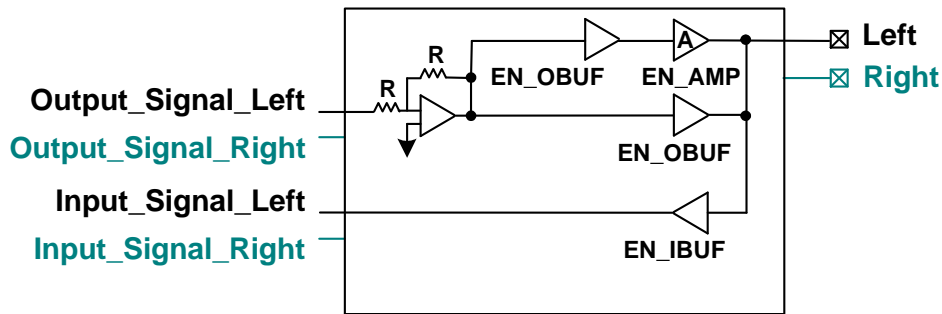


Figure 2. Analog Input/Output Unit

4.2. Jack Detection Resistor Matrix

JD1	
HP-JD (200K)	LINE1-JD (100K)
JD2	
MIC2-JD (200K)	LINE2-JD (100K)
JD3	
SPDIF-OUT-JD (200K)	SPK-OUT-JD (100K)

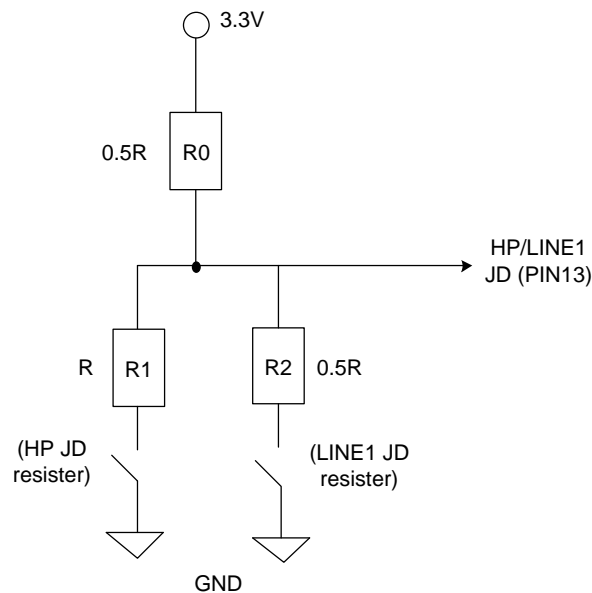


Figure 3. Jack Detection1 Connection Example

5. Pin Assignments


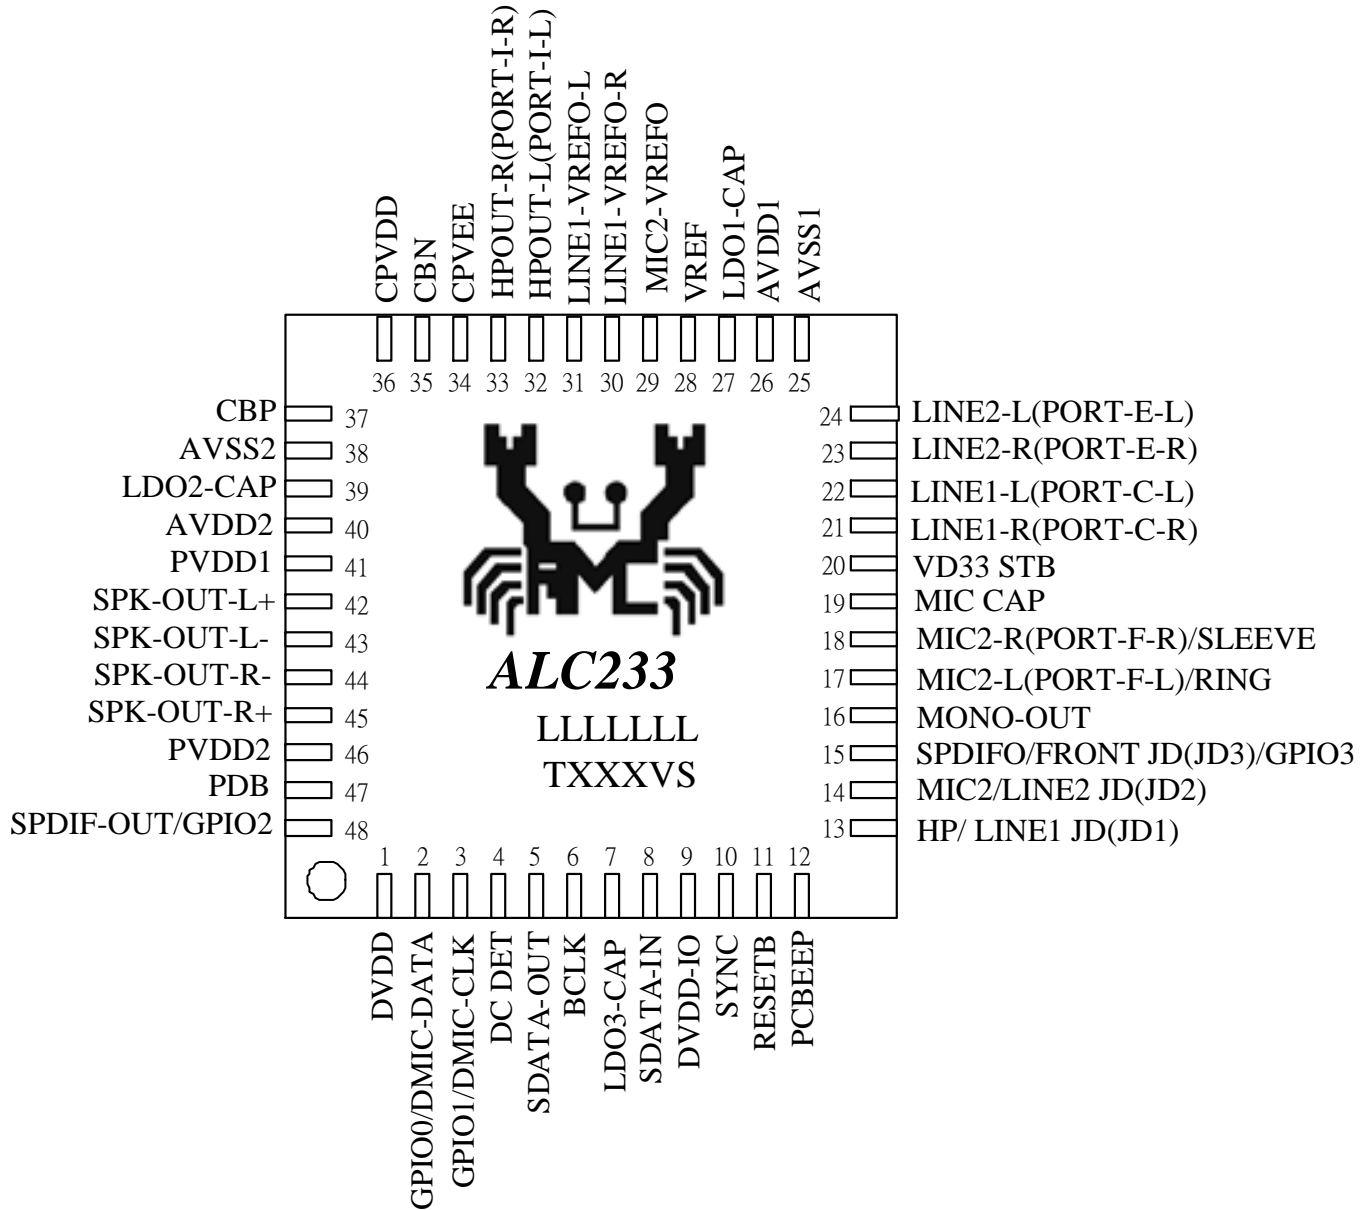


Figure 4. Pin Assignments


5.1. Package and Version Identification

Green package is indicated by a 'G' in the location marked 'T'. The silicon version and step numbers are shown in the location marked 'V' and 'S'.

5.1.1. Engineering Samples: B1

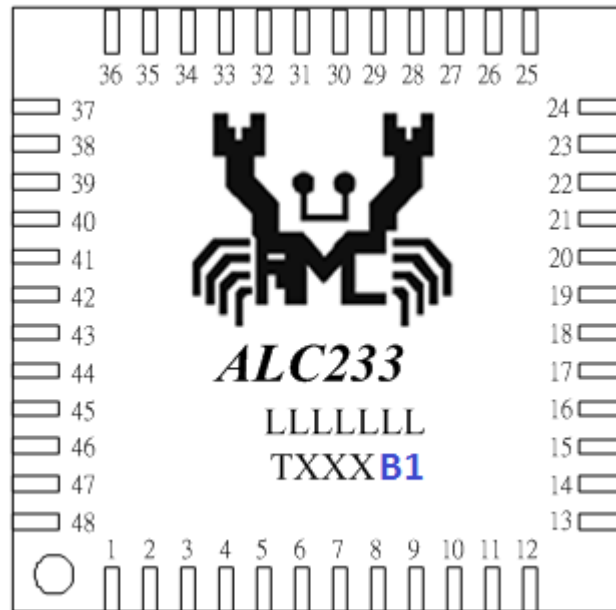

5.1.2. Production Version: B2

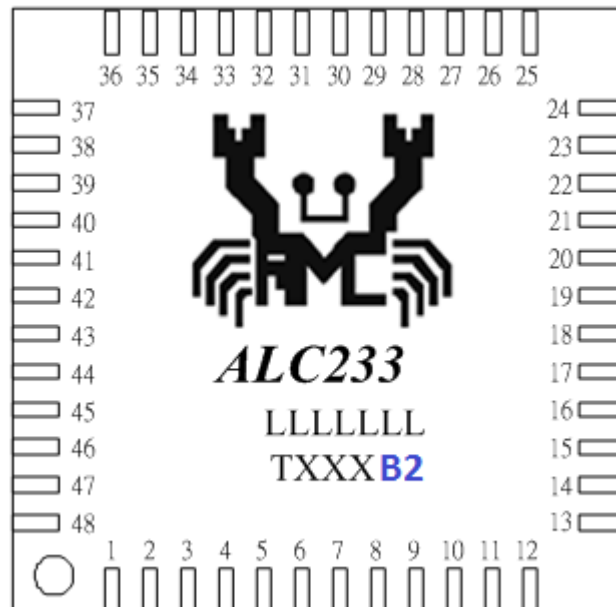

6. Pin Descriptions

6.1. Digital I/O Pins

Table 1. Digital I/O Pins

Name	Type	Pin	Description	Characteristic Definition
RESETB	I	11	H/W Reset Control	Schmitt trigger input, $V_{IL}=0.4*DVDD-IO$, $V_{IH}=0.6*DVDD-IO$
SYNC	I	10	Sample Sync (48kHz)	Schmitt trigger input, $V_{IL}=0.4*DVDD-IO$, $V_{IH}=0.6*DVDD-IO$
BCLK	I	6	24MHz Bit Clock Input	Schmitt trigger input, $V_{IL}=0.4*DVDD-IO$, $V_{IH}=0.6*DVDD-IO$
SDATA-OUT	I	5	Serial TDM Data Input	Schmitt trigger input, $V_{IL}=0.4*DVDD-IO$, $V_{IH}=0.6*DVDD-IO$
DC DET	O	4	DC Detector Output	Open Drain
SDATA-IN	IO	8	Serial TDM Data Output	Schmitt trigger input, $V_{IL}=0.4*DVDD-IO$, $V_{IH}=0.6*DVDD-IO$ Output, $V_{OH}=0.9*DVDD-IO$, $V_{OL}=0.1*DVDD-IO$
SPDIF-OUT/ GPIO2 ¹	IO	48	SPDIF output, /General Purpose Input/Output 2	GPIO2: $V_t = 1/2*DVDD$, internal pull low to ground by 47k ohm. Output, $V_{OH} = DVDD$, $V_{IL} = DVSS$ SPDIF output: 12mA@75Ω driving capability.
GPIO0/ DMIC-DATA	IO	2	General Purpose Input/Output 0 Data input from digital MIC1&2	GPIO0: $V_t = 1/2*DVDD$, internal pull high to DVDD by 47k ohm. Output, $V_{OH}=DVDD$, $V_{OL}=DVSS$
GPIO1/ DMIC-CLK	IO	3	General Purpose Input/Output 1 Clock output for digital MIC	GPIO1: $V_t = 1/2*DVDD$, internal pull high to DVDD by 47k ohm. Output, $V_{OH} = DVDD$, $V_{IL} = DVSS$ DMIC-CLK: Default 2.048MHz clock output
PDB	I	47	Low to Power Down Class-D amplifier Output (Port-D)	Schmitt trigger input, $V_{IL}=0.4*DVDD$, $V_{IH}=0.6*DVDD$, internal pull high to DVDD by 47k ohm (Internally pulled-high by a 47K resistor)
JD1	I	13	Jack Detect for HP and Line1 port	Internal pull high/low/float programmable PIN. 3 thresholds to detect 4 states 2.2V/1.65V/1.32V (Option for 1 pin detects 1 port)
JD2	I	14	Jack Detect for MIC2 and Line2 port	Internal pull high/low/float programmable PIN 3 thresholds to detect 4 states 2.2V/1.65V/1.32V (Option for 1 pin detects 1 port)

Name	Type	Pin	Description	Characteristic Definition
JD3/GPIO3	I	15	Jack Detect for SPDIF-OUT and SPK-OUT port	Internal pull high/low/float programmable PIN 3 thresholds to detect 4 states 2.2V/1.65V/1.32V (Option for 1 pin detects 1 port)
				Total: 13 Pins

Note: Combo jack detection pin is shared with SPDIF-OUT. Contact Realtek for the latest optimized Combo Jack design circuit.

6.2. Analog I/O Pins

Table 2. Analog I/O Pins

Name	Type	Pin	Description	Characteristic Definition
PCBEEP	I	12	External PCBEEP Input	Analog input, 1.3Vrms of full-scale input
LINE2-L	IO	24	2 nd Line Input Left Channel	Analog input/output, default is input (Port-E)
LINE2-R	IO	23	2 nd Line Input Right Channel	Analog input/output, default is input (Port-E)
MIC2-L	I	17	2 nd Stereo Microphone Input Left Channel	Analog input (Port-F)
MIC2-R	I	18	2 nd Stereo Microphone Input Right Channel	Analog input (Port-F)
MONO-OUT	O	16	MONO Output	Analog mono output
MIC CAP	I	19	Command mode voltage for MIC2 for 4 pole jack configuration	10μF capacitor to analog ground
LINE1-L	I	22	1 st Line Input Left Channel	Analog input (Port-C)
LINE1-R	I	21	1 st Line Input Right Channel	Analog input (Port-C)
SPK-OUT-L+	O	42	SPK Amplifier Positive Left Channel	Sigma Delta Modulation output (Port-D)
SPK-OUT-L-	O	43	SPK Amplifier Negative Left Channel	Sigma Delta Modulation output (Port-D)
SPK-OUT-R-	O	44	SPK Amplifier Negative Right Channel	Sigma Delta Modulation output (Port-D)
SPK-OUT-R+	O	45	SPK Amplifier Positive Right Channel	Sigma Delta Modulation output (Port-D)
HPOUT-L	O	32	Headphone Out Left Channel	Analog output (Port-I)
HPOUT-R	O	33	Headphone Out Right Channel	Analog output (Port-I)
				Total: 15 Pins

6.3. Filter/Reference/Not Connected Pins

Table 3. Filter/Reference/Not Connected Pins

Name	Type	Pin	Description	Characteristic Definition
VREF	-	28	2.25V Reference Voltage	4.7μF capacitor to analog ground
LDO1-CAP	-	27	Reference Voltage for integrated regulator for AVDD1	10μF capacitor to analog ground
MIC2-VREFO	O	29	Bias Voltage for MIC2 Jack	2.25V/3.2V/4.0V reference voltage
LINE1-VREFO-R	O	30	Secondary Bias Voltage for LINE1 jack	2.25V/3.2V/4.0V reference voltage
LINE1-VREFO-L	O	31	Bias Voltage for LINE1 Jack	2.25V/3.2V/4.0V reference voltage
CPVEE	-	34	Reference Voltage Output	2.2μF capacitor to digital ground
CBN	-	35	Reference Capacitor	2.2μF capacitor to CBP
CBP	-	37	Reference Capacitor	2.2μF capacitor to CBN
LDO2-CAP	-	39	Reference voltage for integrated regulator for Analog core power	10μF capacitor to analog ground
LDO3-CAP	-	7	Reference voltage for integrated regulator for Digital core power	10μF capacitor to digital ground
				Total: 10Pins

6.4. Power & Ground Pins

Table 4. Power & Ground Pins

Name	Type	Pin	Description	Characteristic Definition
VD33 STB	P	20	Analog power VDD (3.3V)	Power for combo jack depop circuit at system shutdown mode
AVDD1	P	26	Analog VDD (5V)	Analog power for mixers, & IO ports
AVSS1	G	25	Analog GND	Analog ground for mixers, & IO ports
CPVDD	P	36	Capless Amplifier VDD (3.3V)	Power supply for cap-saving HP AMP & its charge pump
DVDD	P	1	Digital VDD (3.3V)	Digital power for digital I/O circuit
DVDD-IO	P	9	Digital VDD (3.3V or 1.5V)	Digital power for HDA link
AVDD2	P	40	Analog VDD (1.5V)	Analog power for DACs, ADCs
AVSS2	G	38	Analog GND	Analog ground for DACs, ADCs
PVDD1	P	41	Power Stage VDD (5.0V)	Power supply for full-bridge left channel
PVDD2	P	46	Power Stage VDD (5.0V)	Power supply for full-bridge right channel
Thermal Pad	G	-	Power Stage Ground	Ground for full-bridge left/right channel
				Total: 10 Pins

7. High Definition Audio Link Protocol

7.1. Link Signals

The High Definition Audio (HDA) Link is the digital serial interface that connects the HDA codecs to the HDA Controller. The HDA link protocol is controller synchronous, based on a 24.0MHz BIT-CLK sent by the HDA controller. The input and output streams, including command and PCM data, are isochronous with a 48kHz frame rate. Figure 5 shows the basic concept of the HDA link protocol.

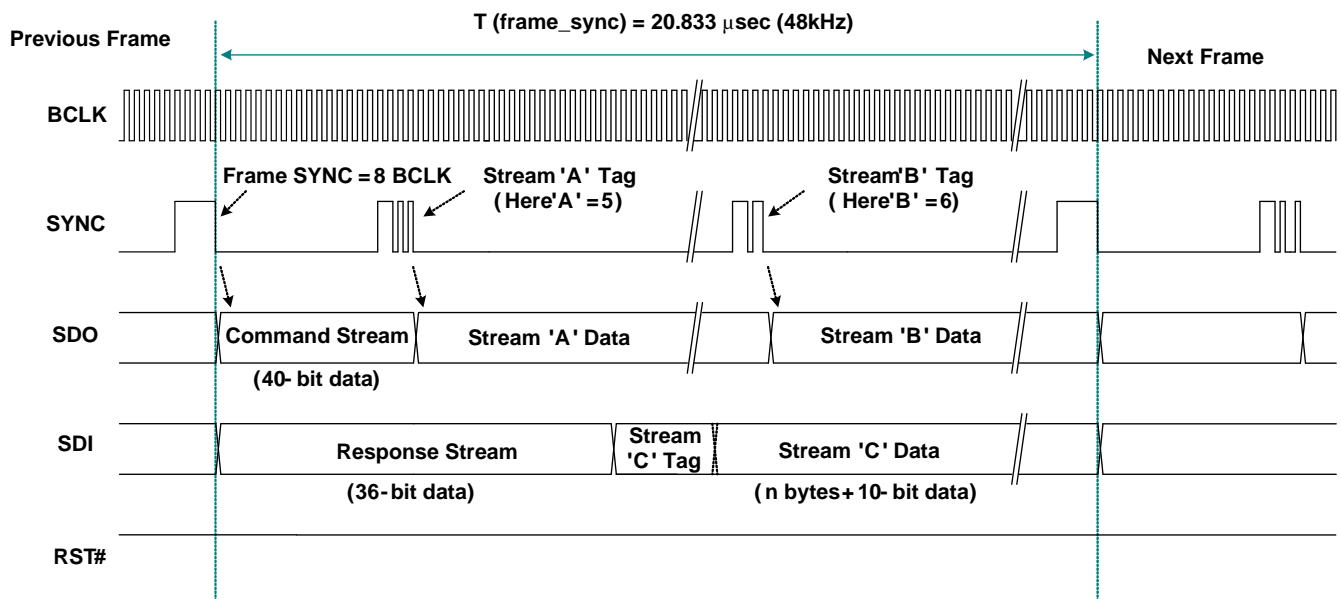


Figure 5. HDA Link Protocol

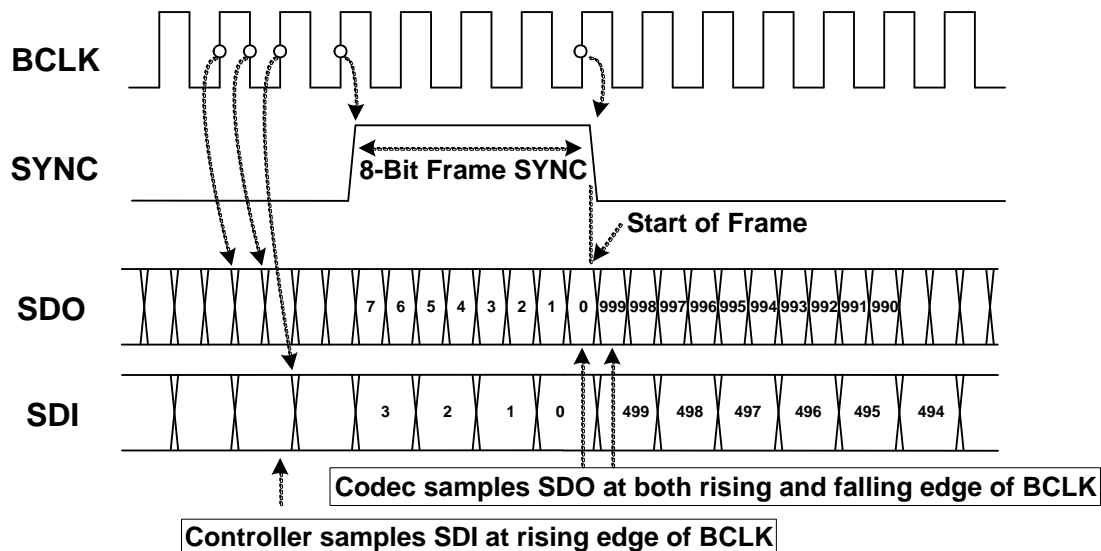
7.1.1. Signal Definitions

Table 5. Link RESET#

Item	Description
BCLK	24.0MHz bit clock sourced from the HDA controller and connecting to all codecs.
SYNC	A 48kHz signal used to synchronize input and output streams on the link. It is sourced from the HDA controller and connects to all codecs.
SDO	Serial Data Output signal driven by the HDA controller to all codecs. Commands and data streams are carried on SDO. The data rate is double-pumped; the controller drives data onto the SDO, the codec samples data present on SDO with respect to each edge of BCLK. The HDA controller must support at least one SDO. To extend outbound bandwidth, multiple SDOs may be supported.
SDI	Serial Data Input signal driven by the codec. This is point-to-point serial data from the codec to the HDA controller. The controller must support at least one SDI. Up to a maximum of 15 SDI's can be supported. SDI is driven by the codec at each rising edge of BCLK, and sampled by the controller at each rising edge of BCLK. SDI can be driven by the controller to initialize the codec's ID.
RESET#	Active low reset signal. Asserted to reset the codec to default power-on state. RESET# is sourced from the HDA controller and connects to all codecs.

Table 6. HDA Signal Definitions

Signal Name	Source	Type for Controller	Description
BCLK	Controller	Output	Global 24.0MHz bit clock.
SYNC	Controller	Output	Global 48kHz Frame Sync and outbound tag signal.
SDO	Controller	Output	Serial data output from controller.
SDI	Codec/Controller	Input/Output	Serial data input from codec. Weakly pulled down by the controller.
RESET#	Controller	Output	Global active low reset signal.


Figure 6. Bit Timing

7.1.2. Signaling Topology

The HDA controller supports two SDOs for the outbound stream, up to 15 SDIs for the inbound stream. RESET#, BCLK, SYNC, SDO0, and SDO1 are driven by the controller to codecs. Each codec drives its own point-to-point SDI signal(s) to the controller.

Figure 7 shows the possible connections between the HDA controller and codecs:

- Codec 0 is a basic connection. There is one single SDO and one single SDI for normal transmission
- Codec 1 has two SDOs for doubled outbound rate, and a single SDI for normal inbound rate
- Codec 3 supports a single SDO for normal outbound rate, and two SDIs for doubled inbound rate
- Codec N has two SDOs and multiple SDIs

The multiple SDOs and multiple SDIs are used to expand the transmission rate between controller and codecs. Section 7.2 Frame Composition, page 15, describes the detailed outbound and inbound stream compositions for single and multiple SDOs/SDIs.

The connections shown in Figure 7 can be implemented concurrently in an HDA system. The ALC233-VB is designed to receive a single SDO stream.

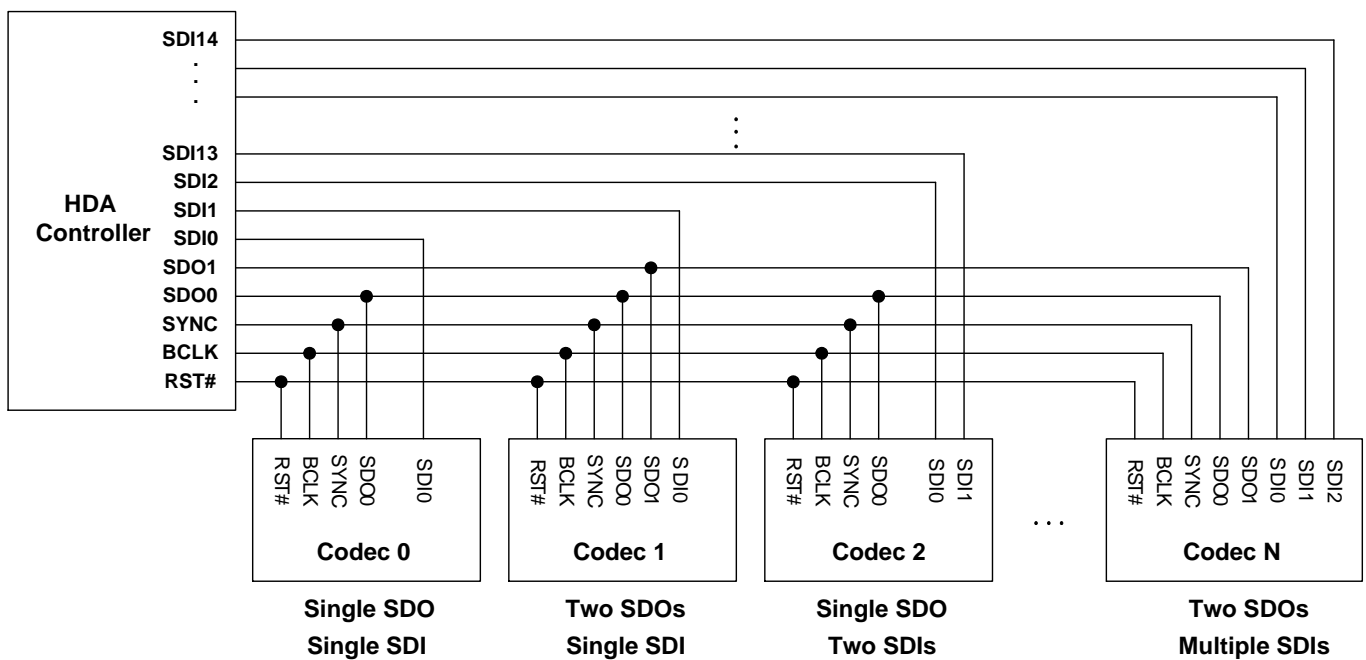


Figure 7. Signaling Topology

7.2. Frame Composition

7.2.1. Outbound Frame-Single SDO

An outbound frame is composed of one 32-bit command stream and multiple data streams. There are one or multiple sample blocks in a data stream. Only one sample block exists in a stream if the HDA controller delivers a 48kHz rate of samples to the codec. Multiple sample blocks in a stream means the sample rate is a multiple of 48kHz. This means there should be 2 blocks in the same stream to carry 96kHz samples (Figure 8).

For outbound frames, the stream tag is not in SDO, but in the SYNC signal. A new data stream is started at the end of the stream tag. The stream tag includes a 4-bit preamble and 4-bit stream ID (Figure 9).

To keep the cadence of converters bound to the same stream, samples for these converters must be placed in the same block.

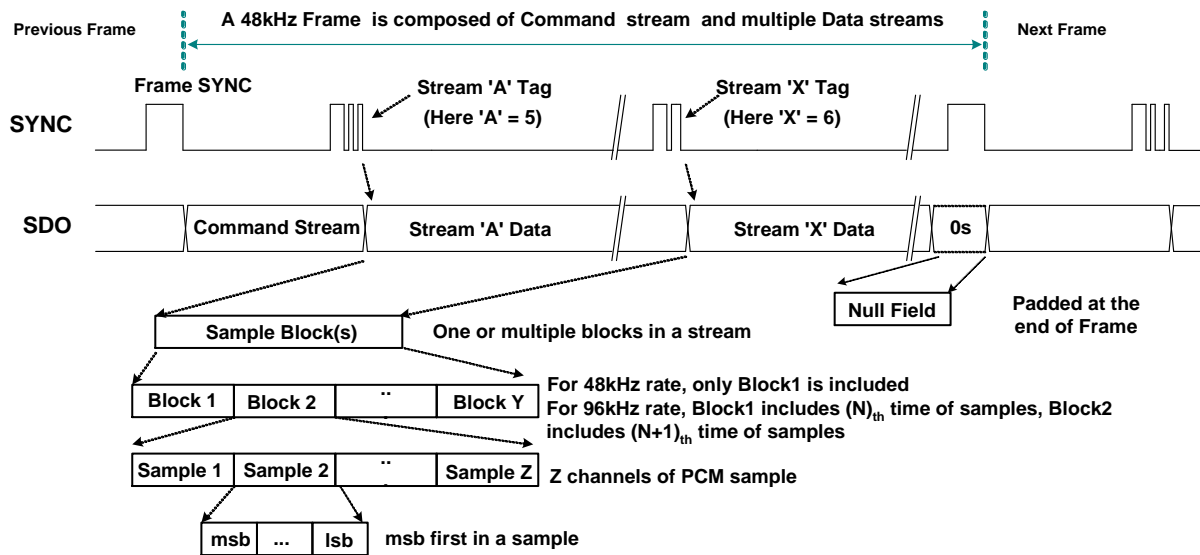


Figure 8. SDO Outbound Frame

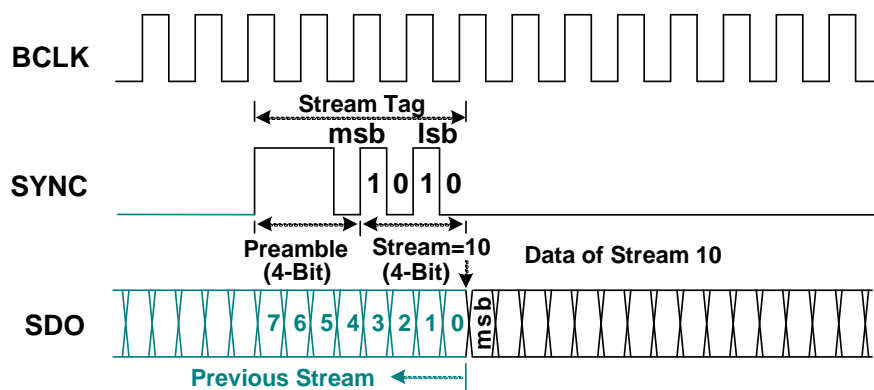


Figure 9. SDO Stream Tag is Indicated in SYNC

7.2.2. Outbound Frame-Multiple SDOs

The HDA controller allows two SDO signals to be used to stripe outbound data, completing transmission in less time to get more bandwidth. If software determines that the target codec supports multiple SDO capability, it enables the ‘Stripe Control’ bit in the controller’s Output Stream Control Register to initiate a specific stream (Stream ‘A’ in Figure 10) to be transmitted on multiple SDOs. In this case, the MSB of stream data is always carried on SDO0, the second bit on SDO1 and so forth.

SDO1 is for transmitting a striped stream. The codec does not support multiple SDOs connected to SDO0.

To guarantee all codecs can determine their corresponding stream, the command stream is not striped. It is always transmitted on SDO0, and copied on SDO1.

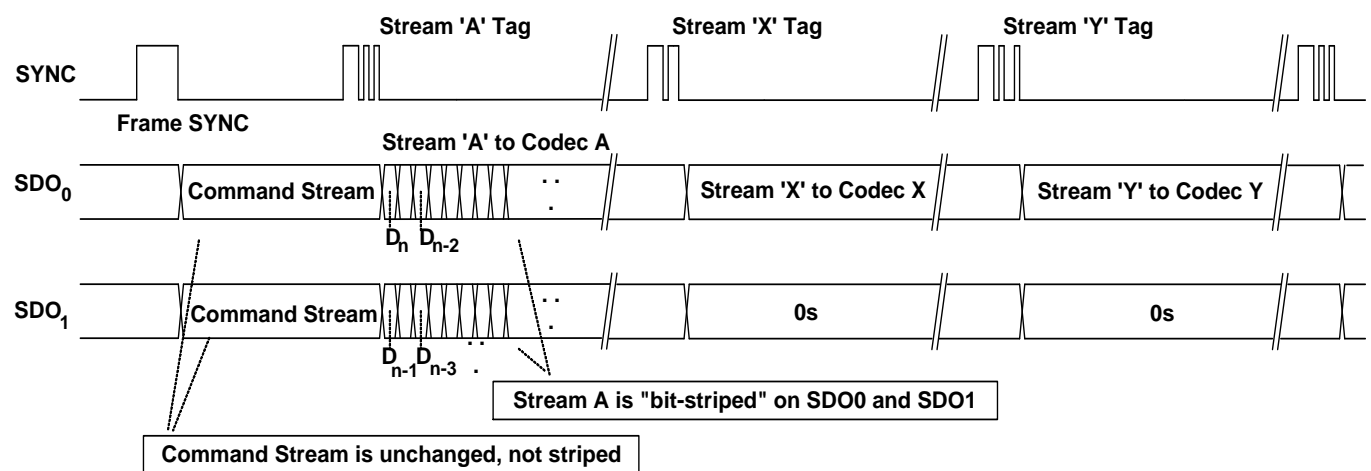


Figure 10. Striped Stream on Multiple SDOs

7.2.3. Inbound Frame-Single SDI

An Inbound Frame-Single SDI is composed of one 36-bit response stream and multiple data streams. Except for the initialization sequence (turnaround and address frame), SDI is driven by the codec at each rising edge of BCLK. The controller also samples data at the rising edge of BCLK (Figure 11).

The SDI stream tag is not carried by SYNC, but included in the SDI. A complete SDI data stream includes one 4-bit stream tag, one 6-bit data length, and n-bit sample blocks. Zeros will be padded if the total length of the contiguous sample blocks within a given stream is not of integral byte length (Figure 12).

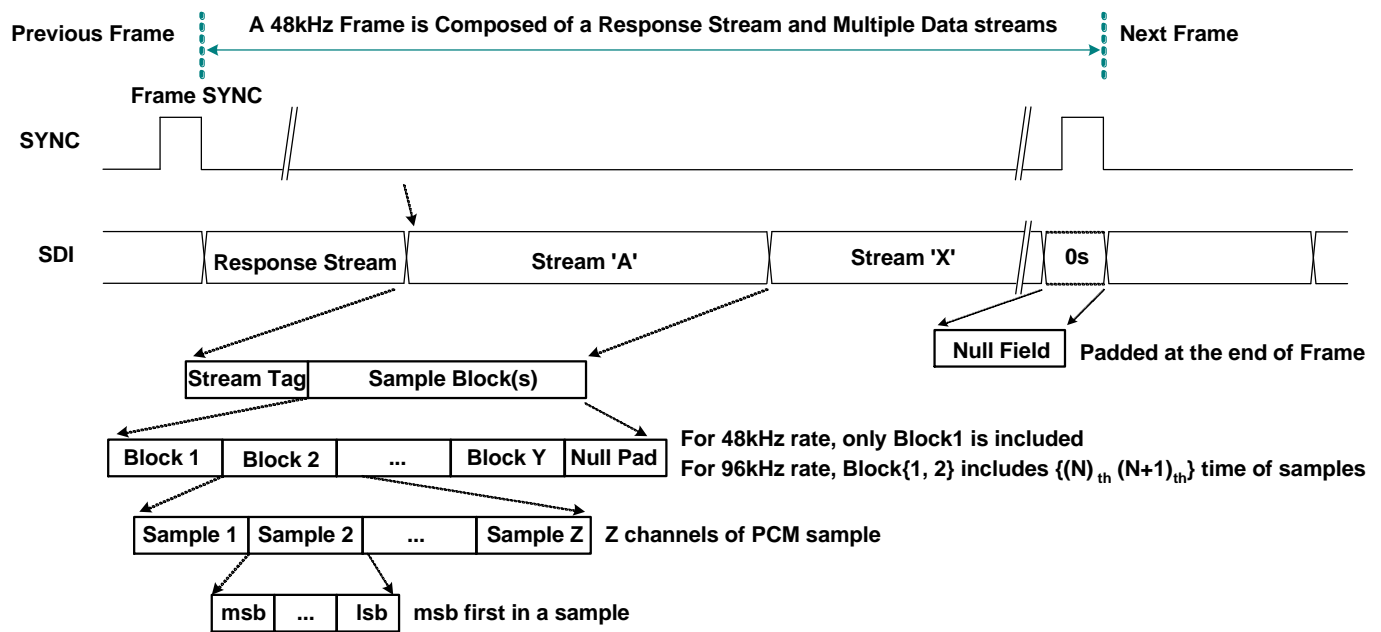


Figure 11. SDI Inbound Stream

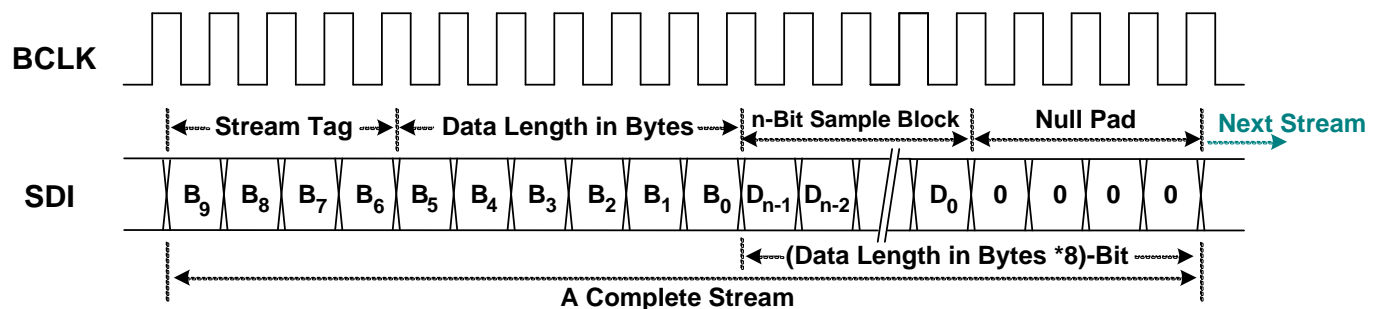


Figure 12. SDI Stream Tag and Data

7.2.4. Inbound Frame-Multiple SDIs

A codec can deliver data to the controller on multiple SDIs to achieve higher bandwidth. If an inbound stream exceeds the data transfer limits of a single SDI, the codec can divide the data onto separate SDI signals, each of which operate independently, with different stream numbers at the same frame time. This is similar to having multiple codecs connected to the controller. The controller samples the divided stream into separate memory with multiple DMA descriptors, then software re-combines the divided data into a meaningful stream.

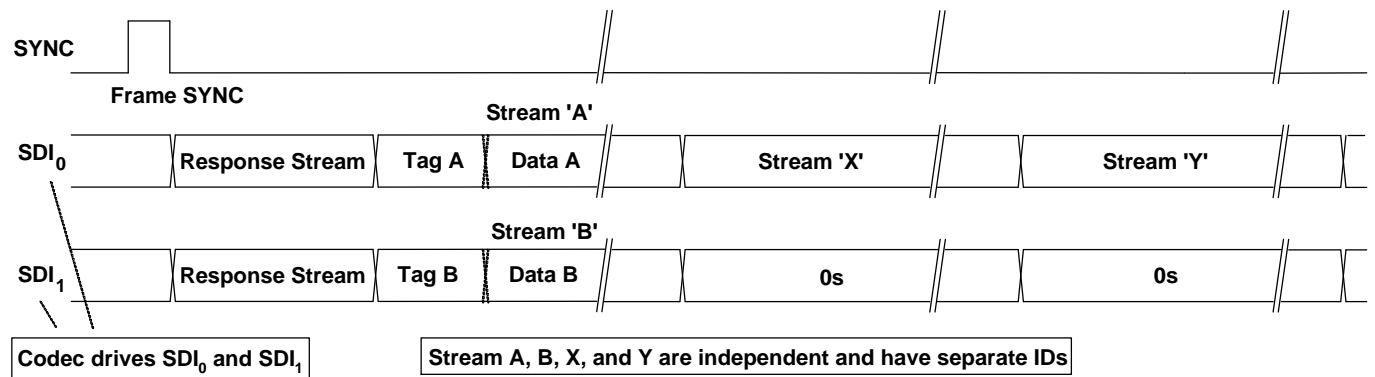


Figure 13. Codec Transmits Data Over Multiple SDIs

7.2.5. Variable Sample Rates

The HDA link is designed for sample rates of 48kHz. Variable sample rates are delivered in multiple or sub-multiple rates of 48kHz. Two sample blocks per frame result in a 96kHz delivery rate, one sample block over two frames results in a 24kHz delivery rate. The HDA specification states that the sample rate of the outbound stream be synchronized by the controller, not by the codec. Each stream has its own sample rate, independent of any other stream.

The HDA controller supports 48kHz and 44.1kHz base rates. Table 7, page 19, shows the recommended sample rates based on multiples or sub-multiples of one of the two base rates.

Rates in sub-multiples (1/n) of 48kHz are interleaving n frames containing no sample blocks. Rates in multiples (n) of 48kHz contain n sample blocks in a frame. Table 8, page 19, shows the delivery cadence of variable rates based on 48kHz.

The HDA link is defined to operate at a fixed 48kHz frame rate. To deliver samples in (sub) multiple rates of 44.1kHz, an appropriate ratio between 44.1kHz and 48kHz must be maintained to avoid frequency drift. The appropriate ratio between 44.1kHz and 48kHz is 147/160. Meaning 147 sample blocks are transmitted every 160 frames.

The cadence ‘12-11-11-12-11-11-12-11-11-12-11-11-11- (repeat)’ interleaves 13 frames containing no sample blocks in every 160 frames. It provides a low long-term frequency drift for 44.1kHz of delivery rate. Rates in sub-multiples (1/n) of 44.1kHz also follow this cadence *and* interleave n empty frames. Rates in multiples (n) of 44.1kHz applying this cadence contain n sample blocks in the non-empty frame AND interleave an empty frame between non-empty frames (Table 9 , page 20).

Table 7. Defined Sample Rate and Transmission Rate

(Sub) Multiple	48kHz Base	44.1kHz Base
1/6	8kHz (1 sample block every 6 frames)	-
1/4	12kHz (1 sample block every 4 frames)	11.025kHz (1 sample block every 4 frames)
1/3	16kHz (1 sample block every 3 frames)	-
1/2	-	22.05kHz (1 sample block every 2 frames)
2/3	32kHz (2 sample blocks every 3 frames)	-
1	48kHz (1 sample block per frame)	44.1kHz (1 sample block per frame)
2	96kHz (2 sample blocks per frame)	88.2kHz (2 sample blocks per frame)
4	192kHz (4 sample blocks per frame)	176.4kHz (4 sample blocks per frame)

Table 8. 48kHz Variable Rate of Delivery Timing

Rate	Delivery Cadence	Description
8kHz	YNNNNN (repeat)	One sample block is transmitted in every 6 frames
12kHz	YNNN (repeat)	One sample block is transmitted in every 4 frames
16kHz	YNN (repeat)	One sample block is transmitted in every 3 frames
32kHz	Y ² NN (repeat)	One sample block is transmitted in every 6 frames
48kHz	Y (repeat)	One sample block is transmitted in each frames
96kHz	Y ² (repeat)	Two sample blocks are transmitted in each frame
192kHz	Y ⁴ (repeat)	Four sample blocks are transmitted in each frame

N: No sample block in a frame

Y: One sample block in a frame

Yx: X sample blocks in a frame

Rate	Delivery Cadence
11.025kHz	{12}{-}{11}{-}{11}{-}{12}{-}{11}{-}{11}{-}{12}{-}{11}{-}{11}{-}{12}{-}{11}{-}{11}{-}{11}{-}{-} (repeat)
22.05kHz	{12}{-}{11}{-}{11}{-}{12}{-}{11}{-}{11}{-}{12}{-}{11}{-}{11}{-}{12}{-}{11}{-}{11}{-}{11}{-}{-} (repeat)
44.1kHz	12-11-11-12-11-11-12-11-11-12-11-11-11- (repeat)
88.2kHz	12 ² -11 ² -11 ² -12 ² -11 ² -11 ² -12 ² -11 ² -11 ² -12 ² -11 ² -11 ² - (repeat)
176.4kHz	12 ⁴ -11 ⁴ -11 ⁴ -12 ⁴ -11 ⁴ -11 ⁴ -12 ⁴ -11 ⁴ -11 ⁴ -12 ⁴ -11 ⁴ -11 ⁴ - (repeat)

22.050kHz: {12}=YNYNYNYNYNYNYNYNYNYNYNYNYNYNYNY
 {11}=YNYNYNYNYNYNYNYNYNYNYNYNYNYNYNY
 { - }=NN

44.1kHz	12- =Contiguous 12 frames containing 1 sample blocks each, followed by one frame with no sample block.
88.2kHz	12 ² - =Contiguous 12 frames containing 2 sample blocks each, followed by one frame with no sample block.
176.4kHz	12 ⁴ - =Contiguous 12 frames containing 4 sample blocks each, followed by one frame with no sample block.

7.3. Reset and Initialization

There are two types of reset within an HDA link:

- **Link Reset**
Generated by assertion of the RESET# signal. All codecs return to their power-on state
- **Codec Reset**
Generated by software directing a command to reset a specific codec back to its default state

An initialization sequence is requested after any of the following three events:

- Link Reset
- Codec Reset
- Codec changes its power state, e.g., hot docking a codec to an HDA system

7.3.1. Link Reset

A link reset may be caused by any of the following three events:

1. The HDA controller asserts RESET# for any reason (power up, or PCI reset)
2. Software initiates a link reset via the 'CRST' bit in the Global Control Register (GCR) of the HDA controller
3. Software initiates power management sequences. Figure 14, page 22, shows the 'Link Reset' timing including the 'Enter' sequence (❶~❸) and 'Exit' sequence (❹~❺)

Enter 'Link Reset':

- ❶ Software writes a 0 to the 'CRST' bit in the Global Control Register of the HDA controller to initiate a link reset
- ❷ As the controller completes the current frame, it does not signal the normal 8-bit frame SYNC at the end of the frame
- ❸ The controller drives SYNC and all SDOs to low. Codecs also drive SDIs to low
- ❹ The controller asserts the RESET# signal to low, and enters the 'Link Reset' state
- ❺ All link signals driven by controller and codecs should be tri-state by internal pull-low resistors

Exit from ‘Link Reset’:

- ⑥ If BCLK is re-started for any reason (codec, wake-up event, power management, etc.)
- ⑦ Software is responsible for de-asserting RESET# after a minimum of 100μs BCLK running time (the 100μsec provides time for the codec PLL to stabilize)
- ⑧ Minimum of 4 BCLKs after RESET# is de-asserted, the controller starts to signal normal frame SYNC
- ⑨ The codec drives its SDI to request an initialization sequence (when the SDI is driven high at the last bit of frame SYNC)

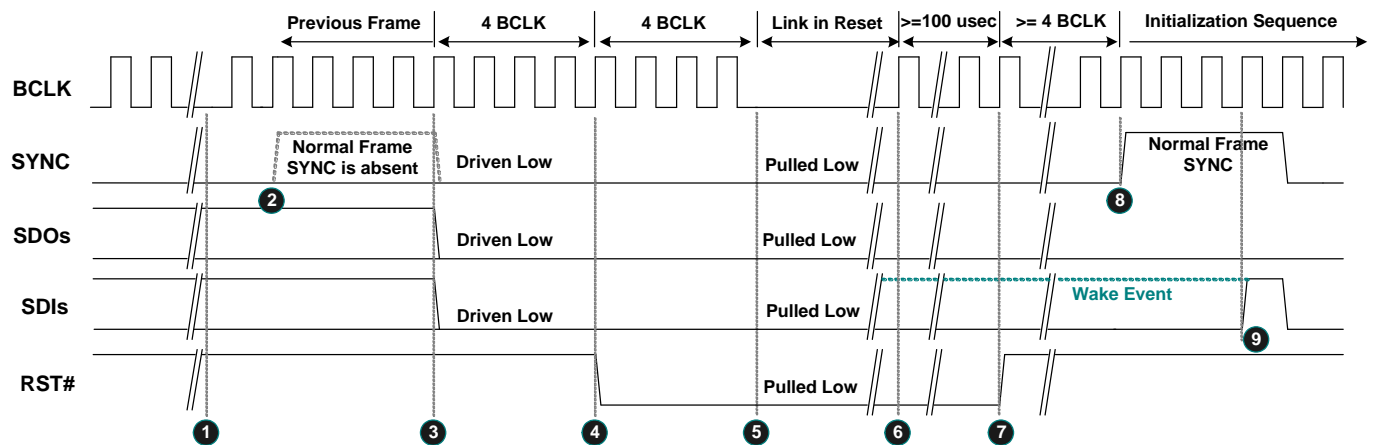


Figure 14. Link Reset Timing

7.3.2. Codec Reset

A ‘Codec Reset’ is initiated via the Codec RESET command verb. It results in the target codec being reset to the default state. After the target codec completes its reset operation, an initialization sequence is requested.

In the ALC233-VB, the extend power state of conforming to Intel low power ECR the function reset could not initialize the register setting. Host SW needs to send “two” function reset consecutively to reset all settings.

7.3.3. Codec Initialization Sequence

- ❶ The codec drives SDI high at the last bit of SYNC to request a Codec Address (CAD) from the controller
- ❷ The codec stops driving the SDI during this turnaround period
- ❸❹❺❻ The controller drives SDI to assign a CAD to the codec
- ❼ The controller releases the SDI after the CAD has been assigned
- ❽ Normal operating state

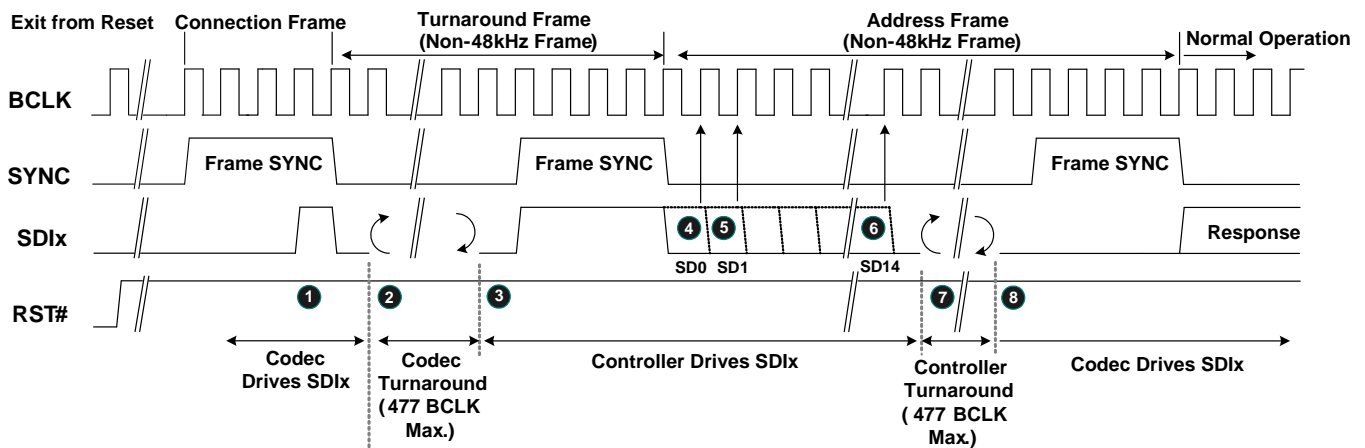


Figure 15. Codec Initialization Sequence

7.4. Verb and Response Format

7.4.1. Command Verb Format

There are two types of verbs: one with 4-bit identifiers (4-bit verbs) and 16-bits of data, the other with 12-bit identifiers (12-bit verbs) and 8-bits of data. Table 10 shows the 4-bit verb structure of a command stream sent from the controller to operate the codec. Table 11 is the 12-bit verb structure that gets and controls parameters in the codec.

Table 10. 40-Bit Commands in 4-Bit Verb Format

Bit [39:32]	Bit [31:28]	Bit [27:20]	Bit [19:16]	Bit [15:0]
Reserved	Codec Address	Node ID	Verb ID	Payload

Table 11. 40-Bit Commands in 12-Bit Verb Format

Bit [39:32]	Bit [31:28]	Bit [27:20]	Bit [19:8]	Bit [7:0]
Reserved	Codec Address	Node ID	Verb ID	Payload

Table 12. Supported Commands

Supported Verb	Get Verb	Set Verb	Root Node	Audio Function Group	Modem Function Group ^{*1}	HDMI Function Group ^{*1}	Vendor Define Group ^{*1}	Audio Out Converter	Audio In Converter	Pin Widget	Sum Widget	Selector Widget	Power Widget ^{*1}	Volume Knob	Beep Generator	Vendor Defined Widget
Get Parameter	F00	-	Y	Y	-	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y
Connection Select	F01	701	-	-	-	-	-	-	Y	Y	-	Y	-	-	-	-
Get Connection List Entry	F02	-	-	-	-	-	-	-	Y	Y	Y	Y	-	-	-	-
Processing State	F03	703	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Coefficient Index	D--	5--	-	-	-	-	-	-	-	-	-	-	-	-	-	Y
Processing Coefficient	C--	4--	-	-	-	-	-	-	-	-	-	-	-	-	-	Y
Amplifier Gain/Mute	B--	3--	-	-	-	-	-	-	Y	Y	Y	-	-	-	-	-
Stream Format	A--	2--	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-
Digital Converter 1	F0D	70D	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-
Digital Converter 2	F0D	70E	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-
Digital Converter 3	F3D	73D	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-
Digital Converter 4	F3E	73E	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-
Power State	F05	705	-	Y	-	-	-	Y	Y	Y	-	-	-	-	-	-
Channel / Stream ID	F06	706	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-
SDI Select	F04	704	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pin Widget Control	F07	707	-	-	-	-	-	-	-	Y	-	-	-	-	-	-
Unsolicited Enable	F08	708	-	-	-	-	-	-	-	Y	-	-	-	Y	-	-
Pin Sense	F09	709	-	-	-	-	-	-	-	Y	-	-	-	-	-	-
EAPD Control	F0C	70C	-	-	-	-	-	-	-	Y	-	-	-	-	-	-
All GPIO Control	F10-F1A	710-71A	-	Y	-	-	-	-	-	-	-	-	-	-	-	-
Beep Generator Control	F0A	70A	-	-	-	-	-	-	-	-	-	-	-	-	Y	-
Volume Knob Control	F0F	70F	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Subsystem ID, Byte 0	F20	720	-	Y	-	-	-	-	-	-	-	-	-	-	-	-
Subsystem ID, Byte 1	F20	721	-	Y	-	-	-	-	-	-	-	-	-	-	-	-
Subsystem ID, Byte 2	F20	722	-	Y	-	-	-	-	-	-	-	-	-	-	-	-
Subsystem ID, Byte 3	F20	723	-	Y	-	-	-	-	-	-	-	-	-	-	-	-
Config Default, Byte 0	F1C	71C	-	-	-	-	-	-	-	Y	-	-	-	-	-	-
Config Default, Byte 1	F1C	71D	-	-	-	-	-	-	-	Y	-	-	-	-	-	-
Config Default, Byte 2	F1C	71E	-	-	-	-	-	-	-	Y	-	-	-	-	-	-
Config Default, Byte 3	F1C	71F	-	-	-	-	-	-	-	Y	-	-	-	-	-	-
Function RESET	-	7FF	-	Y	-	-	-	-	-	-	-	-	-	-	-	-

^{*1}: The ALC233-VB does not support Modem/HDMI/Vendor groups and Power State widgets.

Table 13. Supported Parameters

Supported Parameter	Parameter ID	Root Node	Audio Function Group	Modem Function Group ^{*1}	HDMI Function Group ^{*1}	Vendor Define Group ^{*1}	Audio Out Converter	Audio In Converter	Pin Widget	Sum Widget	Selector Widget	Power Widget ^{*1}	Volume Knob	Beep Generator	Vendor Defined Widget
Vendor ID	00	Y	-	-	-	-	-	-	-	-	-	-	-	-	-
Revision ID	02	Y	-	-	-	-	-	-	-	-	-	-	-	-	-
Subordinate Node Count	04	Y	Y	-	-	-	-	-	-	-	-	-	-	-	-
Function Group Type	05	-	Y	-	-	-	-	-	-	-	-	-	-	-	-
Audio Function Group Capabilities	08	-	Y	-	-	-	-	-	-	-	-	-	-	-	-
Audio Widget Capabilities	09	-	-	-	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y
Sample Size, Rate	0A	-	Y	-	-	-	Y	Y	-	-	-	-	-	-	-
Stream Formats	0B	-	Y	-	-	-	Y	Y	-	-	-	-	-	-	-
Pin Capabilities	0C	-	-	-	-	-	-	-	Y	-	-	-	-	-	-
Input Amp Capabilities	0D	-	-	-	-	-	-	Y	-	Y	Y	-	-	-	-
Output Amp Capabilities	12	-	-	-	-	-	-	-	Y	Y	-	-	-	-	-
Connection List Length	0E	-	-	-	-	-	-	Y	Y	Y	Y	-	-	-	-
Supported Power States	0F	-	Y	-	-	-	Y	Y	Y	Y	Y	-	-	-	Y
Processing Capabilities	10	-	-	-	-	-	-	-	-	-	-	-	-	-	Y
GPI/O Count	11	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Volume Knob Capabilities	13	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*1}: The ALC233-VB does not support Modem/HDMI/Vendor groups and Power State widgets.

7.4.2. Response Format

There are two types of response from the codec to the controller. Solicited Responses are returned by the codec in response to a current command verb. The codec will send Solicited Response data in the next frame, without regard to the Set (Write) or Get (Read) command. The 32-bit response is interpreted by software, opaque to the controller.

Unsolicited Responses are sent by the codec independently of software requests. Jack Detection or GPI status information can be actively delivered to the controller and interpreted by software. The ‘Tag’ in Bit[31:28] is used to identify unsolicited events. This tag is undefined in the HDA specifications.

Table 14. Solicited Response Format

Bit [35]	Bit [34]	Bit [33:32]	Bit [31:0]
Valid	Unsol=0	Reserved	Response

Table 15. Unsolicited Response Format

Bit [35]	Bit [34]	Bit [33:32]	Bit [31:28]	Bit [27:0]
Valid	Unsol=1	Reserved	Tag	Response

7.4.3. Double Function Reset

This new reset is created by sending two Function Group resets back to back. This Function Group ‘Double’ reset shall do a full initialization and reset all settings to their power on defaults. A Double reset is defined as two Function Group Reset verbs received without any other intervening valid verbs. The reset verbs are not required to be received in sequential frames, but there must not be any other verbs received in frames between the receipt of the Function Group Reset verbs. It is allowed that there are several null commands received in frames between Function Group Reset verbs.

7.5. Power Management

The ALC233-VB is designed to meet Intel's low-power-state white paper and is ECR HDA-015B compliant. It meets the five attributes discussed in the white paper:

1. D3 state power < 30mW (without PC-Beep pass-through Function, with PC-Beep pass-through Function, the criteria is 60mW).
2. Exit latency (D3 to D0 transfer) < 10ms.
3. Audio pop/click suppression during D3 and D0 transition < -65dBV.
4. Supports Jack detection in D3 state.
5. D3 functions with or without the BITCLK.

The ALC233-VB minimizes D3 state idle mode power consumption and increases overall battery life in mobile systems.

In D3 mode, only a power on reset or a 'double function reset' resets all ALC233-VB settings, cutting software configuration time spent entering/leaving D3 state, and reducing latency time for D3 to D0 transitions.

The ALC233-VB supports Wake-Up events in D3 mode, including jack detection and GPIO status changes. If the HDA-Link was alive (with BCLK), the ALC233-VB Wake-Up response is as normal. If no BITCLK is present, the ALC233-VB drives the SDI high in order to wake up the system.

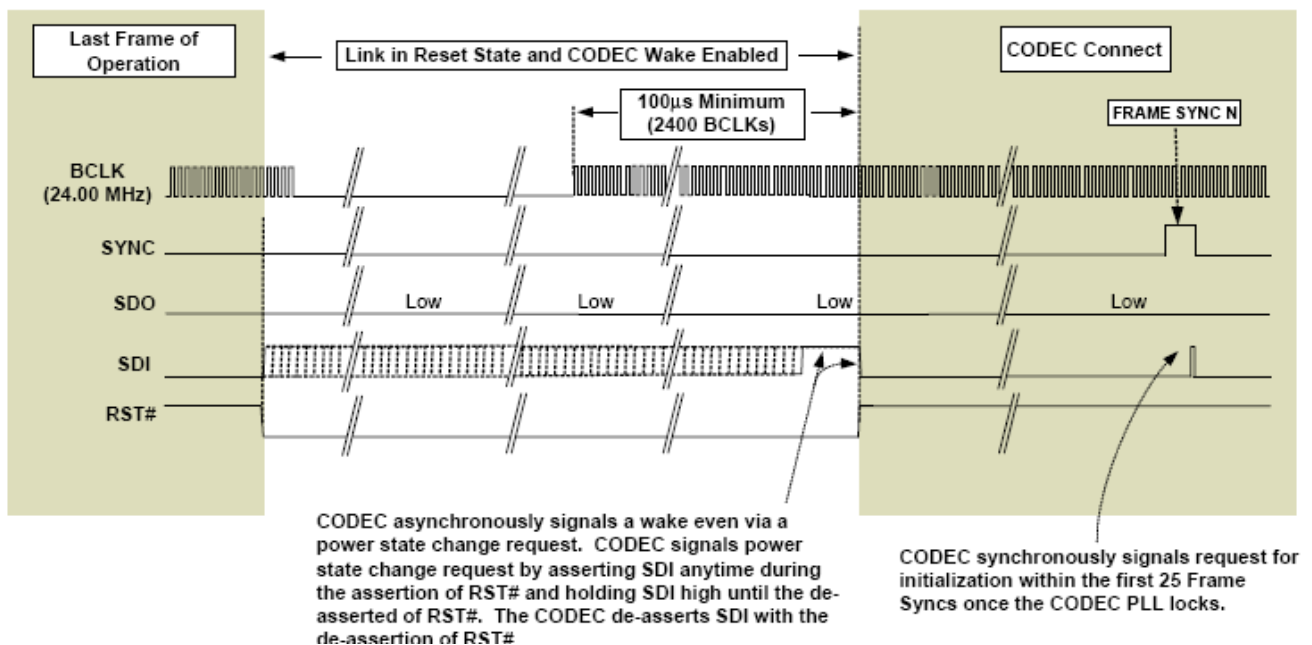


Figure 16. Resume From External Event (Wake-Up Event)

All power management state changes in widgets are driven by software. Table 16 shows the System Power State Definitions.

In the ALC233-VB, all the widgets, including output/input converters, support power control. Software may have various power states depending on system configuration. Table 17 indicates those nodes that support power management. To simplify power control, software can configure whole codec power states through the audio function (NID=01h). Output converters (DACs) and input converters (ADCs) have no individual power control to supply fine-grained power control.

Table 16. System Power State Definitions

Power States	Definitions
D0	All power on. Individual DACs and ADCs can be powered up or down as required.
D1	All amplifiers and converters (DACs and ADCs) are powered down. State maintained, analog reference stays up.
D2	All amplifiers and converters (DACs and ADCs) are powered down. State maintained, but analog reference is off (D1 + analog reference off).
D3	Power still supplied. The codec stops the internal clock. State is maintained.
D3 (No BitCLK)	Power still supplied, BITCLK stopped, and Reset in low state.
D3Cold	The codec will no longer respond to further commands and power can be removed from the codec.

Table 17. Power Controls in NID 01h

Description		D0	D1	D2	D3	D3 (No bclk)	Link Reset
Audio Function (NID=01h)	LINK Response	Normal	Normal	Normal	PD	PD	PD
	DACs	Normal	PD	PD	PD	PD	PD
	ADCs	Normal	PD	PD	PD	PD	PD
	All Headphone Drivers	Normal	Normal	PD	PD	PD	Normal
	All Mixers	Normal	Normal	PD	PD	PD	Normal
	All Reference	Normal	Normal	PD	PD	PD	Normal

Table 18. Powered Down Conditions

Condition	Description
LINK Response powered down	Internal clock is stopped. SDATA-IN and SPDIF-OUT are floated with pulled low 47K resistors internally. SPDIF-IN is also floated. Detection of 'Link Reset Entry' and 'Link Reset Exit' sequences are supported. All states are maintained if DVDD is supplied.
DACs powered down	Analog block and digital filter are powered down.
ADCs powered down	Analog block and digital filter are powered down. Data on SDATA-IN is quiet.
Headphone Driver powered down	All headphone drivers are powered down.
Mixers powered down	All internal mixer widgets are powered down. The DC reference and VREFOUTx at individual pin complexes are still alive.
Reference power down	All internal references, DC reference, and VREFOUTx at individual pin complexes are off.

8. Supported Verbs and Parameters

This section describes the Verbs and Parameters supported by various widgets in the ALC233-VB. If a verb is not supported by the addressed widget, it will respond with 32 bits of '0'.

8.1. Verb-Get Parameters (Verb ID=F00h)

The 'Get Parameters' verb is used to get system information and the function capabilities of the HDA codec. All the parameters are read-only. There are a total of 15 ID parameters defined for each widget. Some parameters are supported only in a specific widget. Refer to section 7.4.1 Command Verb Format, page 23, to get detailed information about supported parameters.

Table 19. Verb-Get Parameters (Verb ID=F00h)

Get Parameter Command Format				Codec Response Format	
Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]	Response [31:0]	
CAd=X	Node ID=00h	Verb ID=F00h	Parameter ID[7:0]	32-bit Response	

Note: If the parameter ID is not supported, the returned response is 32 bits of '0'.

8.1.1. Parameter-Vendor ID (Verb ID=F00h, Parameter ID=00h)

Table 20. Parameter-Vendor ID (Verb ID=F00h, Parameter ID=00h)

Codec Response Format	
Bit	Description
31:16	Vendor ID=10ECh (Realtek's PCI vendor ID).
15:0	Device ID=0235h.

Note 1: The Root Node (NID=00h) supports this parameter.

8.1.2. Parameter-Revision ID (Verb ID=F00h, Parameter ID=02h)

Table 21. Parameter-Revision ID (Verb ID=F00h, Parameter ID=02h)

Codec Response Format	
Bit	Description
31:24	Reserved. Read as 0's.
23:20	MajRev=1h. The major version number (in decimal) of the HDA Specification to which the ALC233-VB is fully compliant.
19:16	MinRev=0h. The minor version number (in decimal) of the HDA Specification to which the ALC233-VB is fully compliant.
15:8	Revision ID. The vendor's revision number. <i>Note: 00h indicates ALC233-VB silicon.</i>
7:0	Stepping ID. The vendor's stepping number within the given Revision ID.

Note: The Root Node (NID=00h) supports this parameter.

8.1.3. Parameter-Subordinate Node Count (Verb ID=F00h, Parameter ID=04h)

For the root node, the Subordinate Node Count provides information about audio function group nodes associated with the root node.

For function group nodes, it provides the total number of widgets associated with this function node.

Table 22. Parameter-Subordinate Node Count (Verb ID=F00h, Parameter ID=04h)

Codec Response Format

Bit	Description
31:24	Reserved. Read as 0's.
23:16	Starting Node Number. The starting node number in the sequential widgets
15:8	Reserved. Read as 0's.
7:0	Total Number of Nodes. For a root node, this is the total number of function groups in the root node. For a function group, this is the total number of widget nodes in the function group.

8.1.4. Parameter-Function Group Type (Verb ID=F00h, Parameter ID=05h)

Table 23. Parameter-Function Group Type (Verb ID=F00h, Parameter ID=05h)

Codec Response Format

Bit	Description
31:9	Reserved. Read as 0's.
8	UnSol Capable. 0: Unsolicited response is not supported by this function group. 1: Unsolicited response is supported by this function group.
7:0	Function Group Type. 00h: Reserved 01h: Audio Function 02h: Modem Function 03h~7Fh: Reserved 80h~FFh: Vendor Defined Function

8.1.5. Parameter-Audio Function Capabilities (Verb ID=F00h, Parameter ID=08h)

Table 24. Parameter-Audio Function Capabilities (Verb ID=F00h, Parameter ID=08h)

Codec Response Format

Bit	Description
31:17	Reserved. Read as 0's.
16	Beep Generator. A '1' indicates the presence of an integrated Beep generator within the Audio Function Group.
15:12	Reserved. Read as 0's.
11:8	Input Delay. Number of samples delay from analog input to HDA link.
7:4	Reserved. Read as 0's.
3:0	Output Delay. Number of samples delay from HDA link to analog output.

8.1.6. Parameter-Audio Widget Capabilities (Verb ID=F00h, Parameter ID=09h)

Table 25. Parameter-Audio Widget Capabilities (Verb ID=F00h, Parameter ID=09h)

Codec Response Format

Bit	Description
31:24	Reserved. Read as 0's.
23:20	Widget Type. 0h: Audio Output 1h: Audio Input 2h: Mixer3h: Selector 4h: Pin Complex 5h: Power Widget 6h: Volume Knob Widget 7h~Eh: Reserved Fh: Vendor defined audio widget
19:16	Delay. Samples delayed between the HDA link and widgets.
15:12	Reserved. Read as 0's.
11:	L-R Swap. 0: Left channel and right channel swapping is not supported 1: Left channel and right channel swapping is supported
10	Power Control. 0: Power control is not supported on this widget 1: Power control is supported on this widget
9	Digital. 0: An analog input or output converter 1: A widget translating digital data between the HDA link and digital I/O (SPDIF, I2S, etc.)
8	ConnList. Connection List. 0: Connected to HDA link. No Connection List Entry will be queried 1: Connection List Entry must be queried
7	UnsolCap. Unsolicited Capable. 0: Unsolicited response is not supported 1: Unsolicited response is supported
6	ProcWidget. Processing Widget. 0: No processing control 1: Processing control is supported
5	Reserved. Read as 0.
4	Format Override. <i>Note: The ALC233-VB supports 16/20/24-bit with 44.1kHz, 48kHz, 96kHz, and 192kHz sample rate. The format (parameter ID=0Ah) must be queried</i>
3	AmpParOvr (AMP Param Override). Override amplifier parameters (Gain Control) in individual output Pin Complexes, ADCs, and Mixer widgets.
2	OutAmpPre (Out AMP Present).
1	InAmpPre (In AMP Present). There are amplifiers (Gain Control) in individual ADCs and Mixer widgets.
0	Stereo. 0: Mono Widget 1: Stereo Widget

8.1.7. Parameter-Supported PCM Size, Rates (Verb ID=F00h, Parameter ID=0Ah)

Parameters in audio functions provide default information about formats. Individual converters have their own parameters to provide supported formats if their 'Format Override' bit is set.

Table 26. Parameter-Supported PCM Size, Rates (Verb ID=F00h, Parameter ID=0Ah)

Codec Response Format

Bit	Description
31:21	Reserved. Read as 0's.
20	B32. 32-bit audio format support. 0: Not supported 1: Supported
19	B24. 24-bit audio format support. 0: Not supported 1: Supported (The ALC233-VB DAC and ADC supports this format)
18	B20. 20-bit audio format support. 0: Not supported 1: Supported (The ALC233-VB DAC and ADC supports this format)
17	B16. 16-bit audio format support. 0: Not supported 1: Supported (The ALC233-VB DAC and ADC supports this format)
16	B8. 8-bit audio format support. 0: Not supported 1: Supported
15:12	Reserved. Read as 0's.
11	R12. 384kHz (=8*48kHz) rate support. 0: Not supported 1: Supported
10	R11. 192kHz (=4*48kHz) rate support. 0: Not supported 1: Supported (The ALC233-VB DAC and ADC support this sample rate)
9	R10. 176.4kHz (=4*44.1kHz) rate support. 0: Not supported 1: Supported
8	R9. 96kHz (=2*48kHz) rate support. 0: Not supported 1: Supported (The ALC233-VB DAC and ADC support this sample rate)
7	R8. 88.2kHz (=2*44.1kHz) rate support. 0: Not supported 1: Supported
6	R7. 48kHz rate support. 0: Not supported 1: Supported (The ALC233-VB DAC and ADC support this sample rate)
5	R6. 44.1kHz rate support. 0: Not supported 1: Supported (ALC233-VB DAC and ADC support this sample rate)
4	R5. 32kHz (=2/3*48kHz) rate support. 0: Not supported 1: Supported
3	R4. 22.05kHz (=1/2*44.1kHz) rate support. 0: Not supported 1: Supported
2	R3. 16kHz (=1/3*48kHz) rate support. 0: Not supported 1: Supported
1	R2. 11.025kHz (=1/4*44.1kHz) rate support. 0: Not supported 1: Supported

Codec Response Format

Bit	Description
0	R1. 8kHz (=1/6*48kHz) rate support. 0: Not supported 1: Supported

8.1.8. Parameter-Supported Stream Formats (Verb ID=F00h, Parameter ID=0Bh)

Parameters in this node only provide default information for audio function groups. Individual converters have their own parameters to provide supported formats if the 'Format Override' bit is set.

Table 27. Parameter-Supported Stream Formats (Verb ID=F00h, Parameter ID=0Bh)
Codec Response Format

Bit	Description
31:3	Reserved. Read as 0's.
2	AC3. 0: Not supported 1: Supported
1	Float32. 0: Not supported 1: Supported
0	PCM. 0: Not supported 1: Supported (The ALC233-VB DAC and ADC support this format)

Note: Input converters and output converters support this parameter.

8.1.9. Parameter-Pin Capabilities (Verb ID=F00h, Parameter ID=0Ch)

The Pin Capabilities parameter returns a bit field describing the capabilities of the Pin Complex widget.

Table 28. Parameter-Pin Capabilities (Verb ID=F00h, Parameter ID=0Ch)
Codec Response Format

Bit	Description														
31:16	Reserved. Read as 0's.														
15:8	VREF Control Capability. '1' in corresponding bit field indicates signal levels of associated Vrefout are specified as a percentage of AVDD. <table><tr><td>7:6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td>0</td></tr><tr><td>Reserved</td><td>100%</td><td>80%</td><td>Reserved</td><td>Ground</td><td>50%</td><td>Hi-Z</td></tr></table>	7:6	5	4	3	2	1	0	Reserved	100%	80%	Reserved	Ground	50%	Hi-Z
7:6	5	4	3	2	1	0									
Reserved	100%	80%	Reserved	Ground	50%	Hi-Z									
7	Reserved.														
6	Balanced I/O Pin. '1' indicates this pin complex has balanced pins.														
5	Input Capable. '1' indicates this pin complex supports input.														
4	Output Capable. '1' indicates this pin complex supports output.														

Codec Response Format

Bit	Description
3	Headphone Drive Capable. '1' indicates this pin complex has an amplifier to drive a headphone.
2	Presence Detect Capable. '1' indicates this pin complex can detect whether there is a device plugged in.
1	Trigger Required. '1' indicates whether a software trigger is required for an impedance measurement.
0	Impedance Sense Capable. '1' indicates this pin complex can perform analog sense on the attached device to determine its type.

Note: Only Pin Complex widgets support this parameter.

8.1.10. Parameter-Amplifier Capabilities (Verb ID=F00h, Input Amplifier Parameter ID=0Dh)

Parameters in this node provide audio function group default information. Individual converters have their own parameters to provide amplifier capabilities if the 'AMP Param Override' bit is set.

Table 29. Parameter-Amplifier Capabilities (Verb ID=F00h, Input Amplifier Parameter ID=0Dh)

Codec Response Format

Bit	Description
31	(Input) Mute Capable.
30:23	Reserved. Read as 0.
22:16	Step Size. Indicates the size of each step in the gain range.
15	Reserved. Read as 0.
14:8	Number of Steps. Indicates the number of steps in the gain range. '0' means the gain is fixed.
7	Reserved. Read as 0.
6:0	Offset. Indicates which step is 0dB.

8.1.11. Parameter-Amplifier Capabilities (Verb ID=F00h, Output Amplifier Parameter ID=12h)

Parameters in this node provide audio function group default information. Individual converters have their own parameters to provide amplifier capabilities if the 'AMP Param Override' bit is set.

Table 30. Parameter-Amplifier Capabilities (Verb ID=F00h, Output Amplifier Parameter ID=12h)

Codec Response Format

Bit	Description
31	(Output) Mute Capable.
30:23	Reserved. Read as 0.
22:16	Step Size. Indicates the size of each step in the gain range. Each individual step may be 0~32dB, specified in 0.25dB steps. '0' indicates 0.25dB steps. '127' indicates 32dB steps.
15	Reserved. Read as 0.

Codec Response Format

Bit	Description
14:8	Number of Steps. Indicates the number of steps in the gain range. '0' means the gain is fixed.
7	Reserved. Read as 0.
6:0	Offset. Indicates which step is 0dB.

8.1.12. Parameter-Connect List Length (Verb ID=F00h, Parameter ID=0Eh)

Parameters in this node provide audio function widget connection information.

Table 31. Parameter-Connect List Length (Verb ID=F00h, Parameter ID=0Eh)

Codec Response Format

Bit	Description
31:8	Reserved. Read as 0.
7	Short Form. 0: Short Form 1: Long Form
6:0	Connect List Length. Indicates the number of inputs connected to a widget. If the Connect List Length is 1, there is only one input, and there is no Connection Select Control (not a MUX widget).

8.1.13. Parameter-Supported Power States (Verb ID=F00h, Parameter ID=0Fh)

Table 32. Parameter-Supported Power States (Verb ID=F00h, Parameter ID=0Fh)

Codec Response Format

Bit	Description
31	Extended Power States Supported (EPSS). 1: Extended power state EPSS is supported
30	CLKSTOP. 1: D3 mode operates even when no BITCLK presents on the link
29:5	Reserved. Read as 0's.
4	D3ColdSup. 1: Power state D3Cold is supported
3	D3Sup. 1: Power state D3 is supported
2	D2Sup 1: Power state D2 is supported
1	D1Sup 1: Power state D1 is supported

Codec Response Format

0	D0Sup 1: Power state D0 is supported
---	---

8.1.14. Parameter-Processing Capabilities (Verb ID=F00h, Parameter ID=10h)

Table 33. Parameter-Processing Capabilities (Verb ID=F00h, Parameter ID=10h)
Codec Response Format

Bit	Description
31:16	Reserved. Read as 0's.
15:8	NumCoeff. Number of Coefficient.
7:1	Reserved. Read as 0's.
0	Benign. 0: Processing unit is not linear and time invariant 1: Processing unit is linear and time invariant

8.1.15. Parameter-GPIO Capabilities (Verb ID=F00h, Parameter ID=11h)

Table 34. Parameter-GPIO Capabilities (Verb ID=F00h, Parameter ID=11h)
Codec Response Format

Bit	Description
31	GPIWake=0. The ALC233-VB does not support GPIO wake-up function.
30	GPIUnsol=1. The ALC233-VB supports GPIO unsolicited response.
29:24	Reserved. Read as 0's.
23:16	NumGPIs=00h. No GPI pin is supported.
15:8	NumGPOs=00h. No GPO pin is supported.
7:0	NumGPIOs=03h. Three GPIO pins are supported.

8.1.16. Parameter-Volume Knob Capabilities (Verb ID=F00h, Parameter ID=13h)

Table 35. Parameter-Volume Knob Capabilities (Verb ID=F00h, Parameter ID=13h)
Codec Response Format Volume Control Knob

Bit	Description
31:8	Reserved. Read as 0's.
7	Delta. 0: Software cannot modify the Volume Control Knob volume 1: Software can write a base volume to the Volume Control Knob
6:0	NumSteps. The number of steps in the range of the Volume Control Knob.

Codec Response Format Volume Control Knob

Note: The ALC233-VB does not support volume knob and will respond with 0s to this parameter.

8.2. Verb-Get Connection Select Control (Verb ID=F01h)

Table 36. Verb-Get Connection Select Control (Verb ID=F01h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=F01h	0's

Codec Response Format

Response [31:0]
Bit[7:0] are Connection Index

Codec Response for NID = 1Bh (LINE2)

Bit	Description
31:8	0's.
7:0	Connection Index Currently Set (Default value is 00h). 00h: Sum Widget NID=0Ch 01h: Sum Widget NID=0Dh Other: Reserved

Codec Response for NID = 21h (HP-OUT)

Bit	Description
31:8	0's.
7:0	Connection Index Currently Set (Default value is 00h). 00h: Sum Widget NID=0Ch 01h: Sum Widget NID=0Dh Other: Reserved

Codec Response for other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.3. Verb-Set Connection Select (Verb ID=701h)

Table 37. Verb-Set Connection Select (Verb ID=701h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=701h	Select Index [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

8.4. Verb-Get Connection List Entry (Verb ID=F02h)

Table 38. Verb-Get Connection List Entry (Verb ID=F02h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=F02h	Offset Index - N[7:0]

Codec Response Format

Response [31:0]
32-bit Response

Codec Response for NID=08h (ADC)

Bit	Description
31:8	Connection List Entry (N+3), (N+2), and (N+1). Returns 000000h.
7:0	Connection List Entry (N). Returns 23h (Sum Widget) for N=0~3. Returns 00h for N>3.

Codec Response for NID=09h (ADC)

Bit	Description
31:8	Connection List Entry (N+3), (N+2), and (N+1). Returns 000000h.
7:0	Connection List Entry (N). Returns 22h (Sum Widget) for N=0~3. Returns 00h for N>3.

Codec Response for NID=0Bh (Mixer)

Bit	Description
31:24	Connection List Entry (N+3). Return 1Bh (Pin Complex- LINE2) for N=0~3. Return 00h for N>3.
23:16	Connection List Entry (N+2). Return 1Ah (LINE1) for N=0~3. Return 00h for N>3.
15:8	Connection List Entry (N+1). Return 19h (MIC2) for N=0~3. Return 00h for N>3.
7:0	Connection List Entry (N). Return 18h (-RESERVED) for N=0~3. Return 1Dh (PCBEEP) for N=4~7. Return 00h for N>7.

Codec Response for NID=0Ch (LOUT1 Sum)

Bit	Description
31:24	Connection List Entry (N). Returns 00h.
23:16	Connection List Entry (N+2). Returns 00h.
15:8	Connection List Entry (N+1). Returns 0Bh (Mixer) for N=0~3. Returns 00h for N>3.
7:0	Connection List Entry (N). Returns 02h (LOUT1 DAC) for N=0~3. Returns 00h for N>3.

Codec Response for NID=0Dh (LOUT2 Sum)

Bit	Description
31:24	Connection List Entry (N). Returns 00h.
23:16	Connection List Entry (N+2). Returns 00h.
15:8	Connection List Entry (N+1). Returns 0Bh (Mixer) for N=0~3. Returns 00h for N>3.
7:0	Connection List Entry (N). Returns 03h (LOUT2 DAC) for N=0~3. Returns 00h for N>3.

Codec Response for NID=0Fh (MONO Sum)

Bit	Description
31:24	Connection List Entry (N). Returns 00h.
23:16	Connection List Entry (N+2). Returns 00h.
15:8	Connection List Entry (N+1). Returns 00h.
7:0	Connection List Entry (N). Returns 0Dh (LOUT2 DAC) for N=0~3. Returns 00h for N>3.

Codec Response for NID=14h (SPK-OUT)

Bit	Description
31:24	Connection List Entry (N+3). Return 00h.
23:16	Connection List Entry (N+2). Return 00h.
15:8	Connection List Entry (N+1). Return 0Dh (LOUT2 Sum) for N=0~3. Return 00h for N>3.
7:0	Connection List Entry (N). Return 0Ch (LOUT1 Sum) for N=0~3. Return 00h for N>3.

Codec Response for NID=17h (MONO)

Bit	Description
31:8	Connection List Entry (N+3), (N+2), (N+1). Returns 000000h for n>3.
7:0	Connection List Entry (N). Returns 0Fh (MONO sum) for N=0~3. Returns 00h for N>3.

Codec Response for NID=1Bh (LINE2)

Bit	Description
31:24	Connection List Entry (N+3). Return 00h.
23:16	Connection List Entry (N+2). Return 00h for N>3.
15:8	Connection List Entry (N+1). Return 0Dh (Mixer) for N=0~3. Return 00h for N>3.
7:0	Connection List Entry (N). Return 0Ch (Mixer) for N=0~3. Return 00h for N>3.

Codec Response for NID=21h (HP-OUT)

Bit	Description
31:24	Connection List Entry (N+3). Return 00h.
23:16	Connection List Entry (N+2). Return 00h for N>3.
15:8	Connection List Entry (N+1). Return 0Dh (LOUT2 Sum) for N=0~3. Return 00h for N>3.
7:0	Connection List Entry (N). Return 0Ch (LOUT1 Sum) for N=0~3. Return 00h for N>3.

Codec Response for NID=1Eh (SPDIF-OUT)

Bit	Description
31:8	Connection List Entry (N+3), (N+2), and (N+1). Returns 000000h.
7:0	Connection List Entry (N). Returns 06h (SPDIF-OUT Converter) for N=0~3. Returns 00h for N>3.

Codec Response for NID=22h (Sum Widget)

Bit	Description
31:24	Connection List Entry (N+3). Return 1Bh (LINE2) for N=0~3. Return 00h for N>3.
23:16	Connection List Entry (N+2). Return 1Ah (LINE1) for N=0~3. Return 00h for N>3.
15:8	Connection List Entry (N+1). Return 19h (MIC2) for N=0~3. Return 0Bh (Mixer) for N=4~7. Return 00h for N>7.
7:0	Connection List Entry (N). Return 18h (RESERVED) for N=0~3. Return 1Dh (PCBEEP) for N=4~7. Return 00h for N>7.

Codec Response for NID=23h (Sum Widget)

Bit	Description
31:24	Connection List Entry (N+3). Return 1Bh (LINE2) for N=0~3. Return 00h for N>3.
23:16	Connection List Entry (N+2). Return 1Ah (LINE1) for N=0~3. Return 12h (DMIC) for N=4~7. Return 00h for N>7.
15:8	Connection List Entry (N+1). Return 19h (MIC2) for N=0~3. Return 0Bh (Mixer) for N=4~7. Return 00h for N>7.
7:0	Connection List Entry (N). Return 18h (RESERVED) for N=0~3. Return 1Dh (PCBEEP) for N=4~7. Return 00h for N>7.--

Codec Response for Other NID

Bit	Description
31:0	Not Supported (returns 00000000h)

8.5. Verb-Get Processing State (Verb ID=F03h)

Table 39. Verb-Get Processing State (Verb ID=F03h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=F03h	0's

Codec Response Format

Response [31:0]
32-bit response

Codec Response for All NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.6. Verb-Set Processing State (Verb ID=703h)

Table 40. Verb-Set Processing State (Verb ID=703h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=703h	Processing State [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

Codec Response for all NID

Bit	Description
31:0	0's.

8.7. Verb-Get Coefficient Index (Verb ID=Dh)

Table 41. Verb-Get Coefficient Index (Verb ID=Dh)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:16]	Payload Bit [15:0]
CAd=X	Node ID=20h	Verb ID=Dh	0's

Codec Response Format

Response [31:0]
Bit [15:0] are Coefficient Index

Codec Response for NID=20h (Realtek Defined Registers)

Bit	Description
31:16	Reserved. Read as 0's.
15:0	Coefficient Index.

Codec Response for Other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.8. Verb-Set Coefficient Index (Verb ID=5h)

Table 42. Verb-Set Coefficient Index (Verb ID=5h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:16]	Payload Bit [15:0]
CAd=X	Node ID=20h	Verb ID=5h	Coefficient Index [15:0]

Codec Response Format

Response [31:0]
0's for all nodes

Codec Response for All NID

Bit	Description
31:0	0's.

8.9. Verb-Get Processing Coefficient (Verb ID=Ch)

Table 43. Verb-Get Processing Coefficient (Verb ID=Ch)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:16]	Payload Bit [15:0]
CAd=X	Node ID=20h	Verb ID=Ch	0's

Codec Response Format

Response [31:0]
Processing Coefficient [15:0]

Codec Response for NID=20h (Realtek Defined Registers)

Bit	Description
31:16	Reserved. Read as 0's.
15:0	Processing Coefficient.

Codec Response for Other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.10. Verb-Set Processing Coefficient (Verb ID=4h)

Table 44. Verb-Set Processing Coefficient (Verb ID=4h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:16]	Payload Bit [15:0]
CAd=X	Node ID=20h	Verb ID=4h	Coefficient [15:0]

Codec Response Format

Response [31:0]
0's for all nodes

Codec Response for All NID

Bit	Description
31:0	0's.

This verb is used to get gain/attenuation settings from each widget.

Get Command Format

Codec Response Format

'Get' Payload in Command Bit[15:0]

Codec Response for NID=02h (LOUT1 DAC) and 03h (LOUT2 DAC)

Codec Response for NID=08h and 09h (ADCs)

4-Channel High Definition Audio Codec with Embedded Class-D Speaker Amplifier

Codec Response for NID=0Ch, 0Dh and 0Fh (Mixer)

Bit	Description
31:8	0's.
7	Payload[15] is 0 in 'Get Amplifier Gain': 1: Mute, 0:Unmute (Input Amplifier Mute). Payload[15] is 1 in 'Get Amplifier Gain': Read as 0 (No Output Amplifier Mute).
6:0	Payload[15] is 0 in 'Get Amplifier Gain': Read as 0's (No Input Amplifier Gain). Payload[15] is 1 in 'Get Amplifier Gain': Read as 0's (No Output Amplifier Gain).

Codec Response for NID=12h, 19h, 1Ah and 1Bh (DMIC, MIC2, LINE1 and LINE2)

Bit	Description
31:8	0's.
7	Payload[15] is 0 in 'Get Amplifier Gain': Read as 0's (No Input Amplifier Mute). Payload[15] is 1 in 'Get Amplifier Gain': 1: Mute, 0:Unmute (Output Amplifier Mute, default=1).
6:0	Payload[15] is 0 in 'Get Amplifier Gain': Input Amplifier Gain [6:0]. The volume 0dB/10dB/20dB/30dB in 10dB per step (default=0, 0dB). Payload[15] is 1 in 'Get Amplifier Gain': Read as 0 (No Output Amplifier Gain).

Codec Response for NID=14h, 17h and 21h (SPK-OUT, MONO-OUT and HP-OUT)

Bit	Description
31:8	0's.
7	Payload[15] is 0 in 'Get Amplifier Gain': Read as 0's (No Input Amplifier Mute). Payload[15] is 1 in 'Get Amplifier Gain': 1: Mute, 0:Unmute (Output Amplifier Mute, default=1).
6:0	Payload[15] is 0 in 'Get Amplifier Gain': Read as 0's (No Input Amplifier Gain). Payload[15] is 1 in 'Get Amplifier Gain': Read as 0 (No Output Amplifier Gain).

Codec Response for NID=0Bh (Mixer)

Bit	Description
31:8	0's.
7	Payload[15] is 0 in 'Get Amplifier Gain': Input Amplifier Mute. 0: Unmute, 1: Mute (Default for all) Payload[15] is 1 in 'Get Amplifier Gain': Read as 0 (No Output Amplifier Mute).
6:0	Payload[15] is 0 in 'Get Amplifier Gain': Input Amplifier Gain [6:0]. Specifying the volume from -34.5dB~+12dB in 1.5dB step (Default: 17h, 0dB). Payload[15] is 1 in 'Get Amplifier Gain': Read as 0 (No Output Amplifier Gain).

Codec Response for NID=22h and 23h (Mixer)

Bit	Description
31:8	0's.
7	Payload[15] is 0 in 'Get Amplifier Gain': Input Amplifier Mute. 0: Unmute, 1: Mute (Default for all) Payload[15] is 1 in 'Get Amplifier Gain': Read as 0 (No Output Amplifier Mute).
6:0	Payload[15] is 0 in 'Get Amplifier Gain': Read as 0 (No Input Amplifier Gain). Payload[15] is 1 in 'Get Amplifier Gain': Read as 0 (No Output Amplifier Gain).

Codec Response to Other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.12. Verb-Set Amplifier Gain (Verb ID=3h)

This verb is used to set amplifier gain/attenuation in each widget.

Table 46. Verb-Set Amplifier Gain (Verb ID=3h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:16]	Payload Bit [15:0]
CAd=X	Node ID=Xh	Verb ID=3h	'Set' payload [15:0]

Codec Response Format

Response [31:0]
0's for all nodes

'Set' Payload in Command Bit[15:0]

Bit	Description
15	Set Output Amp. 1: Indicates output amplifier gain will be set
14	Set Input Amp. 1: Indicates input amplifier gain will be set
13	Set Left Amp. 1: Indicates left amplifier gain will be set
12	Set Right Amp. 1: Indicates right amplifier gain will be set
11:8	Index Offset (for input amplifiers on Sum widgets and Selector Widgets). 5-bit index offset in connection list is used to select the input gain that will be set on a Sum or a Selector widget. The index is ignored if the node is not a Sum or a Selector widget, or the 'Set Input Amp' bit is not set.
7	Mute. 0: Unmute 1: Mute ($-\infty$ gain)
6:0	Gain[6:0]. A 7-bit step value specifying the amplifier gain

8.13. Verb-Get Converter Format (Verb ID=Ah)

Table 47. Verb-Get Converter Format (Verb ID=Ah)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:16]	Payload Bit [15:0]
CAd=X	Node ID=Xh	Verb ID=Ah	0's

Codec Response Format

Response [31:0]
Bit[15:0] are converter format

Codec Response for NID=02h, 03h and 06h (Output Converters: LOUT1 DAC, LOUT2 DAC, SPDIF-OUT).

Codec Response for NID=08h and 09h (Input Converters: ADCs)

Bit	Description
31:16	Reserved. Read as 0.
15	Stream Type (TYPE). 0: PCM 1: Non-PCM
14	Sample Base Rate (BASE). 0: 48kHz 1: 44.1kHz
13:11	Sample Base Rate Multiple (MULT). 000b: *1 001b: *2 010b: *3 011b: *4 100b~111b: Reserved
10:8	Sample Base Rate Divisor (DIV). 000b: /1 001b: /2 010b: /3 011b: /4 100b: /5 101b: /6 110b: /7 111b: /8 Not supported. Always read as 000b.
7	Reserved. Read as 0.
6:4	Bits per Sample (BITS). 000b: 8 bits 001b: 16 bits 010b: 20 bits 011b: 24 bits 100b: 32 bits 101b~111b: Reserved
3:0	Number of Channels. 0: 1 channel 1: 2 channels 2: 3 channels 15: 16 channels

Table 48. Get Converter Format Support

	BASE	MULT	DIV	BITS	Sample rate
NID=02h (LOUT1 DAC)	0	000b, 001b, 011b	000b	001,010b, 011b	48K, 96K, 192K
	1	000b	000b	001,010b, 011b	44.1K
NID=03h (LOUT2 DAC)	0	000b, 001b, 011b	000b	001,010b, 011b	48K, 96K, 192K
	1	000b	000b	001,010b, 011b	44.1K
NID=06h (SPDIF-OUT)	0	000b, 001b, 011b	000b	001,010b, 011b	48K, 96K, 192K
	1	000b, 001b	000b	001,010b, 011b	44.1K, 88.2K
NID=08h (LINE ADC)	0	000b, 001b, 011b	000b	001,010b, 011b	48K, 96K, 192K
	1	000b	000b	001,010b, 011b	44.1K
NID=09h (MIX ADC)	0	000b, 001b, 011b	000b	001,010b, 011b	48K, 96K, 192K
	1	000b	000b	001,010b, 011b	44.1K

Codec Response for other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.14. Verb-Set Converter Format (Verb ID=2h)

Table 49. Verb-Set Converter Format (Verb ID=2h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:16]	Payload Bit [15:0]
CAd=X	Node ID=Xh	Verb ID=2h	Set format [15:0]

Codec Response Format

Response [31:0]
0's for all nodes

'Set' Payload in Command Bit[15:0]

Bit	Description
31:16	Reserved. Read as 0.
15	Stream Type (TYPE). 0: PCM 1: Non-PCM
14	Sample Base Rate (BASE). 0: 48kHz 1: 44.1kHz
13:11	Sample Base Rate Multiple (MULT). 000b: *1 001b: *2 010b: *3 011b: *4 100b~111b: Reserved
10:8	Sample Base Rate Divisor (DIV). 000b: /1 001b: /2 010b: /3 011b: /4 100b: /5 101b: /6 110b: /7 111b: /8
7	Reserved. Read as 0.
6:4	Bits per Sample (BITS). 000b: 8 bits 001b: 16 bits 010b: 20 bits 011b: 24 bits 100b: 32 bits 101b~111b: Reserved
3:0	Number of Channels. 0: 1 channel 1: 2 channels 2: 3 channels 15: 16 channels

8.15. Verb-Get Power State (Verb ID=F05h)

The ALC233-VB is designed to meet Intel's low-power-state white paper and is ECR HDA-015B compliant (see section 7.5 Power Management , page 27).

Table 50. Verb-Get Power State (Verb ID=F05h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID= F05h	0's

Codec Response Format

Response [31:0]
Power State [7:0]

Codec Response for NID=01h (Audio Function Group)

Codec Response for NID=02h, 03h, 08h and 09h (DAC and ADC)

Codec Response for NID=12h, 14h, 17h, 18h, 19h, 1Ah, 1Bh, 1Dh, 1Eh and 21h (Pin Widgets)

Codec Response for NID=06h (Digital Converter)

Bit	Description
31:11	Reserved. Read as 0s.
10	<p>PS-Settings Reset</p> <p>0: Settings of widgets has been reset during any low power state.</p> <p>1: Settings changed from the defaults have been reset to their default during any low power state.</p> <p>Read as 1 after single-function-reset in D0/D1/D2/D3/D3Cold.</p> <p>Read as 1 after link-reset in D0/D1/D2/D3/D3Cold.</p> <p>Read as 1 after double-function-reset in D0/D1/D2/D3/D3Cold.</p> <p>The PS-Settings Reset bit will be cleared to zero after Get-Power-State-verb's response.</p>
9	<p>PS-ClkStopOk</p> <p>0: No capability to operate normally with BITCLK stop</p> <p>1: Operate normally with no BICLK</p> <p>Read as 1 when PS-Set, Set Power State [1:0]=011b/111b.</p> <p>Read as 0 when PS-Set, Set Power State [1:0]=000b/001b/010b.</p>
8	<p>PS-Error</p> <p>Not supported in ALC233-VB</p>
7	Reserved, read as 0s.
6:4	<p>PS-Act. Actual Power State [3:0].</p> <p>000: Power state is D0 001: Power state is D1 010: Power state is D2 011: Power state is D3</p> <p>100: Power state is D3Cold</p> <p>PS-Act indicates the actual power state of the referenced node. For Audio Function Group nodes (NID=01h), PS-Act is always equal to PS-Set.</p> <p>D0: Fully on</p> <p>D1: The lowest possible power consuming state that can return to fully on state (D0) within 10msec, except when analog pass through is fully on (Mixer on)</p> <p>D2: The lowest possible power consuming state that can return to fully on state (D0) within 10msec.</p> <p>D3: The lowest possible power consuming state under software control.</p> <p>D3Cold: The codec will no longer respond to further commands and power can be removed from the codec.</p>
3	Reserved, read as 0s.
2:0	<p>PS-Set, Set Power State [2:0].</p> <p>000: Power state is D0 001: Power state is D1 010: Power state is D2 011: Power state is D3</p> <p>100: Power state is D3Cold</p> <p>PS-Set controls the current power setting of the referenced node.</p>

Note 1: Specific blocks will be powered down in each power state.

Note 2: D3Cold only supported for function group.

Codec Response for other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.16. Verb-Set Power State (Verb ID=705h)

Table 51. Verb-Set Power State (Verb ID=705h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=705h	Power State [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

'Power State' in Command Bit[7:0]

Bit	Description
7	Reserved. Read as 0.
6:4	PS-Act. Actual Power State [1:0]. 000: Power state is D0 001: Power state is D1 010: Power state is D2 011: Power state is D3 100: Power state is D3Cold PS-Act indicates the actual power state of the referenced node.
3	Reserved. Read as 0.
2:0	PS-Set. Set Power State [1:0]. 000: Power state is D0 001: Power state is D1 010: Power state is D2 011: Power state is D3 100: Power state is D3Cold

8.17. Verb-Get Converter Stream, Channel (Verb ID=F06h)

Table 52. Verb-Get Converter Stream, Channel (Verb ID=F06h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=F06h	0's

Codec Response Format

Response [31:0]
Stream & Channel [7:0]

Codec Response for NID=02h, 03h and 06h (Output Converters: LOUT1, LOUT2 DAC and SPDIF-OUT)

Codec Response for NID=08h and 09h (Input Converters: LINE and MIX ADC)

Bit	Description
31:8	Reserved. Read as 0's.
7:4	Stream[3:0]. The link stream used by the converter. 0000b is unused, 0001b is stream 1, etc.
3:0	Channel[3:0]. The lowest channel used by the converter. A stereo converter will use the set channel n as well as n+1 for its left and right channel.

Codec Response for other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.18. Verb-Set Converter Stream, Channel (Verb ID=706h)

Table 53. Verb-Set Converter Stream, Channel (Verb ID=706h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=706h	Stream & Channel [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

'Stream and Channel' in Command Bit[7:0]

Bit	Description
31:8	Reserved. Read as 0's.
7:4	Set Stream[3:0]. The link stream used by the converter. 0000b is stream 0, 0001b is stream 1, etc.
1:0	Set Channel[3:0]. The lowest channel used by the converter. A stereo converter will use the set channel n as well as n+1 for its left and right channel.

8.19. Verb-Get Pin Widget Control (Verb ID=F07h)

Table 54. Verb-Get Pin Widget Control (Verb ID=F07h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=F07h	0's

Codec Response Format

Response [31:0]
Pin Control [7:0]

Codec Response for NID= 12h, 14h, 17h, 18h, 19h, 1Ah, 1Bh, 1Dh, 1Eh, 21h (Pin Complex)

Bit	Description
31:8	Reserved. Read as 0's.
7	H-Phn Enable. 0: Disabled 1: Enabled
6	Out Enable (Output Buffer Enable, EN_OBUF for an I/O unit). 0: Disabled 1: Enabled
5	In Enable (Input Buffer Enable, EN_IBUF for an I/O unit). 0: Disabled 1: Enabled
4:3	Reserved.
2:0	VrefEn (Vrefout Enable Control). 000b: Hi-Z (Disabled, default for all) 001b: 50% of AVDD (ALC233-VB supports 2.5V reference output when AVDD is 5V) 010b: Ground 0V 011b: Reserved 100b: 80% of AVDD (ALC233-VB supports 3.2V reference output when AVDD is 5V) 101b: 100% of AVDD 110b~111b: Reserved

Codec Response for other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.20. Verb-Set Pin Widget Control (Verb ID=707h)

Table 55. Verb-Set Pin Widget Control (Verb ID=707h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=707h	Pin Control [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

Codec Response for NID= 12h, 14h, 17h, 18h, 19h, 1Ah, 1Bh, 1Dh, 1Eh, 21h (Pin Complex)

Bit	Description
31:8	Reserved. Read as 0's.
7	H-Phn Enable. 0: Disabled 1: Enabled
6	Out Enable (Output Buffet Enable, EN_OBUF for an I/O unit). 0: Disabled 1: Enabled
5	In Enable (Input Buffer Enable, EN_IBUF for an I/O unit). 0: Disabled 1: Enabled
4:3	Reserved.
2:0	VrefEn (Vrefout Enable Control). 000b: Hi-Z (Disabled, default for all) 001b: 50% of AVDD 010b: Ground 0V 011b: Reserved 100b: 80% of AVDD 101b: 100% of AVDD 110b~111b: Reserved <i>Note: Only NID=18h, 19h, 1Ah and 1Bh support reference output, other nodes will ignore this verb and respond with 0.</i>

Determines whether a widget is enabled to send an unsolicited response. An HDA codec can use an unsolicited response to inform software of a real-time event.

Get Command Format

Codec Response Format

Codec Response for NID=01h (GPIO), 14h, 19h, 1Ah, 1Bh, 1Eh and 21h (SPK-OUT, MIC2, LINE1, LINE2, SPDIF-OUT, HP-OUT)

Codec Response for other NID

8.22. Verb-Set Unsolicited Response Control (Verb ID=708h)

Enable a widget to generate an unsolicited response.

Set Command Format

Codec Response Format

‘EnableUnsol’ in Command Bit [7:0]

4-Channel High Definition Audio Codec with Embedded Class-D Speaker Amplifier

8.23. Verb-Get Pin Sense (Verb ID=F09h)

Returns the Presence Detect status and the impedance of a device attached to the pin.

Table 58. Verb-Get Pin Sense (Verb ID=F09h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID= F09h	0's

Codec Response Format

Response [31:0]
32-bit Response

Codec Response for NID=14h, 19h, 1Ah, 1Bh, 1Eh and 21h (SPK-OUT, MIC2, LINE1, LINE2, SPDIF-OUT, HP-OUT)

Bit	Description
31	Presence Detect Status. 0: No device is attached to the pin 1: Device is attached to the pin
30:0	Measured Impedance. The ALC233-VB does not support hardware impedance detect. This field is read as 0s.

Codec Response for other NID

Bit	Description
31:0	Not Supported (returns 00000000h).

8.24. Verb-Execute Pin Sense (Verb ID=709h)

Table 59. Verb-Execute Pin Sense (Verb ID=709h)

Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID= 709h	Right Channel[0]

Codec Response Format

Response [31:0]
0's for all nodes

'Payload' in Command Bit[7:0]

Bit	Description
7:1	Reserved. Read as 0's.
0	Right (Ring) Channel Select. 0: Sense Left Channel (Tip) 1: Sense Right Channel (Ring) The ALC233-VB does not support hardware impedance detect and will ignore this control bit.

8.25. Verb-Get Configuration Default (Verb ID=F1Ch/F1Dh/F1Eh/F1Fh)

Read the 32-bit sticky register for each Pin Widget configured by software.

Table 60. Verb-Get Configuration Default (Verb ID=F1Ch/F1Dh/F1Eh/F1Fh)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID= F1Ch	0's

Codec Response Format

Response [31:0]
32-bit Response

Codec Response for NID=12h, 14h, 17h, 19h, 1Ah, 1Bh, 1Dh, 1Eh and 21h (DMIC, SPK-OUT, MONO, MIC2, LINE1, LINE2, PCBEEP, HP-OUT, SPDIF-OUT)

Bit	Description
31:0	32-bit configuration information for each pin widget.

Note: The 32-bit registers for each Pin Widget are sticky and will not be reset by a LINK Reset or Codec Reset (Function Reset Verb).

8.26. Verb-Set Configuration Default Bytes 0, 1, 2, 3 (Verb ID=71Ch/71Dh/71Eh/71Fh)

The BIOS can use this verb to figure out the default conditions (e.g., placement and expected default device).

Table 61. Verb-Set Configuration Default Bytes 0, 1, 2, 3 (Verb ID=71Ch/71Dh/71Eh/71Fh)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=71Ch, 71Dh, 71Eh, 71Fh	Label [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

Note: Supported by Pin Widget NID=12h, 14h, 17h, 18h, 19h, 1Ah, 1Bh, 1Dh, 1Eh and 21h. Other widgets will ignore this verb.

Codec Response for All NID

Bit	Description
31:0	0's.

8.27. Verb-Get BEEP Generator (Verb ID=F0Ah)

Table 62. Verb-Get BEEP Generator (Verb ID= F0Ah)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID= F0Ah	0's

Codec Response Format

Response [31:0]
Divider [7:0]

‘Response’ for NID=01h

Bit	Description
31:8	Reserved.
7:0	Frequency Divider, F[7:0]. The internal BEEP frequency is the result of dividing the 48kHz clock by 4 times the number specified in F[7:0]. The lowest tone is 48kHz/(255*4)=47Hz. The highest tone is 48kHz/(1*4)=12kHz. A value of 00h in F[7:0] disables the internal BEEP generator and allows external PCBEEP input.

Codec Response for Other NID

Bit	Description
31:0	0's.

8.28. Verb-Set BEEP Generator (Verb ID=70Ah)

Table 63. Verb-Set BEEP Generator (Verb ID= 70Ah)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=70Ah	Divider [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

‘Divider’ in Set Command

Bit	Description
31:8	Reserved.
7:0	Frequency Divider, F[7:0]. The internal BEEP frequency is the result of dividing the 48kHz clock by 4 times the number specified in F[7:0]. The lowest tone is 48kHz/(255*4)=47Hz. The highest tone is 48kHz/(1*4)=12kHz. A value of 00h in F[7:0] disables the internal BEEP generator and allows external PCBEEP input.

Note: All nodes except BEEP generator (NID=01h) will ignore this verb.

Codec Response for All NID

Bit	Description
31:0	0's.

8.29. Verb-Get GPIO Data (Verb ID= F15h)

Table 64. Verb-Get GPIO Data (Verb ID= F15h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=F15h	0's

Codec Response Format

Response [31:0]
32-bit Response

Codec Response for NID=01h (Audio Function Group)

Bit	Description
31:8	Reserved.
7:3	Reserved.
2:0	GPIO[2:0] Data. The value written (output) or sensed (input) on the corresponding pin if it is enabled.

Codec Response for Other NID

Bit	Description
31:0	0's.

8.30. Verb-Set GPIO Data (Verb ID= 715h)

Table 65. Verb-Set GPIO Data (Verb ID= 715h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=715h	Data [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

'Data' in Set command for NID=01h (Audio Function Group)

Bit	Description
31:8	Reserved.
7:3	Reserved.
2:0	GPIO[2:0] Output Data. The value written determines the value driven on a pin that is configured as an output pin.

Codec Response for All NID

Bit	Description
31:0	0's.

8.31. Verb-Get GPIO Enable Mask (Verb ID=F16h)

Table 66. Verb-Get GPIO Enable Mask (Verb ID= F16h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=F16h	0's

Codec Response Format

Response [31:0]
EnableMask [7:0]

Codec Response for NID=01h (Audio Function Group)

Bit	Description
31:8	Reserved.
7:3	Reserved.
2:0	GPIO[2:0] Enable Mask. 0: The corresponding GPIO pin is disabled and is in Hi-Z state 1: The corresponding GPIO pin is enabled. Its behavior is determined by the GPIO direction control

Note: All nodes except Audio Function Group (NID=01h) will ignore this verb.

Codec Response for Other NID

Bit	Description
31:0	0's.

8.32. Verb-Set GPIO Enable Mask (Verb ID=716h)

Table 67. Verb-Set GPIO Enable Mask (Verb ID=716h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=716h	Enable Mask [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

Codec Response for NID=01h (Audio Function Group)

Bit	Description
31:8	Reserved.
7:3	Reserved.
2:0	GPIO[2:0] Enable Mask. 0: The corresponding GPIO pin is disabled and is in Hi-Z state 1: The corresponding GPIO pin is enabled. Its behavior is determined by the GPIO direction control

Note: All nodes except Audio Function Group (NID=01h) will ignore this verb.

Codec Response for All NID

Bit	Description
31:0	0's.

8.33. Verb-Get GPIO Direction (Verb ID=F17h)

Table 68. Verb-Get GPIO Direction (Verb ID=F17h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=F17h	0's

Codec Response Format

Response [31:0]
Direction [7:0]

Codec Response for NID=01h (Audio Function Group)

Bit	Description
31:8	Reserved.
7:3	Reserved.
2:0	GPIO[2:0] Direction Control. 0: The corresponding GPIO pin is configured as an input 1: The corresponding GPIO pin is configured as an output

Note: All nodes except Audio Function Group (NID=01h) will ignore this verb.

Codec Response for Other NID

Bit	Description
31:0	0's.

8.34. Verb-Set GPIO Direction (Verb ID=717h)

Table 69. Verb-Set GPIO Direction (Verb ID=717h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=717h	Direction [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

Codec Response for NID=01h (Audio Function Group)

Bit	Description
31:8	Reserved.
7:3	Reserved.
2:0	GPIO[2:0] Direction Control. 0: The corresponding GPIO pin is configured as an input 1: The corresponding GPIO pin is configured as an output

Note: All nodes except Audio Function Group (NID=01h) will ignore this verb.

Codec Response for Other NID

Bit	Description
31:0	0's.

8.35. Verb-Get GPIO Unsolicited Response Enable Mask (Verb ID=F19h)

Table 70. Verb-Get GPIO Unsolicited Response Enable Mask (Verb ID=F19h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=F19h	0's

Codec Response Format

Response [31:0]
UnsolEnable [7:0]

Codec Response for NID=01h (Audio Function Group)

Bit	Description
31:8	Reserved.
7:3	Reserved.
2:0	GPIO[2:0] Unsolicited Enable Mask. 0: Unsolicited response will not be sent on link 1: Unsolicited response will be sent on link when state of corresponding GPIO has been changed

Note: All nodes except Audio Function Group (NID=01h) will ignore this verb.

Codec Response for Other NID

Bit	Description
31:0	0's.

8.36. Verb-Set GPIO Unsolicited Response Enable Mask (Verb ID=719h)

Table 71. Verb-Set GPIO Unsolicited Response Enable Mask (Verb ID=719h)

Set Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=719h	UnsolEnable [7:0]

Codec Response Format

Response [31:0]
0's for all nodes

Codec Response for NID=01h (Audio Function Group)

Bit	Description
31:8	Reserved.
7:3	Reserved.
2:0	GPIO[2:0] Unsolicited Enable Mask. 0: Unsolicited response will not be sent on link 1: Unsolicited response will be sent on link when state of corresponding GPIO has been changed

Note 1: All nodes except the Audio Function Group (NID=01h) will ignore this verb.

Note 2: The unsolicited response of corresponding GPIO is enabled when it's 'Enable Mask' and Verb- 'Unsolicited Response' for NID=01h are enabled.

Codec Response for Other NID

Bit	Description
31:0	0's.

8.37. Verb-Get Digital Converter Control 1 & Control 2 & Control 3 & Control 4 (Verb ID= F0Dh, F0Eh, F3Eh, F3Fh)

Table 72. Verb-Get Digital Converter Control 1 & Control 2 (Verb ID= F0Dh, F0Eh)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=06h	Verb ID=F0Dh/ F0Eh/F3Eh/F3Fh	0's

Codec Response Format

Response [31:0]
Bit[31:16]=0's, Bit[15:0] are SIC bit

NID=06h (SPDIF-OUT Converter) Response to 'Get verb'-F0Dh/F0Eh/F3Eh/F3Fh (Control for SIC bit[15:0])

Bit	Description- SIC (SPDIF IEC Control) Bit[7:0]
31:24	Read as 0's.
23	Keep Alive Enable 0: Disable, SPDIF output is disabled in D2/D3 mode 1: Enable, SPDIF output is enabled in D2/D3 mode
22:20	Reserved. Read as 0's
19:16	IEC Coding Type Not supported in ALC233-VB, read as 0's.
14:8	CC[6:0] (Category Code).
7	LEVEL (Generation Level).
6	PRO (Professional or Consumer Format). 0: Consumer format 1: Professional format
5	/AUDIO (Non-Audio Data Type). 0: PCM data 1: AC3 or other digital non-audio data
4	COPY (Copyright). 0: Asserted 1: Not asserted
3	PRE (Pre-Emphasis). 0: None 1: Filter pre-emphasis is 50/15 microseconds
2	VCFG for Validity Control (control V bit and data in Sub-Frame).
1	V for Validity Control (control V bit and data in Sub-Frame).
0	Digital Enable. DigEn. 0: OFF 1: ON

Codec Response for Other NID

Bit	Description
31:0	0's

8.38. Verb-Set Digital Converter Control 1 & Control 2 & Control 3 & Control 4 (Verb ID=70Dh, 70Eh, 73Eh, 73Fh)-

Table 73. Verb-Set Digital Converter Control 1 & Control 2 (Verb ID=70Dh, 70Eh)

Set Command Format (Verb ID=70Dh, Set Control 1)

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=06h	Verb ID=70Dh	SIC [7:0]

Codec Response Format

Response [31:0]
0's

Set Command Format (Verb ID=70Eh, Set Control 2)

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=06h	Verb ID=70Eh	SIC [15:8]

Codec Response Format

Response [31:0]
0's

Set Command Format (Verb ID=73Eh, Set Control 3)

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=73Eh	SIC [23:16]

Codec Response Format

Response [31:0]
0's

Set Command Format (Verb ID=73Fh, Set Control 4)

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=Xh	Verb ID=73Fh	SIC [31:24]

Codec Response Format

Response [31:0]
0's

'Payload' in Set Control 1 for NID=06h (SPDIF-OUT Converter)

Bit	Description- SIC (SPDIF IEC Control) Bit[7:0]
7	LEVEL (Generation Level)
6	PRO (Professional or Consumer Format). 0: Consumer format 1: Professional format
5	/AUDIO (Non-Audio Data Type). 0: PCM data 1: AC3 or other digital non-audio data
4	COPY (Copyright). 0: Asserted 1: Not asserted
3	PRE (Pre-Emphasis). 0: None 1: Filter pre-emphasis is 50/15 microseconds
2	VCFG for Validity Control (control V bit and data in Sub-Frame).
1	V for Validity Control (control V bit and data in Sub-Frame).
0	Digital Enable. DigEn. 0: OFF 1: ON

‘Payload’ in Set Control 2 for NID=06h (SPDIF-OUT Converter)

Bit	Description- SIC (SPDIF IEC Control) Bit[7:0]
7	Reserved. Read as 0's.
6:0	CC[6:0] (Category Code).

‘Payload’ in Set Control 3 for NID=06h (SPDIF-OUT)

Bit	Description- SIC (SPDIF IEC Control) Bit[23:16]
7	Keep Alive Enable 0: Disable, SPDIF output is disabled in D2/D3 mode 1: Enable, SPDIF output is enabled in D2/D3 mode
6:0	Reserved

‘Payload’ in Set Control 4 for NID=06h (SPDIF-OUT)

Bit	Description- SIC (SPDIF IEC Control) Bit[31:24]
7:0	Reserved

8.39. Verb-Get Subsystem ID [31:0] (Verb ID=F20h/F21h/D22h/F23h)

32-bit Read/Write register for Audio Function Group (NID=01h)

Table 74. Verb-Get Subsystem ID [31:0] (Verb ID=F20h/F21h/F22h/F23h)

Get Command Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd = X	Node ID=01h	Verb ID=F20h	0s

Codec Response Format

Response [31:0]
32-bit Response

Codec Response for NID=01h

Bit	Description
31:16	Subsystem ID[23:8] (Default=10ECh).
15:8	Subsystem ID[7:0] (Default=02h).
7:0	Assembly ID[7:0] (Default=35h).

8.40. Verb-Set Subsystem ID [31:0] (Verb ID=723h/722h/ 721h/720h for [31:24]/[23:16]/[15:8]/[7:0])

Table 75. Verb-Set Subsystem ID [31:0] (Verb ID=723h/722h/721h/720h for [31:24]/[23:16]/[15:8]/[7:0])

Set Command Format

Codec Response Format

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]	Response [31:0]
CAd = X	Node ID=01h	Verb ID=723h, 722h, 721h, 720h	Label [7:0]	0s for all nodes

Codec Response for all NID

Bit	Description
31:0	0s.

8.41. Verb-Get/Set EAPD Control (Verb ID=F0Ch for Get, 70Ch for Set)

Table 76. Verb-Get EAPD Control (Verb ID=F0Ch)

Get Command Format (NID=14h)

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=14h	Verb ID=F0Ch	0s

Codec Response Format

Response [31:0]
Bit[1] is EAPD Control

Codec Response for NID=14h (SPK-OUT, port-D)

Bit	Description
31:3	Reserved.
2	L-R Swap. The ALC233-VB does not support swapping left and right channels. Read as 0.
1	EAPD Value. 0: EAPD pin state is low 1: EAPD pin state is high
0	BTL Enable. The ALC233-VB does not support BTL output. Read as 0.

Codec Response for Other NID

Bit	Description
31:0	0's.

Table 77. Verb-Set EAPD Control (Verb ID=70Ch)

Set Command Format (NID=14h)

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=14h	Verb ID=70Ch	Bit[1] is EAPD Control

Codec Response Format

Response [31:0]
0s

Payload in Set command for NID=14h (SPK-OUT, port-D)

Bit	Description
31:3	Reserved.
2	L-R Swap. The ALC233-VB does not support swapping left and right channels. Read as 0.
1	EAPD Value. 0: EAPD pin state is low 1: EAPD pin state is high. <i>Note: Only one physical logic for the EAPD signal.</i>
0	BTL Enable. The ALC233-VB does not support BTL output. Read as 0.

Codec Response

Bit	Description
31:0	0's.

8.42. Verb-Function Reset (Verb ID=7FFh)

Table 78. Verb-Function Reset (Verb ID=7FFh)

Command Format (NID=01h)

Bit [31:28]	Bit [27:20]	Bit [19:8]	Payload Bit [7:0]
CAd=X	Node ID=01h	Verb ID=7FFh	0's

Codec Response Format

Response [31:0]
0's

Codec Response

Bit	Description
31:0	Reserved. Read as 0's.

Note: The Function Reset command causes all widgets to return to their power-on default state.

9. Electrical Characteristics

9.1. DC Characteristics

9.1.1. Absolute Maximum Ratings

Table 79. Absolute Maximum Ratings

Parameter	Symbol	Minimum	Typical	Maximum	Units
Power Supplies					
Digital Power for Core	DVDD	3.0	3.3	3.6	V
Digital Power for Link*1	DVDD-IO	1.5	3.3	3.6	V
Analog Power for IO	AVDD1	4.75	5.0	5.25	V
Analog Power for core	AVDD2	1.425	1.5	1.89	V
Capless Amplifier Power	CPVDD	3.0	3.3	3.6	V
BTL Analog Power	PVDD1, PVDD2	4.75	5	5.25	V
Ambient Operating Temperature	Ta	0	-	+70	°C
Storage Temperature	Ts	-	-	+125	°C
ESD (Electrostatic Discharge)					
	Susceptibility Voltage				
All Pins	Pass 3500V				

Note: When the Class-D amplifier is operating, surges of PVDD > 7V duration for 0.1ms may damage the amplifier. To suppress such surges, 10μF tantalum capacitors are required at PVDD1 and PVDD2.

9.1.2. Threshold Voltage

DVDD=3.3V±5%, T_{ambient}=25°C, with 50pF external load.

Table 80. Threshold Voltage

Parameter	Symbol	Minimum	Typical	Maximum	Units
Input Voltage Range	V _{in}	-0.30	-	DVDD+0.30	V
Low Level Input Voltage (BCLK, RST#, SDO, SYNC, SDI)	V _{IL}	-	-	0.4*D _{VDD-IO}	V
High Level Input Voltage (BCLK, RST#, SDO, SYNC, SDI)	V _{IH}	0.6*D _{VDD-IO}	-	-	V
Low Level Output Voltage (SDI)	V _{OL}	-	-	0.1*D _{VDD-IO}	V
High Level Output Voltage (SDI)	V _{OH}	0.9*D _{VDD-IO}	-	-	V
Low Level Input Voltage (SPDIF-OUT, DMIC, GPIOs)	V _{IL}	-	0.5*D _{VDD}	-	V
High Level Input Voltage (SPDIF-OUT, DMIC, GPIOs)	V _{IH}	-	0.5*D _{VDD}	-	V
Low Level Output Voltage (SPDIF-OUT, DMIC, GPIOs)	V _{OL}	-	-	0.1*D _{VDD}	V
High Level Output Voltage (SPDIF-OUT, DMIC, GPIOs)	V _{OH}	0.9*D _{VDD}	-	-	V
Input Leakage Current	-	-10	-	10	μA
Output Leakage Current (Hi-Z)	-	-10	-	10	μA
Output Buffer Drive Current	-	-	5	-	mA
Internal Pull Up/Down Resistance	-	-	47k	-	Ω

9.1.3. SPDIF Output Characteristics

DVDD= 3.3V, T_{ambient}=25°C, with 75Ω external load.

Table 81. SPDIF Output Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Units
SPDIF-OUT High Level Output	V _{OH}	3.0	3.3	-	V
SPDIF-OUT Low Level Output	V _{OL}	-	0	0.3	V

9.1.4. Digital Filter Characteristics

Table 82. Digital Filter Characteristics

Filter	Symbol	Minimum	Typical	Maximum	Units
ADC Lowpass Filter	Passband	0	-	$0.4 \cdot F_s$	kHz
	Stopband	$0.6 \cdot F_s$	-	-	kHz
	Stopband Rejection	-	-90.0	-	dB
	Passband Frequency Response	-	± 0.002	-	dB
DAC Lowpass Filter	Passband	0	-	$0.4 \cdot F_s$	kHz
	Stopband	$0.6 \cdot F_s$	-	-	kHz
	Stopband Rejection	-	-90	-	dB
	Passband Frequency Response	-	± 0.005	-	dB


Note: F_s =Sample rate.

9.2. AC Characteristics

9.2.1. Link Reset and Initialization Timing

Table 83. Link Reset and Initialization Timing

Parameter	Symbol	Minimum	Typical	Maximum	Units
RESET# Active Low Pulse Width	T_{RST}	100.167	-	-	μs
RESET# Inactive to BCLK Startup Delay for PLL Ready Time	T_{PLL}	100	-	-	μs
SDI Initialization Request	T_{FRAME}	-	-	25	Frame Time

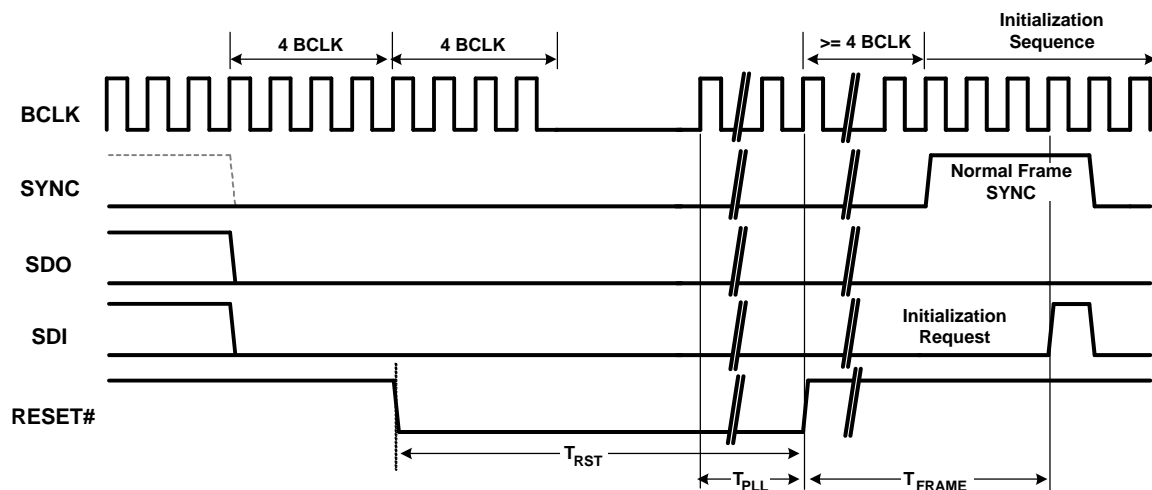
Figure 17. Link Reset and Initialization Timing

9.2.2. Link Timing Parameters at the Codec

Table 84. Link Timing Parameters at the Codec

Parameter	Symbol	Minimum	Typical	Maximum	Units
BCLK Frequency	-	23.9976	24.0	24.0024	MHz
BCLK Period	T_{cycle}	41.163	41.67	42.171	ns
BCLK Jitter	T_{jitter}	-	150	500	ps
BCLK High Pulse Width	T_{high}	17.5 (42%)	-	24.16 (58%)	ns (%)
BCLK Low Pulse Width	T_{low}	17.5 (42%)	-	24.16 (58%)	ns (%)
SDO Setup Time at Both Rising and Falling Edge of BCLK	T_{setup}	5	-	-	ns
SDO Hold Time at Both Rising and Falling Edge of BCLK	T_{hold}	5	-	-	ns
SDI Valid Time After Rising Edge of BCLK (1: 50pF external load)	T_{tco}	3	-	11	ns
SDI Flight Time	T_{flight}	0	-	7	ns

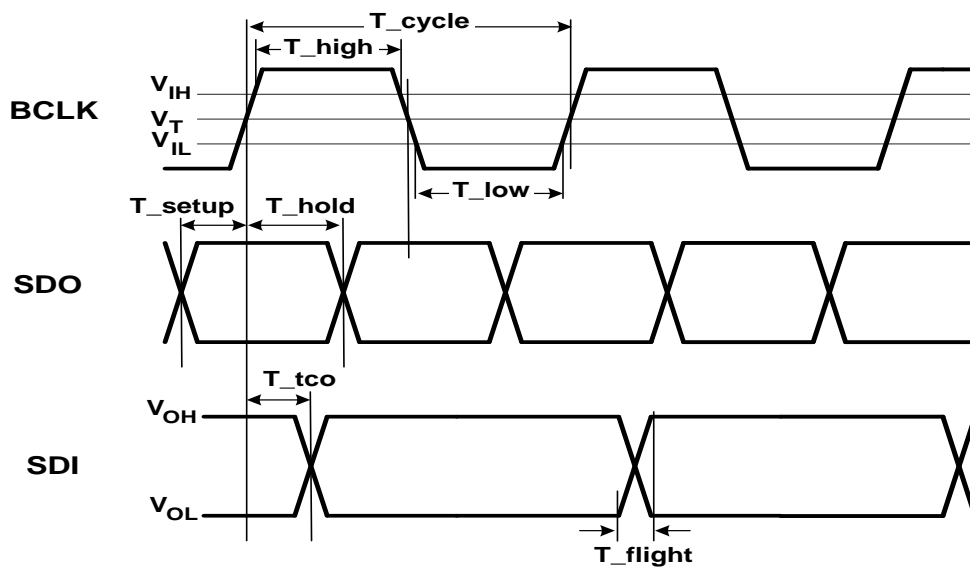


Figure 18. Link Signal Timing

9.2.3. SPDIF Output Timing

Table 85. SPDIF Output Timing

Parameter	Symbol	Minimum	Typical	Maximum	Units
SPDIF-OUT Frequency	-	-	3.072	-	MHz
SPDIF-OUT Period	T_{cycle}	-	325.6	-	ns
SPDIF-OUT Jitter	T_{jitter}	-	-	4	ns
SPDIF-OUT High Level Width	T_{High}	156.2 (48%)	162.8 (50%)	169.2 (52%)	ns (%)
SPDIF-OUT Low Level Width	T_{Low}	156.2 (48%)	162.8 (50%)	169.2 (52%)	ns (%)
SPDIF-OUT Rising Time	T_{rise}	-	2.0	-	ns
SPDIF-OUT Falling Time	T_{fall}	-	2.0	-	ns

Note: These are bit parameters for 48kHz sample rate of SPDIF-OUT.

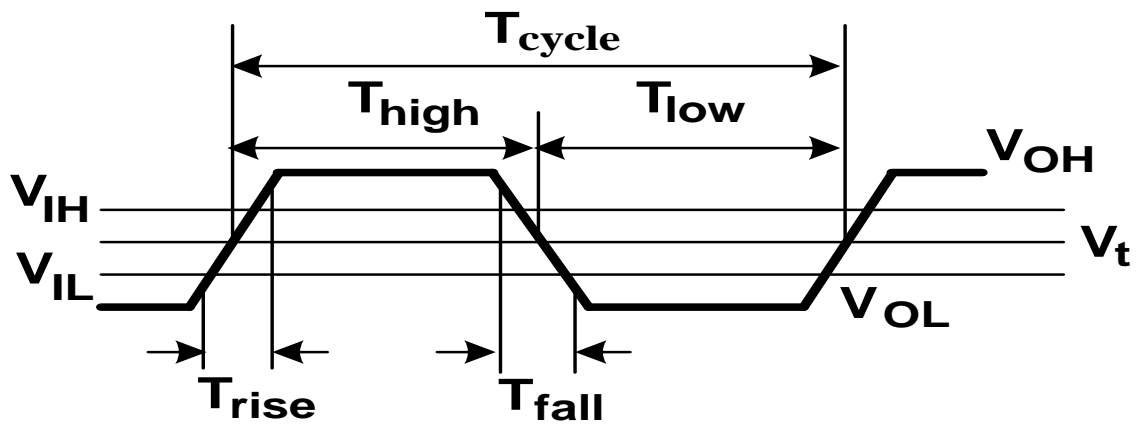


Figure 19. Output Timing

9.3. Analog Performance

- Standard Test Conditions
- $T_{\text{ambient}}=25^{\circ}\text{C}$, DVDD=3.3V $\pm 5\%$, AVDD1=5.0V $\pm 5\%$, AVDD2=1.5V $\pm 5\%$
 - 1kHz input sine wave; Sampling frequency=48kHz; 0dB=1Vrms
 - 10K Ω /50pF load; Test bench Characterization BW: 20Hz~22kHz

Table 86. Analog Performance

Parameter	Min	Typ	Max	Units
Full-Scale Input Voltage All ADC (Gain=0dB)	-	1.35	-	Vrms
Full-Scale Output Voltage All DAC (Gain=0dB)	-	1.35	-	Vrms
SNR (A Weighted)				
ADC	-	90	-	dB FSA
DAC	-	97	-	dB FSA
Headphone Out @32 Ω Load	-	95	-	dB FSA
Total Harmonic Distortion Plus Noise, THD+N				
ADC	-	-85	-	dB FS
DAC	-	-85	-	dB FS
Headphone Out @32 Ω Load	-	-70	-	dB FS
Frequency Response				
ADC (-3dB lower edge, -1dB higher edge)	10	-	0.454*Fs	Hz
DAC (-3dB lower edge, -1dB higher edge)	10	-	0.454*Fs	Hz
Power Supply Rejection Ratio	-	-60	-	dB
Total Out-of-Band Noise (28.8kHz~100kHz)	-	-60	-	dB
Amplifier Gain Step				
ADC	-	0.75	-	dB
DAC	-	0.75	-	dB
Crosstalk	-	-80	-	dB
Input Impedance (Gain=0dB)	-	27	-	K Ω
Output Impedance				
Amplified Output	-	1	-	Ω
Non-Amplified Output	-	200	-	Ω
VREFOUTx Output Voltage	0	2.50	4.0	V
VREFOUTx Output Current	-	5	-	mA
Power consumption @ D0 (*1)	-	-	45	mW
Power consumption @ D3Hot, HD-A Link Alive	-	1.2	-	mW
Power consumption @ D3Hot, HD-A Link Stops	-	1	-	mW

Note: FSA=Full-Scale with A-weighting filter.

FS=Full-Scale.

Note: (*1) AVDD2 condition is 1.5V and only DAC to Headphone out @32ohm 1mW output power.

9.4. Class-D Power Amplifier Performance

Table 87. Class-D Power Amplifier Performance


Parameter	Min	Typ	Max	Units
Maximum Output Peak Current @ BTL Mode per channel	-	1.05	-	A
Maximum Output Power (THD+N=1%, 4ohms +33uH Load, PVDD=5V) per channel	-	2.2	-	W
Maximum Output Power (THD+N=1%, 8ohms +33uH Load, PVDD=5V) per channel	-	1.1	-	W
Power Efficiency η @ BTL Mode into 8ohms+33uH per channel	-	85	-	%
Power Efficiency η @ BTL Mode into 4ohms +33uH per channel	-	80	-	%
Full-Scale Output Voltage @ BTL Mode PCM/PDM Converter per channel	-	+/-4.2	-	Vpeak
S/N (A weighted) @ BTL Mode PCM/PDM Converter per channel	-	92	-	dB FSA
THD+N (AES-17)@ BTL Mode at test signal -3dBFS around 20Hz~22KHz PCM/PDM Converter per channel	-	-75	-	dB FS
Frequency Response @ BTL Mode PCM/PDM Converter per channel	20	-	22K	Hz
Total Quiescent Current (Iq)	-	8	-	mA
Minimum Pulse Width	-	163	-	nS
MQFN-48 Package Thermal Characteristic, Θ_{Ja}	-	30	-	°C/W
Output Voltage Noise(Vn) at Mute Condition	-	20	-	μ V
Output Short Circuit Protection Limit	-	2.5	-	A
Class-D Output RMS Current per channel, I_L (BTL 4 ohms +33uH Load, PVDD = 5.0V, Full Power Output)	-	0.74	-	A
Class-D Output RMS Current per channel, I_L (BTL 4 ohms +33uH Load, PVDD = 5.0V, Power Down)	-	0.2	-	μ A

Note: If output power is <1W with 4ohm loading, please contact Realtek FAE.

10. Application Circuits

Please contact Realtek for up-to-date application circuit information.

11. Mechanical Dimensions

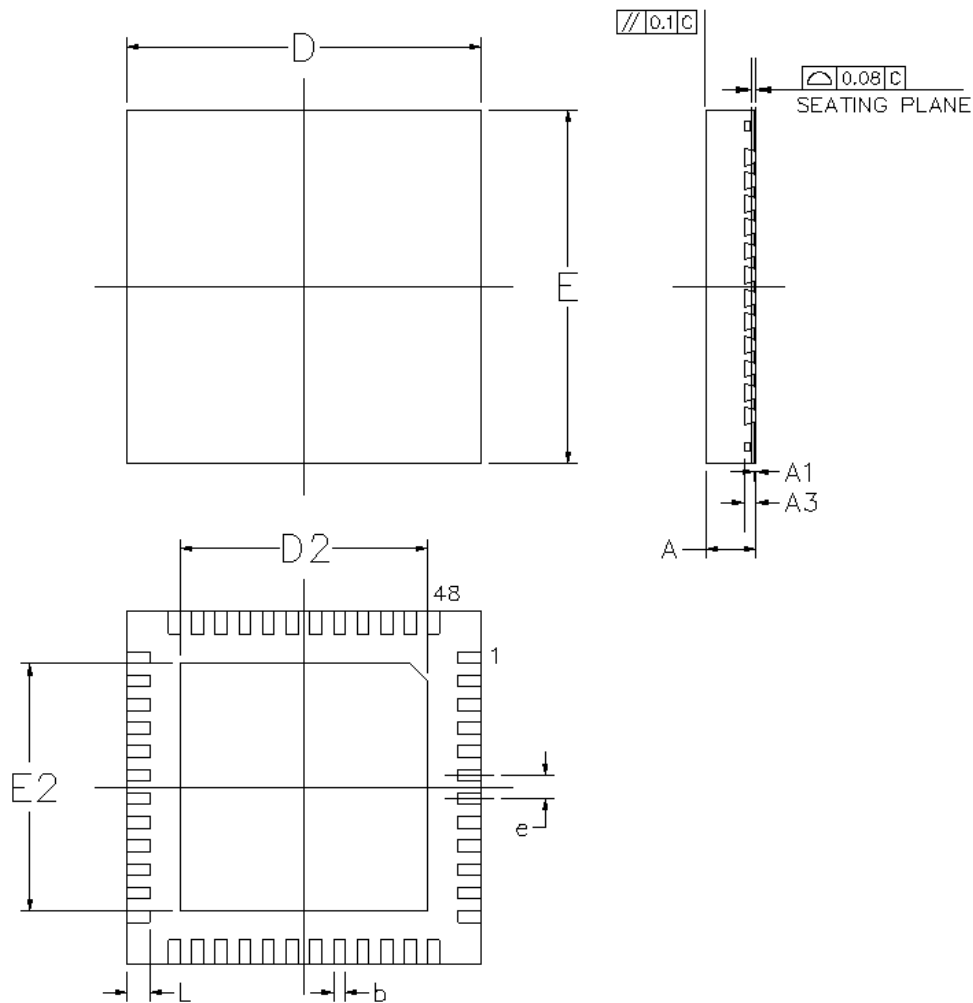

11.1. Mechanical Dimensions Notes

Symbol	Dimension in mm			Dimension in inch		
	Min	Nom	Max	Min	Nom	Max
A	0.75	0.85	1.00	0.030	0.034	0.039
A ₁	0.00	0.02	0.05	0.000	0.001	0.002
A ₃	0.20 REF			0.008 REF		
b	0.15	0.20	0.25	0.006	0.008	0.010
D/E	6.00BSC			0.236BSC		
D2/E2	4.15	4.4	4.65	0.163	0.173	0.183
e	0.40BSC			0.016BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020

Notes:

1. CONTROLLING DIMENSION: MILLIMETER (mm).
2. REFERENCE DOCUMENT: JEDEC MO-220

12. Ordering Information

Table 88. Ordering Information

Part Number	Package	Status
ALC233-VB2-CG	MQFN-48 'Green' Package (6mm x 6mm) (Tray)	MP*
ALC233-VB2-CGT	MQFN-48 'Green' Package (6mm x 6mm) (Tape and Reel)	MP*

**Please contact Realtek sales representative for sample availability.*

Realtek Semiconductor Corp.**Headquarters**

No. 2, Innovation Road II

Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com