


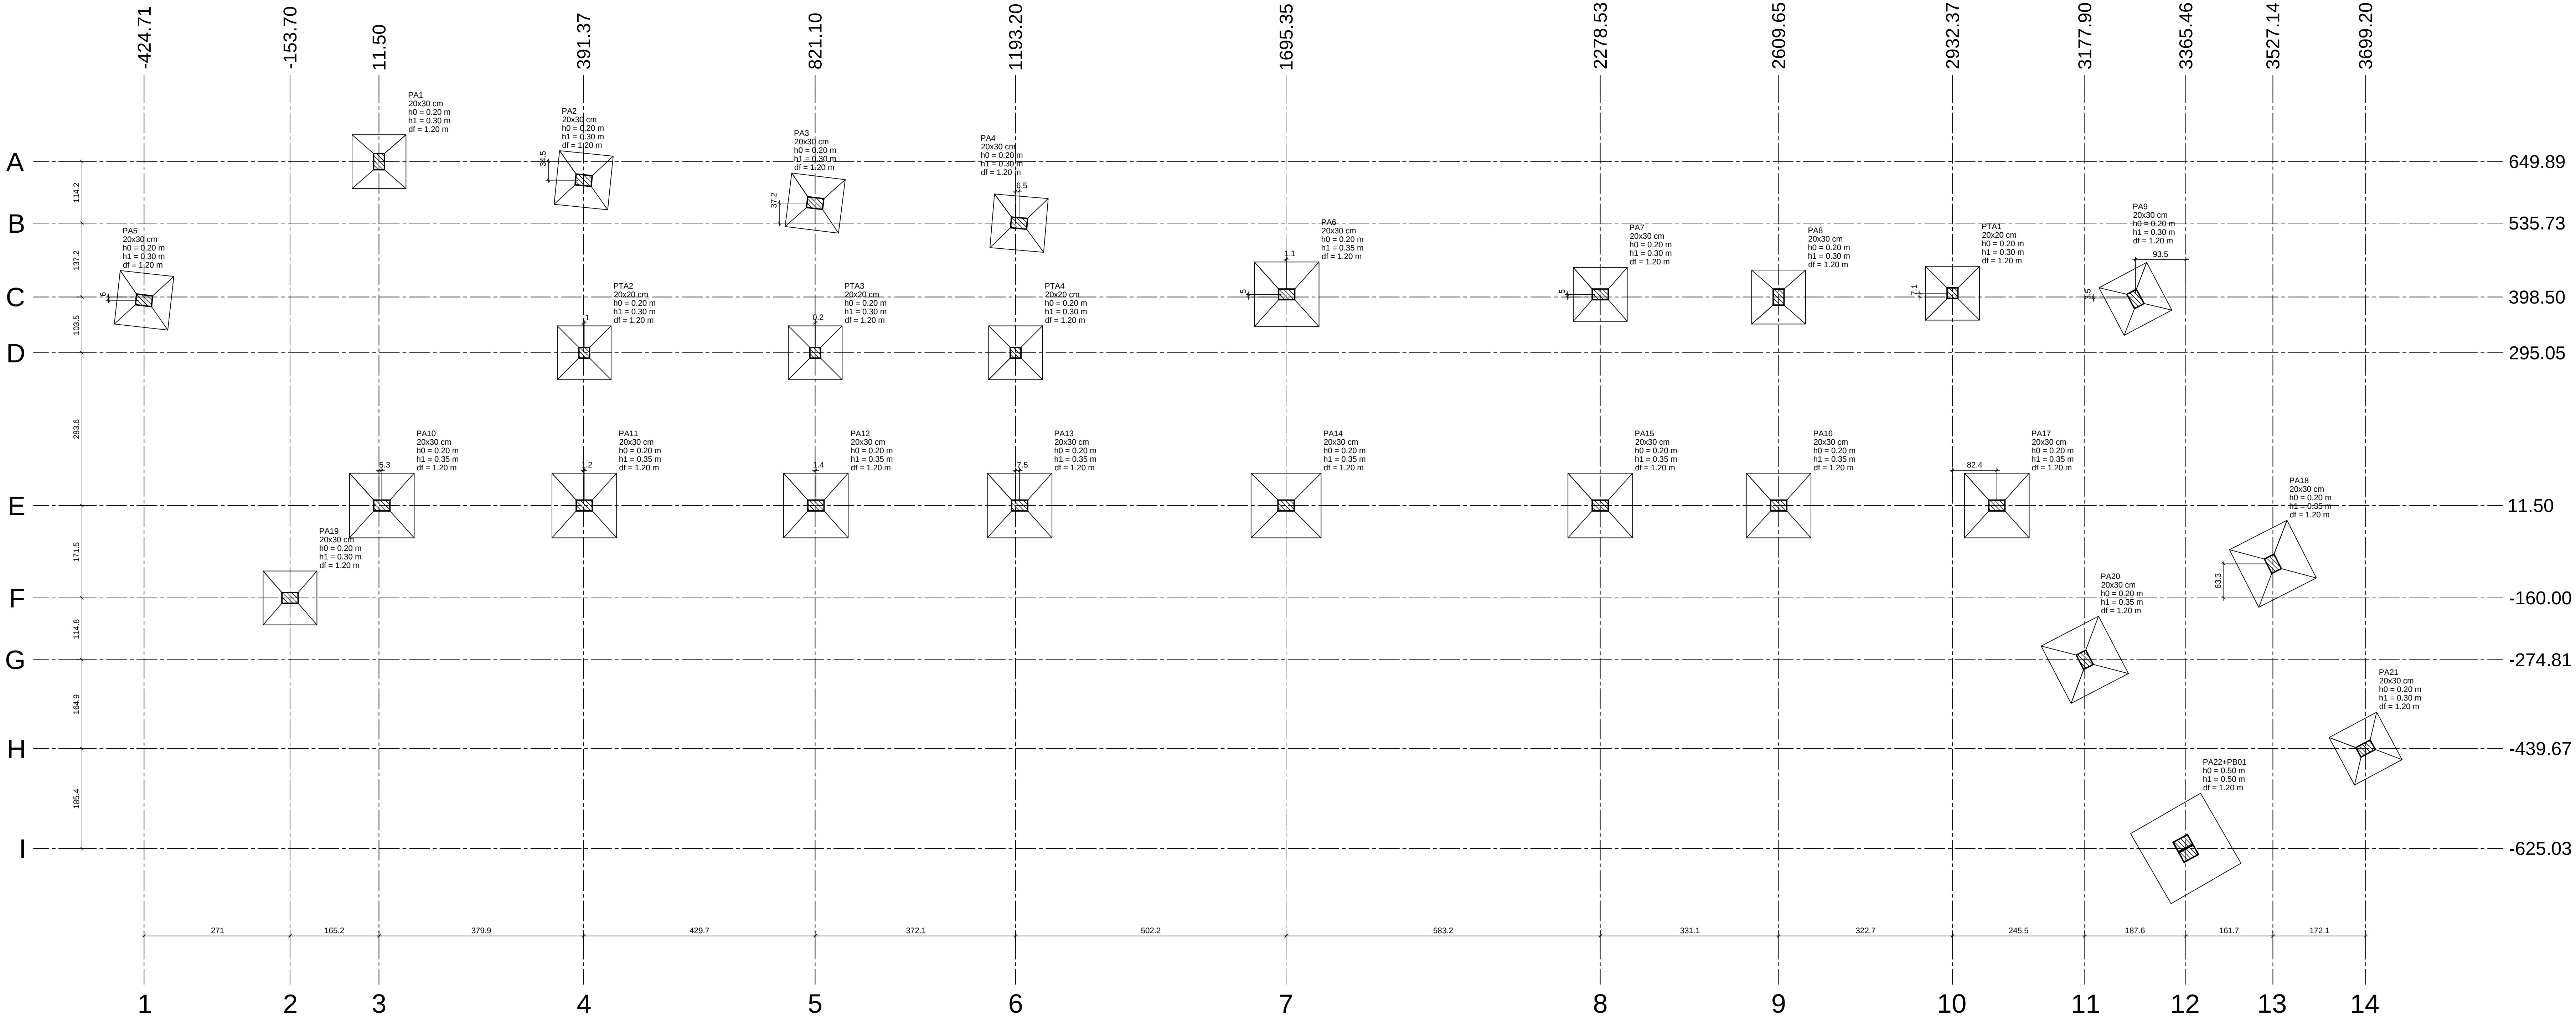

Nome	Seção (cm)	X (cm)	Y (cm)	Carga Máx. (t)	Carga Mín. (t)	Pilar				Fundação								
						Mx Máximo (kgf.m)		My Máximo (kgf.m)		Fx Máximo (tf)		Fy Máximo (tf)		Lado B (cm)	Lado H (cm)	h0 / ha (m)	h1 / hb (m)	d (m)
						Positivo	Negativo	Positivo	Negativo	Positivo	Negativo	Positivo	Negativo					
PA1	20x30	11.50	649.89	15.7	12.1	0	0	0	0	0.0	-0.2	0.5	0.0	100	100	0.20	0.30	1.20
PA2	20x30	391.37	615.38	19.8	14.4	0	0	0	0	0.2	-0.2	0.3	0.0	100	100	0.20	0.30	1.20
PA3	20x30	821.10	572.91	15.8	11.8	0	0	0	0	0.3	0.0	0.2	-0.2	100	100	0.20	0.30	1.20
PA4	20x30	1199.66	535.73	17.8	13.6	0	0	0	0	0.0	-0.5	0.1	-0.2	100	100	0.20	0.30	1.20
PA5	20x30	-424.71	392.49	5.4	4.3	0	0	0	0	0.2	0.0	0.1	0.0	100	100	0.20	0.30	1.20
PA6	20x30	1695.47	403.53	25.4	18.4	0	0	0	0	0.0	-0.7	0.6	0.0	120	120	0.20	0.35	1.20
PA7	20x30	2278.53	403.50	18.4	13.4	0	0	0	0	0.6	0.0	0.8	0.0	100	100	0.20	0.30	1.20
PA8	20x30	2609.65	398.50	17.3	13.1	0	0	0	0	0.1	-0.2	0.8	0.0	100	100	0.20	0.30	1.20
PA9	20x30	3271.97	395.03	14.9	11.4	0	0	0	0	0.2	0.0	0.9	0.0	100	100	0.20	0.30	1.20
PA10	20x30	16.79	11.50	23.1	17.8	0	0	0	0	0.1	-0.1	0.0	-0.3	120	120	0.20	0.35	1.20
PA11	20x30	392.52	11.50	22.1	16.9	0	0	0	0	0.2	-0.2	0.1	-0.2	120	120	0.20	0.35	1.20
PA12	20x30	822.53	11.50	21.1	16.3	0	0	0	0	0.2	-0.2	0.1	-0.3	120	120	0.20	0.35	1.20
PA13	20x30	1200.70	11.50	22.5	17.3	0	0	0	0	0.1	-0.2	0.0	-0.3	120	120	0.20	0.35	1.20
PA14	20x30	1695.35	11.50	29.8	22.0	0	0	0	0	0.1	-0.1	0.0	-0.7	120	130	0.20	0.35	1.20
PA15	20x30	2278.53	11.50	26.5	19.7	0	0	0	0	0.3	0.0	0.0	-0.8	120	120	0.20	0.35	1.20
PA16	20x30	2609.65	11.50	18.2	14.1	0	0	0	0	0.1	-0.2	0.0	-0.9	120	120	0.20	0.35	1.20
PA17	20x30	3014.74	11.50	27.1	18.7	0	0	0	0	0.1	-0.2	0.0	-0.4	120	120	0.20	0.35	1.20
PA18	20x30	3527.14	-96.71	21.1	15.5	0	0	0	0	0.7	0.0	0.3	0.0	120	120	0.20	0.35	1.20
PA19	20x30	-153.70	-160.00	2.8	2.3	0	0	0	0	0.1	-0.2	0.2	0.0	100	100	0.20	0.30	1.20
PA20	20x30	3177.90	-274.81	22.0	17.0	0	0	0	0	0.0	-0.7	0.0	-0.5	120	120	0.20	0.35	1.20
PA21	20x30	3699.20	-439.67	10.0	7.8	0	0	0	0	0.3	0.0	0.0	-0.5	100	100	0.20	0.30	1.20
PA22+PB01	20x20	3365.46	-625.03	35.2	32.3	0	0	0	0	0.1	0.0	0.0	-0.1	150	150	0.50	0.50	1.20
PTA1	20x20	2932.37	405.58	6.7	4.6	0	0	0	0	0.1	0.0	0.1	0.0	100	100	0.20	0.30	1.20
PTA2	20x20	392.39	295.05	12.7	6.5	0	0	0	0	0.1	0.0	0.1	-0.1	100	100	0.20	0.30	1.20
PTA3	20x20	821.26	295.08	11.0	6.1	0	0	0	0	0.1	0.0	0.1	0.0	100	100	0.20	0.30	1.20
PTA4	20x20	1193.20	295.10	14.3	8.9	0	0	0	0	0.0	0.0	0.3	0.0	100	100	0.20	0.30	1.20

Os esforços indicados nesta tabela são os valores máximos obtidos pela envoltória de todas as combinações definidas para as fundações. Para análises complementares, deve-se consultar o relatório de esforços na fundação, que apresenta os valores calculados para cada combinação.

Localização no eixo X		Nome
Coordenadas (cm)		
-424.71	PA5	
-153.70	PA19	
11.50	PA1	
16.79	PA10	
391.37	PA2	
392.39	PA2A	
392.52	PA11	
821.10	PA3	
821.26	PA23	
822.53	PA12	
1193.20	PTA4	
1199.66	PA13	
1200.70	PA4	
1695.35	PA14	
1598.50	PA6	
2278.53	PA7, PA15	
2609.65	PA8, PA16	
2932.37	PTA1	
3014.74	PA17	
3177.90	PA20	
3217.97	PA29	
3365.46	PA22+PB01	
3527.14	PA18	
3699.20	PA21	