NCM 8536.90.90

Proposta de Descrição da Autopeça

Conector rotativo para volante de veículos automóveis, com conexão através de cabo flat, estator fabricado em (PBT) e rotor de poliacetal (POM), com torque de giro inferior à 0.81 kgf.cm, capaz de operar em faixa de temperaturas de -40 à +90 graus Celsius, com liberdade de revoluções a partir da posição neutra, de 2 revoluções no sentido horário e no sentido anti-horário.

Informações Técnicas Detalhadas

Conector elétrico aplicado em volantes de veículo automóveis, com função de conectar a buzina, comandos elétricos do sistema de áudio do colante e o sistema de inflamento do air-bag.

Materiais Utilizados

Estator: PBT, mola: SWPB, Case principal: PBT, rotor: POM, cabos tipo flat.

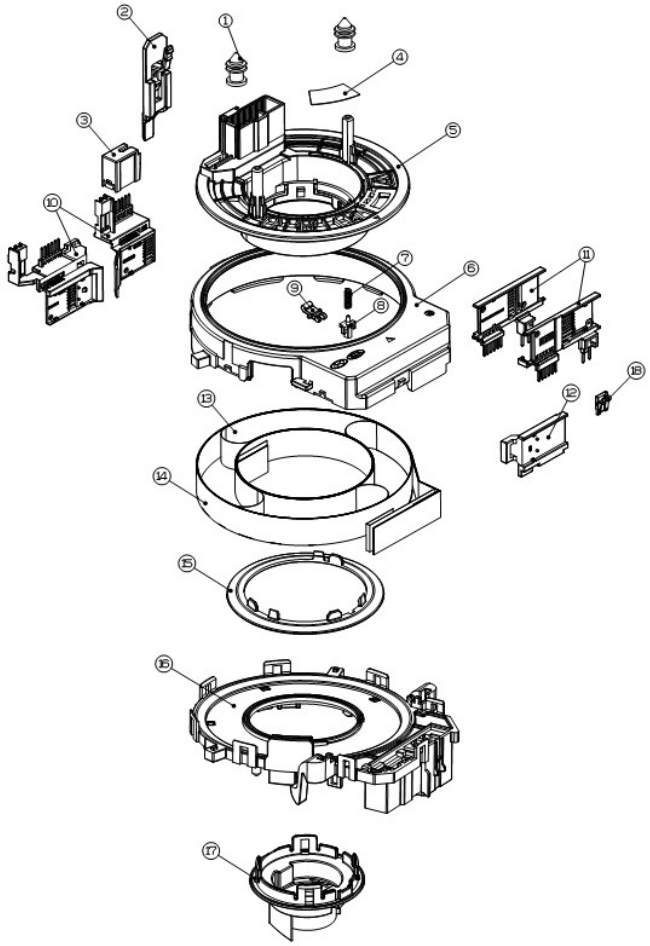

Purchasing Logistics/Customs Clearance / B1
10.127.46.107

B137102089 / 10.127.46.107 / Mar 03, 2022 03:09 (UTC+9) / This document is not allowed to copy or distribute illegally as a information property of HMB. If you violate this rule, you can be punished by policy of HMB and related local law.