



MC 120B

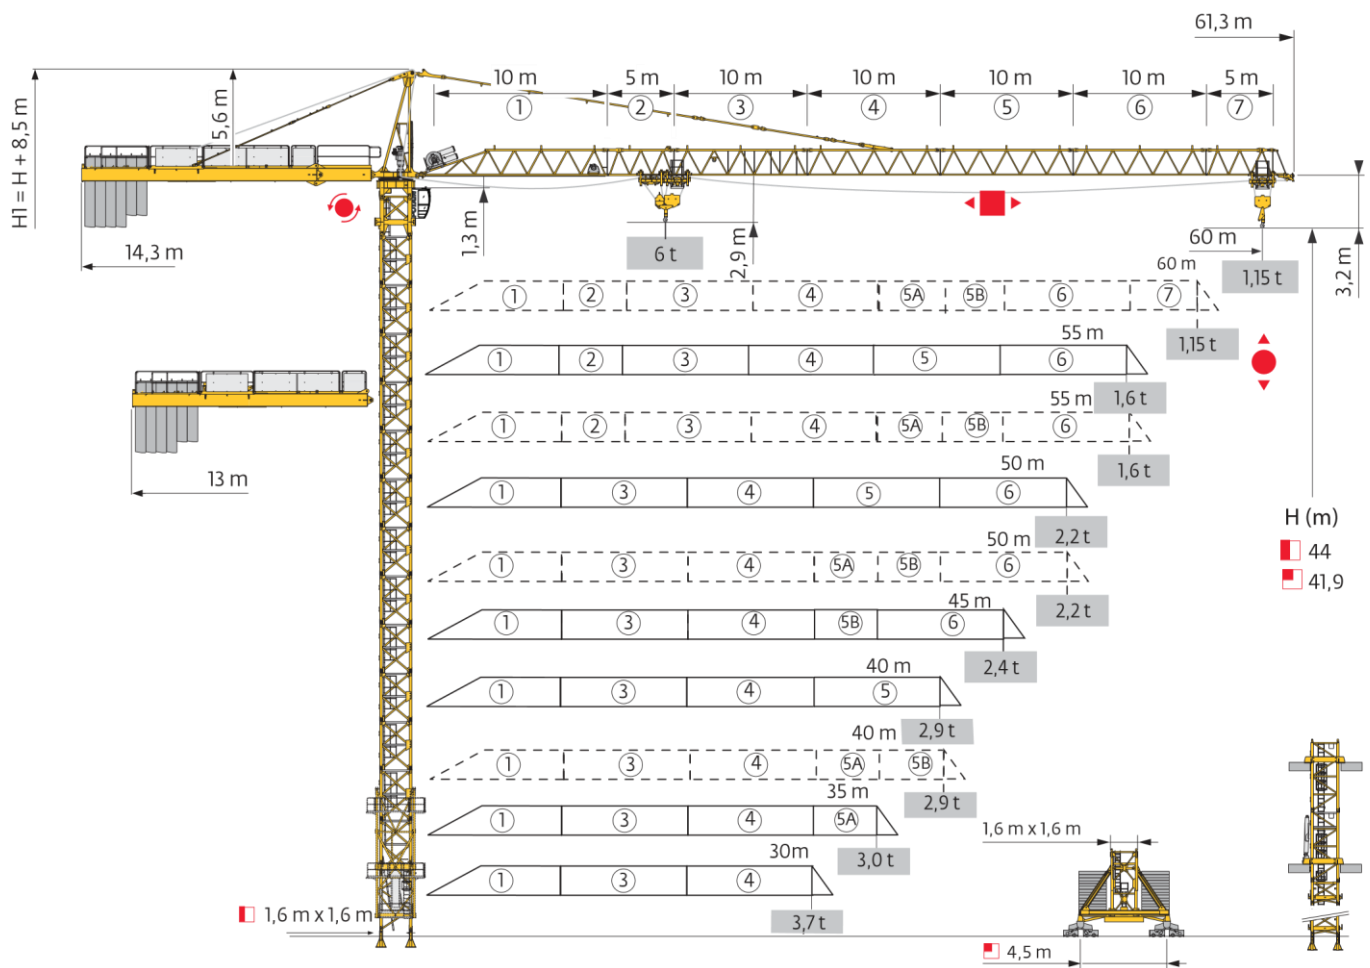


□ 茹劇 □ □ □

☒ 1.6 m

 30 m \rightarrow 60 m

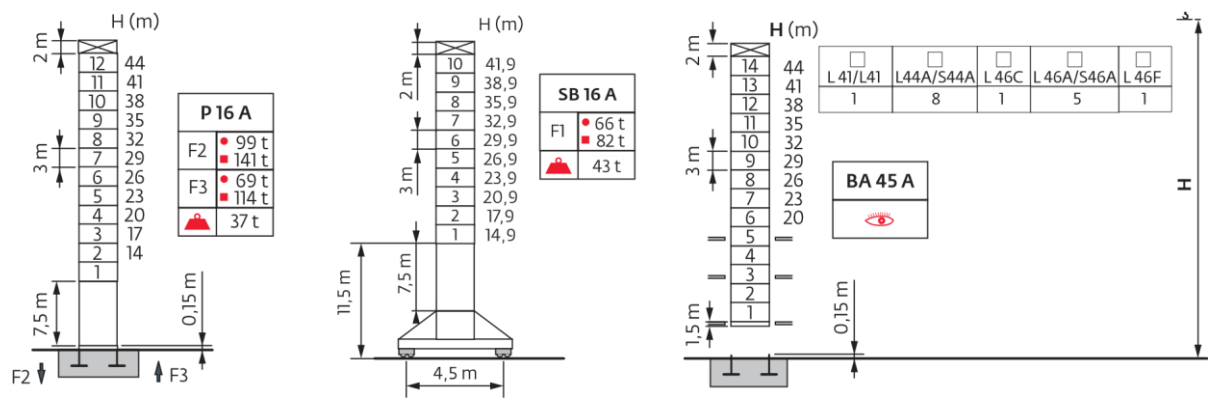

VERSÃO ASCENSIONAL

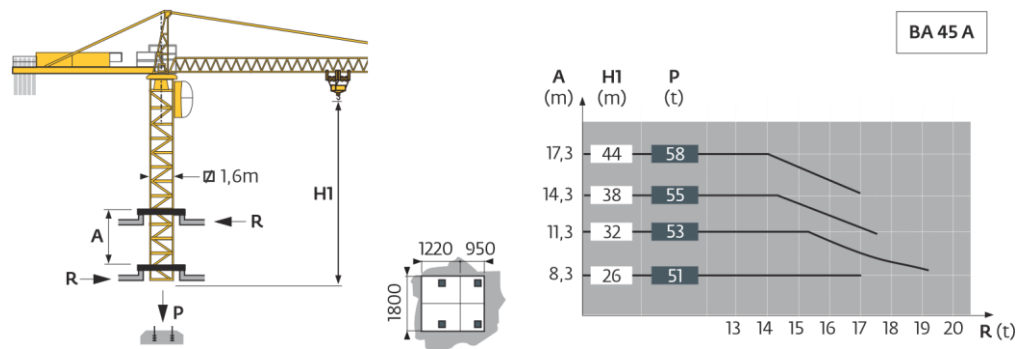

ANCORAGENS

P 16 A AL 400


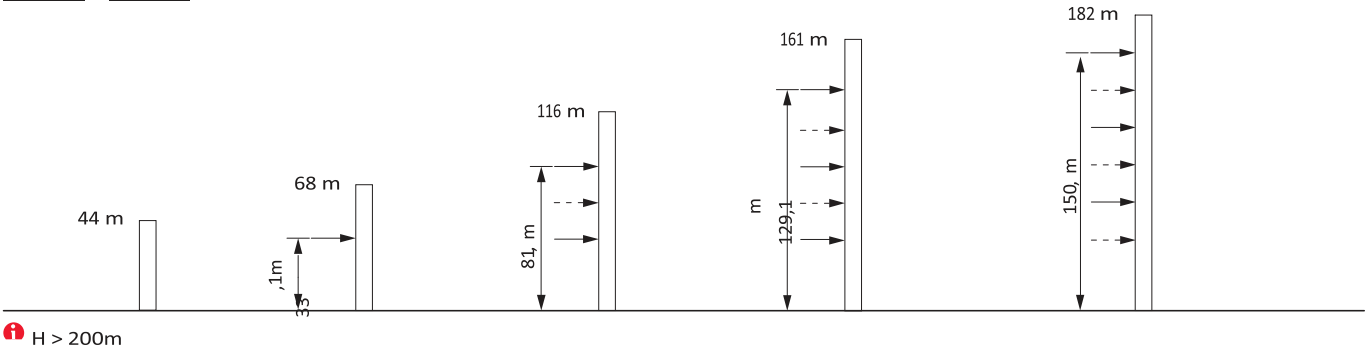


GRÁFICO DE CARGAS










60 m	3,1	▶	14,7	17	19	20	21	24	25,6	28,2	33	35	38	39	40	43	46	49	50	53	55	57	60	m
▲▲▲			6,0	5,0	4,4	4,1	3,9	3,3	3,0	3,0	2,5	2,3	2,1	2,05	1,95	1,8	1,65	1,5	1,45	1,35	1,3	1,25	1,15	t
55 m	3,1	▶	17,1	19	20	21	24	27	29,9	33	35	38	39	40	43	46	49	50	53	55				m
▲▲▲			6,0	5,3	5,0	4,7	4,0	3,4	3,0	3,0	2,8	2,55	2,45	2,4	2,2	2,0	1,85	1,8	1,7	1,6				t
50 m	3,1	▶			20	21	24	27	30	33	34,9	38,6	39	40	43	46	49	50						m
▲▲▲					6,0	5,6	4,8	4,2	3,6	3,2	3,0	3,0	2,95	2,9	2,65	2,45	2,25	2,2						t
45m	3,1	▶			20	21	24	27	30	33	34,9	38,6	39	40	43	45								m
▲▲▲					6,0	5,6	4,8	4,2	3,6	3,2	3,0	3,0	2,95	2,9	2,65	2,5								t
40 m	3,1	▶			20,1	21	24	27	30	33	35	35,1	38,9	40										m
▲▲▲					6,0	5,7	4,8	4,2	3,7	3,3	3,0	3,0	3,0	2,9										t
35m	3,1	▶			20	21	24	27	30	33	35													m
▲▲▲					6,0	5,7	4,8	4,2	3,7	3,2	3,0													t
30 m	3,1	▶			20,2	21	24	27	30															m
▲▲▲					6,0	5,7	4,9	4,2	3,7															t



3

LASTROS DE BASE


□	SB 16 A	H (m)	41,9	38,9	35,9	32,9	29,9	26,9	23,9	20,9	17,9	14,9
1,6 m	◀●▶	(t)	78	66	66	60	60	60	54	54	54	54

CONTRAPESOS		 (kg) (+/- 5%)		40 LVF / 33 PC 				
			3450 kg	2250 kg	 (kg)	3700 kg	2250 kg	 (kg)
60 m	8180	8695	5	0	17 250	4	1	17 050
55 m	7935	8450	-	-	-	5	0	18 500
50 m	7315	7830	4	1	16 050	4	1	17 050
45 m	6920	7435	3	2	14850	3	2	15600
40 m	6790	7305	4	0	13 800	2	3	14 150
35 m	6431	6946	1	4	12450	1	4	12700
30 m	5975	6490	2	2	11 400	2	2	11 900



CCB - 3700 kg

CD - 3450 kg

CE - 2250 kg











□ □ 鋼圓與













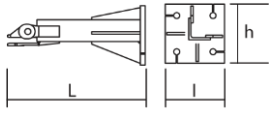


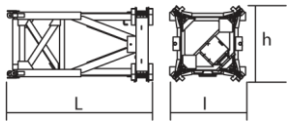











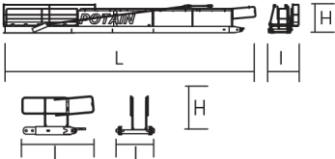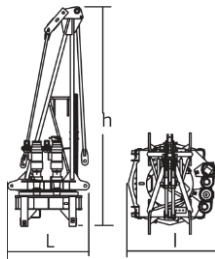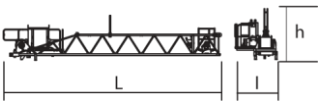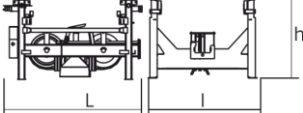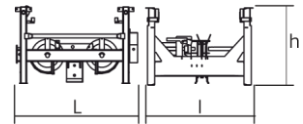



:  60 m -   - 

 x 3
□ □ 蛇脣  x 3

□ 33 PC 15 / 40 LVF 15

DESCRIÇÃO		L (m)	l (m)	h (m)	kg (+/-5%)
Contralança		11,94	1,46		2215
		1,68	1,17	1,40 0,26	370
Cabine	 Smartview 胜景舱	1,68	1,18	2,31	385
Pivô	 1,6 m RCV 145	2,37	1,92	6,97	4680
Lança (Pé)	 ① 33 PC 15 40 LVF 15	10,12 10,12	1,3 1,3	1,16 1,16	3200 3200
Lança 10m	 ③ ④ ⑤ ⑥	10,2 10,3 10,3 10,3	1,1 1,1 1,1 1,1	1,3 1,3 1,3 1,3	1125 1275 815 525
Lança 5m	 ② 5A 5B ⑦	5,2 5,22 5,19 5,2	1,1 1,1 1,1 1,1	1,3 1,2 1,2 1,3	620 456 420 245
Carro 1	 6t	1,6	1,4	1	270
Carro 2	 6t 3t	1,5	1,4	1	290 260
		1,5	1,4	1	

Moitão			 6t	1,3	0,3	1,55	330
				0,78	0,3	1,55	115
Gaiola de Telescopiação			 1,6 m	L (m)	I (m)	h (m)	kg (+/- 5%)
				6,8	3,65	3,9	3430
S 46 J			 1,6 m	7,8	1,8	1,7	2630
S 46A1 L 46 A3			 1,6 m 1,6 m	3,5 3,24	1,8 1,67	1,7 1,73	1199 1180
Base							
Pés Chumbadores			 P 16 A	1,14	0,49	0,49	185 145
				0,69	0,5	0,5	
Base Chassis				3,61	1,96	1,96	2645
Travessa				3,18	0,25	0,24	230
Chassis A				5,08	0,61	1,79	1115

440 V -50 Hz									hp	kW	
	33 PC 15 (GH)	m/min	10	40	80	5	20	40	33	28,8	400 m
		t	3	3	1,5	6	6	3			
	4 D3 V3	m/min	15 → 30 → 58						4	3,6	
	RCV 145	tr/min	0 → 0,96						2 x 6	2 x 5,28	
 IEC 60204-32											
380 V (+10% -10%) 50 Hz					33 PC – 47 KW total						

