



# Web Application Scanning API

User Guide

Version 3.9

November 12, 2021

## Table of Contents

Get Started .....	7
Web Application Scanning API .....	7
Qualys user account.....	8
Making API Calls .....	9
URL to Qualys API server.....	13
Tracking API usage by user.....	14
How to Download Vulnerability Details .....	15
Know your portal version.....	20
JSON Support.....	23
Web Applications.....	36
Web Application Count .....	36
Search Web Application.....	39
Get Web Application Details .....	46
Create Web Application.....	59
Update Web Application.....	84
Delete Web Application .....	92
Purge Web Application .....	96
Download Selenium Script .....	100
Reference: WebApp.....	103
Authentication.....	114
Authentication Count .....	114
Search Authentication Record.....	117

Get Authentication Record Details .....	122
Create Authentication Record .....	131
Update Authentication Record.....	156
Delete Authentication Record.....	163
Reference: Authentication.....	167
Catalog .....	170
Catalog Entry Count .....	170
Search for a Catalog Entry .....	172
Get Catalog Entry Details .....	176
Update Catalog Entry.....	179
Delete Catalog Entry.....	181
Update Entries in Catalog.....	184
Add to Subscription .....	185
Scans .....	187
Scan Count.....	187
Search Scans .....	192
Get Scan Details.....	203
Launch Scans (Single).....	210
Launch Scan (Multiple) .....	221
Scan Again .....	231
Retrieve Scan Status.....	233
Retrieve Scan Results.....	235
Cancel Scan .....	245

Delete Scan.....	247
WasScan Reference .....	250
WAS Scan Results Reference.....	256
Schedules .....	258
Schedule Count.....	258
Search Schedule .....	263
Get Schedule Details.....	272
Create a Schedule (single web application).....	276
Create Schedules (Multiple).....	293
Update Schedule .....	307
Activate an Existing Schedule.....	311
Deactivate Schedule .....	315
Delete Schedule .....	319
Download Schedule .....	322
Reference: Schedule .....	325
Reference: WasScanSchedule.....	327
Reports.....	335
Report Count .....	335
Search Report.....	338
Get Report Details .....	343
Get Report Status .....	345
Download Report .....	347
Send Encrypted PDF Report .....	348

Update Report.....	350
Delete Report.....	352
Report Creation .....	355
Create Report .....	355
Web Application Report .....	356
Scan Report.....	364
Scorecard Report .....	374
Catalog Report.....	381
Report Template Count .....	386
Search Report Template .....	388
Get details of Report Template .....	392
Reference: Report .....	395
Reference: Report Creation .....	398
Findings.....	404
Finding Count .....	404
Search Findings.....	409
Get Finding Details .....	420
Ignore Findings .....	428
Activate Findings .....	436
Edit Finding Severity .....	441
Restore Findings Severity.....	445
Retest Findings .....	449
Retrieve Finding Retest Status .....	452

WAS Findings in XML Report.....	454
Reference: Findings.....	460
Configuration .....	463
Option Profiles.....	463
DNS Override.....	533
Burp .....	556
Import Burp Issues.....	556
Error Messages.....	569
Sample Messages: Elements .....	569
Sample Messages: Authorization .....	573
Sample Messages: Criteria.....	574
Sample Messages: Report Storage Limit .....	575
Available operators .....	576

# Get Started

## Web Application Scanning API

The Web Application Scanning (WAS) API support scanning and reporting on web applications for security risks.

Modules supported

WAS

Authentication

Authentication to your Qualys account with valid Qualys credentials is required for making Qualys API requests to the Qualys API servers. [Learn more about authentication to your Qualys account](#)

Get API Notifications

We recommend you join our Community and subscribe to our API Notifications RSS Feeds for announcements and discussions.

<https://community.qualys.com/community/developer/notifications-api>

About Qualys

Qualys, Inc. (NASDAQ: QLYS) is a pioneer and leading provider of cloud-based security and compliance solutions. The Qualys Cloud Platform and its integrated Cloud Apps deliver businesses critical security intelligence continuously, enabling them to automate the full spectrum of auditing, compliance and protection for IT systems and web applications on premises, on endpoints and elastic clouds. For more information, please visit [www.qualys.com](http://www.qualys.com)

Qualys and the Qualys logo are proprietary trademarks of Qualys, Inc. All other products or names may be trademarks of their respective companies

## Qualys user account

Authentication to your Qualys account with valid Qualys credentials is required for making Qualys API requests to the Qualys API servers.

The application must authenticate using Qualys account credentials (user name and password) as part of the HTTP request. The credentials are transmitted using the “Basic Authentication Scheme” over HTTPS.

For information, see the “Basic Authentication Scheme” section of RFC #2617:

<http://www.faqs.org/rfcs/rfc2617.html>

The exact method of implementing authentication will vary according to which programming language is used.

The allowed methods, POST and/or GET, for each API request are documented with each API call in this user guide.

### Sample request - basic authentication

```
curl -u "USERNAME:PASSWORD"  
https://qualysapi.qualys.com/qps/rest/3.0/count/was/webapp
```

## Making API Calls

### Curl samples in our API doc

We use curl in our API documentation to show an example how to form REST API calls, and it is not meant to be an actual production example of implementation.

### Making Requests with an XML Payload

While it is still possible to create simple API requests using the GET method, you can create API requests using the POST method with an XML payload to make an advanced request.

The XML payloads can be compared to a scripting language that allows user to make multiple actions within one single API request, like adding a parameter to an object and updating another parameter.

The XML structure of the payload is described in the XSD files.

### XML Output Pagination / Truncation

The XML output of a search API request is paginated and the default page size is 100 object records. The page size can be customized to a value between 1 and 1,000. If the number of records is greater than the page size then the `<ServiceResponse>` element shows the response code SUCCESS with the element `<hasMoreRecords>true</hasMoreRecords>` as shown below.

Follow the process below to obtain the first two XML pages for an API request. Apply the same logic to get all the next (n+1) pages until all records are returned. This is indicated when `<hasMoreRecords>>false</hasMoreRecords>`.

Sample 1 - Search web apps

Search for web applications that have a name containing the string "Merchant". The service request in the POST data file "file.xml" defines this search criteria.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
--data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/webapp" <
file.xml
```

Note: “file.xml” contains the request POST data.

You’ll notice the operator field value is set to 123, which is the value returned in <lastId> of the previous page output. The GREATER operator is a logical “greater than” (it does not mean greater than or equal to).

### Request POST data

```
<ServiceRequest>
  <preferences>
    <limitResults>5</limitResults>
  </preferences>
  <filters>
    <Criteria field="name" operator="CONTAINS">Merchant</Criteria>
  </filters>
</ServiceRequest>
```

The number of records is greater than the default pagination value so the <ServiceResponse> element identifies the last ID of the object in the current page output.

### XML response

```
<ServiceResponse ...>
  <responseCode>SUCCESS</responseCode>
  <COUNT>5</COUNT>
  <hasMoreRecords>true</hasMoreRecords>
  <lastId>123</lastId>
  <data>
    <!--here you will find 5 web application records-->
  </data>
</ServiceResponse>
```

### Sample 2

To get the next page of results, you need to edit your service request in “file.xml” that will be passed to API request as a POST payload. According to

the <lastId> element returned in the first page, you want the next page of results to start with the object ID 124 or greater.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
--data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/webapp" <
file.xml
```

Note: “file.xml” contains the request POST data.

You’ll notice the operator field value is set to 123, which is the value returned in <lastId> of the previous page output. The GREATER operator is a logical “greater than” (it does not mean greater than or equal to).

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="name" operator="CONTAINS">Merchant</Criteria>
    <Criteria field="id" operator="GREATER">123</Criteria>
  </filters>
</ServiceRequest>
```

### Setting custom page size

The service request needs to contain the <preferences> section with the <limitResults> parameter. For the <limitResults> parameter you can enter a value from 1 to 1,000. You can change which objects are returned and the number of objects by specifying a preferences tag in the POST body of your request.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria> ... </Criteria>
  </filters>
  <preferences>
    <startFromOffset>100</startFromOffset>
    <limitResults>200</limitResults>
  </preferences>
```

```
</ServiceRequest>
```

Preferences tag fields:

startFromOffset - The first item to return by index. The default is 1.

startFromId - The first item to return by primary key. No default value.

limitResults - The total number of items to return. The default is 100.


## URL to Qualys API server

The Qualys API URL you should use for API requests depends on the Qualys platform where your account is located.

[Click here to identify your Qualys platform and get the API URL](#)

This documentation uses the API server URL for Qualys US Platform 1 (<https://qualysapi.qualys.com>) in sample API requests. If you're on another platform, please replace this URL with the appropriate server URL for your account.

Looking for your API server URL for your account? You can find this easily. Just log in to your Qualys account and go to Help > About. You'll see this information under Security Operations Center (SOC).

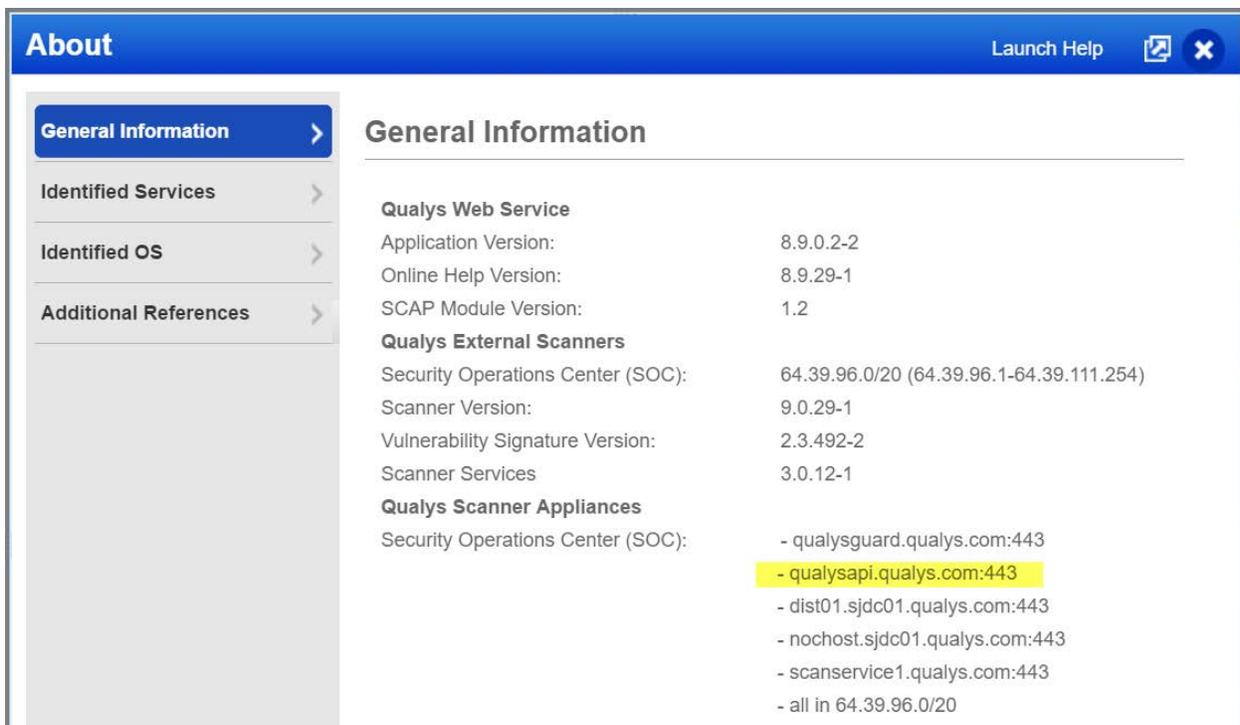

The screenshot shows the 'About' page of the Qualys interface. The page is titled 'About' and has a 'Launch Help' button in the top right corner. On the left side, there is a navigation menu with four items: 'General Information', 'Identified Services', 'Identified OS', and 'Additional References'. The 'General Information' section is currently selected and expanded. The main content area displays the following information:

General Information	
<b>Qualys Web Service</b>	
Application Version:	8.9.0.2-2
Online Help Version:	8.9.29-1
SCAP Module Version:	1.2
<b>Qualys External Scanners</b>	
Security Operations Center (SOC):	64.39.96.0/20 (64.39.96.1-64.39.111.254)
Scanner Version:	9.0.29-1
Vulnerability Signature Version:	2.3.492-2
Scanner Services	3.0.12-1
<b>Qualys Scanner Appliances</b>	
Security Operations Center (SOC):	- qualysguard.qualys.com:443 - <b>qualysapi.qualys.com:443</b> - dist01.sjdc01.qualys.com:443 - nochohost.sjdc01.qualys.com:443 - scanservice1.qualys.com:443 - all in 64.39.96.0/20

## Tracking API usage by user

You can track API usage per user without the need to provide user credentials such as the username and password. Contact Qualys Support to get the X-Powered-By HTTP header enabled.

Once enabled, the X-Powered-By HTTP header is returned for each API request made by a user. The X-Powered-By value includes a unique ID generated for each subscription and a unique ID generated for each user.

### Optional X-Powered-By header

API usage can be tracked using the X-Powered-By HTTP header which includes a unique ID generated for each subscription and a unique ID generated for each user. Once enabled, the X-Powered-By HTTP header is returned for each API request made by a user. The X-Powered-By HTTP header will be returned for both valid and invalid requests. However, it will not be returned if an invalid URL is hit or when user authentication fails.

The X-Powered-By header is returned in the following format:

```
X-Powered-By: Qualys:<POD_ID>:<SUB_UUID>:<USER_UUID>
```

where,

- POD\_ID is the shared POD or a PCP. Shared POD is USPOD1, USPOD2, etc.
- SUB\_UUID is the unique ID generated for the subscription
- USER\_UUID is the unique ID generated for the user. You can use the USER\_UUID to track API usage per user.

### Sample X-Powered-By header

```
X-Powered-By: Qualys:QAPOD4SJC:f972e2cc-69d6-7ebd-80e6-7b9a931475d8:06198167-43f3-7591-802a-1c400a0e81b1
```

## How to Download Vulnerability Details

`/api/2.0/fo/knowledge_base/vuln/?action=list`

[GET] [POST]

When you download web application scan results using the WAS API, you'll want to view vulnerability descriptions from the Qualys KnowledgeBase in order to understand the vulnerabilities detected and see our recommended solutions. You can do this programmatically using the KnowledgeBase API (`api/2.0/fo/knowledge_base/vuln/?action=list`). This API function is part of the Qualys API and it's described in the Qualys API (VM, SCA, PC) User Guide (click [here](#) to download the latest version)

### Input Parameters

When filter parameters are specified, these parameters are ANDed

Parameter	Description
<code>action=list</code>	(Required) A flag used to request the download of vulnerability data from the KnowledgeBase.
<code>echo_request={0 1}</code>	(Optional) Show (echo) the request's input parameters (names and values) in the XML output. When unspecified, parameters are not included in the XML output. Specify 1 to view parameters in the output.
<code>details={Basic All None}</code>	(Optional) Show the requested amount of information for each vulnerability in the XML output. A valid value is: Basic (default), All, or None. Basic includes basic elements plus CVSS Base and Temporal scores. All includes all vulnerability details, including the Basic details.

`ids={value}` (Optional) Used to filter the XML output to include only vulnerabilities that have QID numbers matching the QID numbers you specify.

`id_min={value}` (Optional) Used to filter the XML output to show only vulnerabilities that have a QID number greater than or equal to a QID number you specify.

`id_max={value}` (Optional) Used to filter the XML output to show only vulnerabilities that have a QID number less than or equal to a QID number you specify.

`is_patchable={0|1}` (Optional) Used to filter the XML output to show only vulnerabilities that are patchable or not patchable. A vulnerability is considered patchable when a patch exists for it. When 1 is specified, only vulnerabilities that are patchable will be included in the output. When 0 is specified, only vulnerabilities that are not patchable will be included in the output. When unspecified, patchable and unpatchable vulnerabilities will be included in the output.

`last_modified_after={date}` (Optional) Used to filter the XML output to show only vulnerabilities last modified after a certain date and time. When specified vulnerabilities last modified by a user or by the service will be shown. The date/time is specified in YYYY-MM-DD[THH:MM:SSZ] format (UTC/GMT).

`last_modified_before={date}` (Optional) Used to filter the XML output to show only vulnerabilities last modified before a certain date and time. When specified vulnerabilities last modified by a user or by the service will be shown. The date/time is specified in YYYY-MM-

DD[THH:MM:SSZ] format (UTC/GMT).

last\_modified\_by\_  
user\_after={date}

(Optional) Used to filter the XML output to show only vulnerabilities last modified by a user after a certain date and time. The date/time is specified in YYYY-MM-DD[THH:MM:SSZ] format (UTC/GMT).

last\_modified\_by\_  
user\_before={date}

(Optional) Used to filter the XML output to show only vulnerabilities last modified by a user before a certain date and time. The date/time is specified in YYYY-MM-DD[THH:MM:SSZ] format (UTC/GMT).

last\_modified\_by\_  
service\_after={date}

(Optional) Used to filter the XML output to show only vulnerabilities last modified by the service after a certain date and time. The date/time is specified in YYYY-MM-DD[THH:MM:SSZ] format (UTC/GMT).

last\_modified\_by\_  
service\_before={date}

(Optional) Used to filter the XML output to show only vulnerabilities last modified by the service before a certain date and time. The date/time is specified in YYYY-MM-DD[THH:MM:SSZ] format (UTC/GMT).

published\_after={date}

(Optional) Used to filter the XML output to show only vulnerabilities published after a certain date and time. The date/time is specified in YYYY-MM-DD[THH:MM:SSZ] format (UTC/GMT).

published\_before={date}

(Optional) Used to filter the XML output to show only vulnerabilities published before a certain date and time. The date/time is specified in YYYY-MM-DD[THH:MM:SSZ] format (UTC/GMT).

discovery\_method={value}

(Optional) Used to filter the XML output to show only vulnerabilities assigned a certain discovery method. A valid value is: Remote, Authenticated, RemoteOnly,

AuthenticatedOnly, or  
RemoteAndAuthenticated.

When “Authenticated” is specified, the service shows vulnerabilities that have at least one associated authentication type. Vulnerabilities that have at least one authentication type can be detected in two ways: 1) remotely without using authentication, and 2) using authentication.

`discovery_auth_types={value}` (Optional) Used to filter the XML output to show only vulnerabilities having one or more authentication types. A valid value is: Windows, Oracle, Unix or SNMP. Multiple values are entered as a comma-separated list.

`show_pci_reasons={0|1}` (Optional) Used to filter the XML output to show reasons for passing or failing PCI compliance (when the CVSS Scoring feature is turned on in the user’s subscription). Specify 1 to view the reasons in the XML output. When unspecified, the reasons are not included in the XML output.

## Sample - All vulnerabilities in KnowledgeBase, all details

### API request

```
curl -u "user:password" -H "X-Requested-With: Curl" -X "POST"
-d "action=list"
"https://qualysapi.qualys.com/api/2.0/fo/knowledge_base/vuln/" >
output.txt
```

## Sample - Patchable vulnerabilities, all details

### API request

```
curl -u "user:password" -H "X-Requested-With: Curl" -X "POST"
-d "action=list&ids=1-200&is_patchable=1&details=All"
"https://qualysapi.qualys.com/api/2.0/fo/knowledge_base/vuln/" >
output.txt
```

## Sample - Vulnerabilities modified after certain date

### API request

```
curl -u "user:password" -H "X-Requested-With: Curl" -X "POST"
-d "action=list&last_modified_by_service_after=2018-07-20
&discovery_method=RemoteAndAuthenticated"
"https://qualysapi.qualys.com/api/2.0/fo/knowledge_base/vuln/" >
output.txt
```

### DTD

[<platform API server>](#)/api/2.0/fo/knowledge\_base/vuln/knowledge\_base\_vuln\_list\_output.dtd

## Know your portal version

/qps/rest/portal/version/

[GET] [POST]

Using the Version API you can find out the installed version of Portal and its sub-modules that are available in your subscription.

Sample XML

### API request

```
curl -u "USERNAME:PASSWORD" -X "GET" -H "Accept: application/xml"
https://qualysapi.qualys.com/qps/rest/portal/version
```

### Response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/ve
rsion.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Portal-Version>
      <PortalApplication-VERSION>3.5.0.0-SNAPSHOT-1 DEVELOP #92
(2021-01-19T01:51:21Z)</PortalApplication-VERSION>
      <ITAM-VERSION>1.3.1.0-18</ITAM-VERSION>
      <CS-VERSION>1.9.0.0-SNAPSHOT</CS-VERSION>
      <CA-VERSION>3.4.0.0</CA-VERSION>
      <QGS-VERSION>1.2.0.0-6</QGS-VERSION>
      <QUESTIONNAIRE-VERSION>2.26.0.0</QUESTIONNAIRE-VERSION>
      <SAC-VERSION>1.0.0-SNAPSHOT</SAC-VERSION>
      <WAF-VERSION>2.12.6.0</WAF-VERSION>
      <QUESTIONNAIRE__V2-VERSION>1.13.1.0-
SNAPSHOT</QUESTIONNAIRE__V2-VERSION>
      <WAS-VERSION>6.17.0.0-SNAPSHOT-32</WAS-VERSION>
      <FIM-VERSION>2.6.0.0-23</FIM-VERSION>
      <ICS-VERSION>0.9.1.0-12</ICS-VERSION>
      <VM-VERSION>1.0.3</VM-VERSION>
```

```

<CERTVIEW-VERSION>2.8.0.0-20</CERTVIEW-VERSION>
<CLOUDVIEW-VERSION>1.9.2.0-SNAPSHOT</CLOUDVIEW-VERSION>
<CM-VERSION>1.31.0.0</CM-VERSION>
<MDS-VERSION>2.16.1.0-SNAPSHOT-2</MDS-VERSION>
<PM-VERSION>1.5.0.0-2</PM-VERSION>
<PS-VERSION>1.3.0.0-16</PS-VERSION>
<IOC-VERSION>1.2.0-15</IOC-VERSION>
<THREAT__PROTECT-VERSION>1.5.0-SNAPSHOT</THREAT__PROTECT-
VERSION>
<AV2-VERSION>0.1.0</AV2-VERSION>
<UD-VERSION>1.0.0</UD-VERSION>
</Portal-Version>
<QWeb-Version>
  <WEB-VERSION>10.7.0.0-1</WEB-VERSION>
  <SCANNER-VERSION>12.1.68-1</SCANNER-VERSION>
  <VULNSIGS-VERSION>2.5.84-2</VULNSIGS-VERSION>
</QWeb-Version>
</data>
</ServiceResponse>

```

Sample JSON

### API request

```

curl -u "USERNAME:PASSWORD" -X "GET" -H "Accept: application/json"
https://qualysapi.qualys.com/qps/rest/portal/version

```

### Response

```

{
  "ServiceResponse": {
    "data": [
      {
        "Portal-Version": {
          "PortalApplication-VERSION": "3.5.0.0-SNAPSHOT-1 DEVELOP #92
(2021-01-19T01:51:21Z)",
          "WAS-VERSION": "6.17.0.0-SNAPSHOT-32",
          "VM-VERSION": "1.0.3",
          "CM-VERSION": "1.20.1",
          "MDS-VERSION": "2.16.1.0-SNAPSHOT-2",
          "CA-VERSION": "2.9.1.0",
          "QUESTIONNAIRE-VERSION": "2.14.0.4",
          "WAF-VERSION": "2.12.6.0"

```

```
    },  
    ...  
    }  
  ],  
  "responseCode": "SUCCESS",  
  "count": 1  
}
```

## JSON Support

WAS API supports JSON requests and responses starting with WAS version 4.5. Samples are shown below.

### Sample 1 - Create an option profile

#### API request

```
cat createOP.json | curl -s -X POST -H "Accept: application/json" -H  
"Content-Type: application/json" -H "user: username" -H "password:  
passwd" -d @-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile/"
```

POST data:

```
{  
  "ServiceRequest": {  
    "data": {  
      "OptionProfile": {  
        "name": "OP creation - with json request and response",  
        "timeoutErrorThreshold": "10",  
        "unexpectedErrorThreshold": "20"  
      }  
    }  
  }  
}
```

#### JSON output

```
{  
  "ServiceResponse": {  
    "data": [  
      {  
        "OptionProfile": {  
          "id": 464134,  
          "formSubmission": "BOTH",  
          "owner": {  
            "lastName": "Smith",  
            "username": "username",  
            "firstName": "Steve",  
            "id": 4354  
          }  
        }  
      }  
    ]  
  }  
}
```

```
    },
    "createdBy": {
      "lastName": "Smith",
      "username": "username",
      "firstName": "Steve",
      "id": 4354
    },
    "tags": {
      "count": 0
    },
    "bruteforceOption": "MINIMAL",
    "updatedBy": {
      "lastName": "Smith",
      "username": "username",
      "firstName": "Steve",
      "id": 4354
    },
    "maxCrawlRequests": 300,
    "sensitiveContent": {
      "creditCardNumber": "false",
      "socialSecurityNumber": "false"
    },
    "updatedAt": "2015-12-15T13:39:25Z",
    "comments": {
      "count": 0
    },
    "createdAt": "2015-12-15T13:39:25Z",
    "parameterSet": {
      "name": "Initial Parameters",
      "id": 0
    },
    "isDefault": "false",
    "unexpectedErrorThreshold": 20,
    "performance": "LOW",
    "name": "OP creation - with json request and response",
    "ignoreBinaryFiles": "false",
    "timeoutErrorThreshold": 10
  }
},
],
"count": 1,
"responseCode": "SUCCESS"
}
```

## Sample 2 - Launch a scan

### API request

```
cat createOP.json | curl -s -X POST -H "Accept: application/json" -H "Content-Type: application/json" -H "user: username" -H "password: passwd" -d @-"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan/"
```

POST data:

```
{
  "ServiceRequest": {
    "data": {
      "WasScan": {
        "name": "WebApp Default Auth",
        "type": "VULNERABILITY",
        "target": {
          "webApp": { "id": "2640672" },
          "webAppAuthRecord": { "isDefault": "true" }
        },
        "cancelAfterNHours": "1",
        "profile": { "id": "450936" }
      }
    }
  }
}
```

### JSON output

```
{
  "ServiceResponse" : {
    "responseCode" : "SUCCESS",
    "data" : [ {
      "WasScan" : {
        "id" : 1498381
      }
    } ],
    "count" : 1
  }
}
```

## Sample 3 - Get a WAS scan

### API request

```
cat createOP.json | curl -s -X POST -H "Accept: application/json" -H
"Content-Type: application/json" -H "user: username" -H "password:
passwd" -d @-
"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan/"
```

POST data:

```
{
  "ServiceRequest": {
    "data": {
      "WasScan": {
        "name": "WebApp Default Auth",
        "type": "VULNERABILITY",
        "target": {
          "webApp": { "id": "2640672" },
          "webAppAuthRecord": { "isDefault": "true" }
        },
        "cancelAfterNHours": "1",
        "profile": { "id": "450936" }
      }
    }
  }
}
```

### JSON output

```
{
  "ServiceResponse" : {
    "responseCode" : "SUCCESS",
    "data" : [ {
      "WasScan" : {
        "id" : 1498381
      }
    } ],
    "count" : 1
  }
}
```

## Sample 3 - Search WAS Findings

### API request

```
cat createOP.json | curl -s -X POST -H "Accept: application/json" -H
"Content-Type:
```

```
application/json" -H "user: username" -H "password: passwd" -d @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/finding"
```

POST data:

```
{
  "ServiceRequest": {
    "preferences": {
      "verbose": "true",
      "limitResults": "10"
    },
    "filters": {
      "Criteria": {
        "field": "type",
        "operator": "EQUALS",
        "value": "VULNERABILITY"
      },
      "Criteria": {
        "field": "qid",
        "operator": "NOT EQUALS",
        "value": "0"
      }
    }
  }
}
```

## JSON output

```
{
  "ServiceResponse": {
    "count": 10,
    "hasMoreRecords": "true",
    "data": [
      {
        "Finding": {
          "severity": "2",
          "type": "SENSITIVE_CONTENT",
          "uniqueId": "77352a97-59ce-4001-bf50-7261ae7ae4a2",
          "firstDetectedDate": "2020-10-20T11:36:54Z",
          "lastTestedDate": "2020-10-25T08:19:44Z",
          "timesDetected": 5,
          "cwe": {
            "list": [
              201
            ]
          }
        }
      }
    ]
  }
}
```

```

        "count": 1
    },
    "webApp": {
        "name": "WAS -Everything with Additional XSS
payload",
        "tags": {
            "list": [
                {
                    "Tag": {
                        "id": 110000819,
                        "name": "500 webapps -VARUN"
                    }
                },
                {
                    "Tag": {
                        "id": 109988813,
                        "name": "50 webapps"
                    }
                },
                {
                    "Tag": {
                        "id": 110000815,
                        "name": "101 webapps -VARUN"
                    }
                },
                {
                    "Tag": {
                        "id": 110000817,
                        "name": "300 webapps -VARUN"
                    }
                },
                {
                    "Tag": {
                        "id": 110709415,
                        "name": "New tag1"
                    }
                },
                {
                    "Tag": {
                        "id": 110000813,
                        "name": "100 webapps -VARUN"
                    }
                },
                {
                    "Tag": {

```

```
        "id": 8753812,
        "name": "Multiscan"
    },
    {
        "Tag": {
            "id": 109966420,
            "name": "Test Varun"
        }
    },
    {
        "Tag": {
            "id": 109988212,
            "name": "200Webapps"
        }
    },
    {
        "Tag": {
            "id": 110000820,
            "name": "501 webapps -VARUN"
        }
    },
    {
        "Tag": {
            "id": 110000818,
            "name": "499 webapps -VARUN"
        }
    },
    {
        "Tag": {
            "id": 109966419,
            "name": "Varun"
        }
    },
    {
        "Tag": {
            "id": 110000814,
            "name": "99 webapps -VARUN"
        }
    },
    {
        "Tag": {
            "id": 110000816,
            "name": "200 webapps -VARUN"
        }
    }
}
```

```

    },
    ],
    "count": 14
  },
  "id": 5250283,
  "url": "https://10.11.72.37"
},
"isIgnored": "false",
"id": 120869,
"content": "12345",
"findingType": "QUALYS",
"resultList": {
  "list": [
    {
      "Result": {
        "ajax": "false",
        "authentication": "false",
        "payloads": {
          "list": [
            {
              "PayloadInstance": {
                "request": {
                  "link":
"https://10.11.72.37/boq/acct/other/ThisFormWillTimeOut.php",
                  "headers":
"UmVmZXJlcjogaHR0cHM6Ly8xMC4xMS43Mi4zNy8NCkNvb2tpZTogenF0aHBpa294cmRmb
WduY3V3YXZsewVzYmo9MTU4MTIyNjc3NC43MUYyOyB6bGNuZGJtZmthdGlnZ3FoZW92eHl
wc3JqdT0xNTgxMjI2NjkwLjUxNTM7IHppaHhyZWRxbGFrZm11Z29udmlidHl3cHNjPTE1O
DEyMjY4ODguNzIwNzsgemphY2l2bHBnb2R3cnVrcWhic3huZXRtZnk9MTU4MTIyNjgzOS4
3MTk10yB6Zmx2b25wZ2NtaGVrZG1hdXdq2J5cnh0cT0xNTgxMjI2NzQxLjcyMzU7IHpia
HVwa3NhZG54dG13Z2x5b3ZqZnJtZWxwPTE1ODEyMjY5MjcuNzIzNjsgemJjeG1mZ25ocmt
vdXZpbHdzcWR0ZXB5amE9MTU4MTIyNjc4My43MTC40yB6YXlyanRsZ3Brd3ZxY3ViZm5tc
2RveG1laD0xNTgxMjI2MzMLjQxNDE7IHphb3RqZW11bGhuc3BidmtkeHF3Z3ltcmZjPTE
1ODEyMjY3NTYuNzE1ODsgeXhvZXJmaGtpYnVjcWxkc3BndndqYW10bno9MTU4MTIyNjg3N
i43MjQ10yB5cWtvYnJkbmN2d2h1c3BtaWplbHp4YwdmdD0xNTgxMjI2ODA0LjcyODI7IHl
qY3JnemRxcXZdpbWJhbG9rcHVmeG52c2h0PTE1ODEyMjY4MjguNzE3MzsgewdtanRmb2Nia
3phbG53aWh1dnJleHNwclwQ9MTU4MTIyNjc1My43MTUyOyB4dWR2dGF1Zmdjam93bmxxc3p
iaW1oeXJrcD0xNTgxMjI2NzI2LjUxMzgzIHh0a2hueWN2dWZsb3NnaWpxYW11cmJwemR3P
TE1ODEyMjY3ODYuNzExNDsgeHNpaGJwdGtKjY29qd3VsZmVucnZhcXpnbXk9MTU4MTIyNjM
yNS4zMDUzOyB4cG9pbHVuYWJzZnllamNyd2hxemdKbWt0dj0xNTgxMjI2OTAYLjQxNDc7I
HhvZ3ZiZGhmZW1sanR6eXVuYWN3a2lxcnBzPTE1ODEyMjY4NzMuNzE1OTsgeGdhZWZzcm1
vemJ3aGp5ZHRsa3Bxdm11bmM9MTU4MTIyNjc0Ny43MTC7IHhkZnJlem9oZ2xqbnFwdWthY
3dpYnN0bXZ5PTE1ODEyMjY3NjUuNzIwMzsgGNuendocGVvdGFidm1xc2p1Zmt5ZGxyd2k
9MTU4MTIyNjg0NS40MjU10yB4Y2twZnVkanJncXdueXpsb3RidmFtZWVhpcz0xNTgxMjI2N
jk5LjUyMjU7IHhia251em1zb3RmbGFpaGd3ZWNqeXBxZHZyPTE1ODEyMjY5MjEuNzIyMTs

```

geGFmZGdidmxdGt5b2N1d251emhwcNxbWo9MTU4MTIyNjgXNi43MTkyOyB3cw1yYmZjZ  
WRsYW9udnppqCHNrZ2h0dXl4aT0xNTgxMjI2MzQ2LjMxODY7IHdvemh2a21sc2RncwVicmF  
pcHhjeXVqZm50PTE10DEyMjY3ODguNDMyMzsgd294dnpjdGtmc2dpZWhicWxkam1udXJ5c  
GE9MTU4MTIyNjg10C43MjE40yB3bHB4dWdbnbpkeXZl1aG1vaWJ0YwPjc3Fyaz0xNTgxMjI  
20DIxLjQzMzU7IHdpZnB1eGdjHJodmV5bWpsb3NiEMFrZG5xPTE10DEyMjY4NjkuNDI10  
Tsgd2Z2dHNxYnhnbmVsem95Y2lwaHJrYW1kdWo9MTU4MTIyNjc2MS40MDg40yB3ZmpjZ3V  
0dmFkaG96aXlscHJlbXFreGJzbj0xNTgxMjI2MzM3LjMyMTc7IHdjZm10dWRib2tyewl1Y  
XpqnBobGdzCzhuPTE10DEyMjY4NDguNDI10yB2emV5cGluYXF1d2Jvcmttc2dqeHRsaGN  
kZj0xNTgxMjI20DQyLjQzODY7IHZmZ25tanhkZWF5em9ocXNpcHRiY3V3bHJrPTE10DEyM  
jY3MzQuNDA50DsgdXhtZ3pyY3BmaGVqYXl2ZG9saXduYmtzdHE9MTU4MTIyNjM0S4zMDY  
7IHV4aGxud3Z0aWFqc2diY3plbWZ5cWRwb2tyPTE10DEyMjY2NzEuNDE2NTsgdWtzaXBle  
XRhd25qdmhnY2Z6cWRscm14Ym89MTU4MTIyNjcxMy40MTc10yB1aGtnY2ZsenZzcm5qbW9  
hd2l5YnhxdGVkcD0xNTgxMjI2MzQxLjQyOyB0em1ldmd5dXFzYXJjaHdkeGxpb2Zqa2Jwb  
j0xNTgxMjI20DM2LjQyMDY7IHR6bHNpcnhraGpkcWV3bnZwY2ZtYwvdvWJ5PTE10DEyMjY  
3MzIuNTEyOTsgdHZocWlNbHVqb2V6YXhycG15ZHNrZmNibnc9MTU4MTIyNjc4NS40NDQxO  
yB0dmNqaHl1tYXhpcnFrZGdlenVuYnBzd2Zsbz0xNTgxMjI20Dg1LjcyMzMTIHR1d25zZGx  
jcGVtb2d4cXZoawpyemZheWtiPTE10DEyMjYzYmJiUzEYNTsgdG9haGNxbWRiemx3bnhyZ  
XlnaWZranN1dnA9MTU4MTIyNjgzNy43MjA10yB0bXNhb252aWR6ZWJ3cmNncHhqZn11bGt  
ocT0xNTgxMjI2NzAxLjQxNDk7IHRtaXl1d2dxcHV5Y296a2JqZGZ4cm5odmFzPTE10DEyM  
jY3MjkuNTE2NDsgdGxzemJwZG5hd2Nmam1rdXZ4eXJxZW1ob2c9MTU4MTIyNjc30S40MjQ  
yOyB0Y2RmbHJuz3h5cW1oaXNiYwPvdXp2Z2Wtdwz0xNTgxMjI20TI5LjQyMTk7IHRiamNxZ  
WRsdWZybXZpZ3h5b3duemFraHNwPTE10DEyMjYzMTQuNDEyOyB0YmlyendxZGFqc3V5b2x  
nZXZwa2NoZnhtbj0xNTgxMjI20DA2LjQyMjU7IHN4a252Z2VobW9pemp5dXFybGZjcGF3Z  
HRiPTE10DEyMjY5MjMuNDEyMjsgc3Vrbm1hYnBjZ2VscWl5ZHhmaHR6cmp3b3Y9MTU4MTI  
yNjg3Mi40MjU7IHNwanRya3hpd2x5YnVxbmN2Z2V6Yw1kZmhvPTE10DEyMjY3NzEuNzIxM  
jsgc2t4YXRl1aHZuZHd5cWppYmZsbWV3VwenI9MTU4MTIyNjc2Mi43MTEyOyBza2hmeXV  
pZGdtcGJ3bnpjdHhxb2VhbHJ2ej0xNTgxMjI20Dk5LjQxMzI7IHNpZ2Rub211ZnhjanFod  
mV0a3dheXBienJsPTE10DEyMjY5MTguNzI3Njsgc2hrcW9sYm1kdnhubWp5cGFld3p0Z2Z  
jdXI9MTU4MTIyNjY3NS41MjQ0yBzZ2Z6a3RqcWRpY3B2bGF3aHVyew54ZW1ibz0xNTgxM  
jI2NzQ0LjcyMTc7IHNmcndwbW52ZGNvamV1aGJ6eGxxa2d5aXRhPTE10DEyMjY20TYuNTE  
50TsgcnRpY2ZkbWVxan12Z3N3YW5rYmhvdXpseHA9MTU4MTIyNjc3Ni40MjI0yBydGJ3Z  
mR4bWtpemdhcG9lcw5qdnN5aHVsYz0xNTgxMjI20TM2LjcyMDY7IHJvamJ0cWxoeb2ew5  
jZHhrZ3d1ZWlhZnNtPTE10DEyMjY3NTkuNzEyNjsgcm5jaWVoendncWF0cHZ4YnNqZGZvb  
GttDk9MTU4MTIyNjg1Mi43MTQzOyBya3RsY21vYXNpeXBndXFizWZ2aHp3bnhkaaj0xNTg  
xMjI20DEwLjcxMTU7IHJqc2x1cGdvbmFtcWJjdGR6aHhrdm13ZmV5PTE10DEyMjY4MjIuN  
zMxNjsgcmdtemZqYmNxeXZzaG9pcHVseHR1bmFkd2s9MTU4MTIyNjg5MS43MTg10yBxeXp  
0bnNpdW9ld2J2cGhrZHhbwWdmcnqbd0xNTgxMjI20DQzLjcyODI7IHFzam1sb3lybmb0e  
Gt2dWZ6ZGJhd3BpZ2N1PTE10DEyMjY3MzEuNDIxMzsgcXNhcmtubGppZXVib3hjZ3loZGZ  
2em10cHc9MTU4MTIyNjcwMi41MTI5OyBxbmJmaXRrZGV3dXBzZ3Z6bHJtaHl4amNvYT0xN  
TgxMjI20TQxLjQyNDg7IHFrc2V0b2FoZ2NqbH16d3htbmRycG12ZmJ1PTE10DEyMjY3NTU  
uNDIxNTsgcWlseWtdnpuCnBzdGFod2Nqb2dkZXVibXg9MTU4MTIyNjY3Ny40MTM7IHFoZ  
mtsdmRqb2Nyc2d1Ym1leXd0eG1henBuPTE10DEyMjY3NTguNDEwMzsgcWZ1c3lncmluaGR  
hb3pqbhZjd2ttZWJwdHg9MTU4MTIyNjY4Ni40MTk30yBxZm9zdWV5amJ3bGtjbWlhcnh2Z  
GhuenB0Zz0xNTgxMjI20TMwLjcyMjQ7IHFid2lodWFyanhnem1ucGVsa2Nkb3NmdHl2PTE  
10DEyMjY4NDAuNzIwMzsgcWJsZ3pmc3VydnB4YwpoZG9rdG1td2N1ew49MTU4MTIyNjczN

S41MTAxOyBweHpuw9xcnNidGthZW1kdmNmaXVnbHdoaj0xNTgxMjI2MzE3LjQyMDM7IHBzZ2JpeWVqcXJvbGNmZHd1dnprdHhtaG5hPTE10DEyMjY5MTQuNDI2NTsgcGx2c2hvZmVtdHV6a2dyewJ4cWR3Y2Fpbmo9MTU4MTIyNjg3OS43MTQ7IHB1Y25kcm1xeHdic2pmdmdhbHp5b3Voa3RpPTE10DEyMjY2NzguNTE4MzsgcGNyeGh6b2J2a3dtdXN5cWRpdGFubGplZmc9MTU4MTIyNjY4MS41MTM0OyBvcnh1YwpjbHZmZW13dG56awRlc3FraGd5cD0xNTgxMjI2OTA1LjQyNDE7IG9ycXRhZWh2dWlrem5wbGZ3YmNneHN5am1kPTE10DEyMjY3ODkuNzMwNDsgb25qbXd5dGJzZHh1ZmhjenBydXFpa2xnYXY9MTU4MTIyNjg3NS40MTM4OyBvbWhkYnZ4dX16ZWp3aXFuc2d0Y2xrcGFyZj0xNTgxMjI2NzY3LjQxODQ7IG9qcWJ3Z2R5enBjaHhhdG1ubHZzbWt1ZWZyPTE10DEyMjY2ODQuNTEyNjsgb21ldnRrend4Ymdqbm1ycGNkeXVxbGhzYWY9MTU4MTIyNjY3NC40MTQzOyBudWZ5bHdxZ2NicHRkaXZob3NqeHJtYWtlej0xNTgxMjI20TAzLjcyNTU7IG50dnJrbHFlem15Z3dmZGFpY3VicGp4b3NoPTE10DEyMjY5MDkuNzI2NDsgbm12Y3RyZGJod2pvcw1reWx6cHVzZ2VhZng9MTU4MTIyNjgwNy43NjM1OyBuaXlrZHZiYW9xd2N0aHpybXB1Zmxqc2dleD0xNTgxMjI2ODU3LjQxMTk7IG5pZm9zZ2NkanFwdmJ3a316YWVsdWhybXR4PTE10DEyMjY4MDEuNzE4NTsgbmV3anBybH16bWhiZmN0c2dva3VpYXZkeHE9MTU4MTIyNjY3NC40MTQ5OyBuZGFieGpzcwXjZn13b2V1dHBncnpoaw1rdj0xNTgxMjI20DM5LjQxODI7IG5jcmto2d1bGV0enFkeHZtd3NpewZqYwJwPTE10DEyMjY4ODEuNDIxNDsgbmJ2cWFlawd4b2RwbGZremNzdwp5d3JobXQ9MTU4MTIyNjg4NC40MjAzOyBteWRoY2dpZXBzYXZ0anhxbGZid3pvbnVyaz0xNTgxMjI2NzgwLjcyMjY7IG1xd2R5ZnJ2bnNhcGx4am9pdWJ6a2d0Y2h1PTE10DEyMjY2ODAuNDIxNDsgbW5nZWRrcmpjb2JzaH1hcXhwemx2dG11Znc9MTU4MTIyNjg2Ny43Mjg5OyBtZn11eGRoc3R3a2dqY3BhcWJ1b3Jsem12bj0xNTgxMjI2NzQ2LjQyMTI7IG1jcHdsbnV5ZmJyZ2Vqc212cXhhZGt6aG90PTE10DEyMjY4NjAuNDIwNTsgbWJpcG51bHV3YXRka2pmcw9yc3Z5eHpnY2g9MTU4MTIyNjkyNC43MTQ30yBsc3ZxeXp1bm11ZHJwa2N4Z2FvaHR3aWJqZj0xNTgxMjI2MzE5LjMyMDU7IGxycXp2bXd1Yw4YnRkbmhva2N5ZnVpcGpzPTE10DEyMjY3NTAuNzE2MzsgbG9ncGJ6anJhcWRodGluZX12c2ttZnh1d2M9MTU4MTIyNjgzNS40MjgyOyBsZ2p5bWF0c3duaGtjYmZyeGRwdW9lem1xdj0xNTgxMjI2ODY0LjcxOTQ7IGxnaXp2eWVhZHh0c29jdWJxbmtocnB3ZmptPTE10DEyMjY5MDguNDQwMjsga3dmbGJuemhxewV4ZG9hcGpzdw10dmdpcm9MTU4MTIyNjMxNi4zMTE15OyBrdG1ocnVpdmRqcWVjeHpsYnB5Zmdhd29ucz0xNTgxMjI2ODgyLjcyMjE7IGtYeXdsaHNncHVxenZ4ZWRtYwJqb21jZnRuPTE10DEyMjY4MTIuNDE3OTsga3BtYnpsamF2d3VyY3NoeG5kcWdpdGZ5b2U9MTU4MTIyNjg5Ni40MjM1OyBrbG9odGR3emZneH1laW5jc3J2Ym1hanVwcT0xNTgxMjI2NzgyLjQxMjk7IGtqeHVvaWxuY29ncnZ0eXdiZWFzaGRxbWZ6PTE10DEyMjYzMTMuMzIwOTsganpidHB5dwtvY2hscmV2ZnFpeG5kYw1nc3c9MTU4MTIyNjMyOS40MjA4OyBqeHRyYm1vcWZ1Y3VkeW52YXNnem1scGt3aD0xNTgxMjI2ODI3LjQxNDsganhhc255Z3Rpb3ZicmNldW1ka3pxZndsaha9MTU4MTIyNjcwNy40MjAxOyBqdm9tcmZweWFsZXN4emducWh3aWNidWRrdD0xNTgxMjI2NzczLjQyMzc7IGpycHhnenFlldmF0Zm51aX1kaG1vc3drbGJjPTE10DEyMjY4NzAuNzE5MjsganFvY311aXJlc2x6bWZ2bnhna2hhcHdkYnQ9MTU4MTIyNjkwM43MjE0OyBqcGJhbXV4ZHF2aWZzemd5bmt0aGNsZW93cj0xNTgxMjI2NjgzLjQyOyBqYw12ZWxncmhpZHhmeXVrdHduc2JjcXB6bz0xNTgxMjI20TMyLjQxOTE7IG13c21sdw9oZ3FyeXh6amZkYXR2Y3B1a25iPTE10DEyMjY3NDAuNDA3NTsgaXZhd2x6ew5oZ2pyZnRja294bWJzcGR1cWU9MTU4MTIyNjMzMS4zMjM5OyBpdXNtb2VwY3lyYWh4enRnbHdmam52cWRiaz0xNTgxMjI2Njg3LjUxMTM7IG10d2Rzdmpja2dmbnJ1eXB6Ymx1b2h4YW1xPTE10DEyMjY3NjguNzIxMzsgaXJ4dmRqd2ZjYnB1b3N5a3FndXptdGFsaG49MTU4MTIyNjgyNS43MTk4OyBpb2Vta3libGFuZnNxcmpjdnV6cHd4aGRndD0xNTgxMjI2NzM3LjQzNDM7IG1ub2pwZ31jcmhmbGJha3h0dnFtZHVlenN3PTE10DEyMjY20TUuNDA1OyBpZGtdG5mYXJsd21jYmhveH1wemd2ZXFzdT0xNTgxMjI2Nzk3LjQyNjg7IG1jZG11cnF6c3ZnZmV3a2xqYm5wYX1vaHh0PTE

10DEyMjY20DkuNDE3NjsgaHvmZHp3dGdueGJ5ZWFjAw9rcHFzbHJtdmo9MTU4MTIyNjY5M  
y41MDg10yBodHZtbGtjemFuanl4awZ1Z2Vyd3FwYmRvcz0xNTgxMjI2NzUyLjQyMjI7IGh  
xcG9iY21ya2Rpc3dleHZnZnp5bmp0Ywx1PTE10DEyMjYxOTYUNDE4NzsgaG9uZ2Jzd2lme  
HV5dmNsamFwZXJ6bXRka3E9MTU4MTIyNjcxNy41MDc30yBobmNmYn12dHJ6Z2tkYWxqb2V  
zdXhxcG1tdz0xNTgxMjI2MzQzLjMyMDM7IGhtcXZ1Ynhhc3JmewlscHpqdw5jb2d0a3dkP  
TE10DEyMjY3NDMuNDE2NDsgaGpuc3J4bXZ5ZGxndGJraXphdWV3cGNmcw89MTU4MTIyNjcx  
x0S40Mjgz0yBoawtwbW5hZmN5dWVqcndHFsc29iend2ZD0xNTgxMjI2NzA4LjUxMDE7I  
Ghla2Z1amRzaXRjbXB4Z25sb3F5d3phYnJ2PTE10DEyMjY3MzguNjI30yBoY3B0dmtuZ3J  
zZXV6b2l5d3F4YWpiZG1sZj0xNTgxMjI20DAwLjQyNDY7IGd1dn14cHNrZHR3cm5iem1sY  
2F1aG9qZmlxPTE10DEyMjY3NzAuNDE0TsgZ3J0Y25xeHltYWZ6b2xzd2tqZGVpYmhwdu  
9MTU4MTIyNjg0S43MjY50yBncXJuZGNldHpqew14bGh2YnNwYwlvZnd1az0xNTgxMjI20  
DEzLjcyMDM7IGdxYnRlc2xpdWhqew1vY25weGZ2a2R6d2FyPTE10DEyMjY3NjQuNDA3Mzs  
gZ2t1ZmRodGF4dXpiaWpsdm1veXJjbnFzd3A9MTU4MTIyNjM0Ny40MTc0OyBnanJlc2R5Y  
Wh4Ymxja216dw53ZnRpcHFvdj0xNTgxMjI2NzA0LjQyODM7IGdja2FmcwJzbGhydW13dnR  
ub3B4ZHp1anlpPTE10DEyMjY4MzAuNDEyOTsgZnppnaW5kbHZldWFodHhhd3Btcn1rcWpjY  
m89MTU4MTIyNjg0C40MTUz0yBmd2h6amRzdHBjYm9rbH12bnFtdWFlaxJ4Zz0xNTgxMjI  
20DAzLjQzMz7IGZ2ZHBiandzcm50bWx6eXhvaWdrYWhxY2V1PTE10DEyMjY2NjkuNTEExN  
TsgZnVnbnJwY2hsend0YmtvYXNxdnhtan1lZGk9MTU4MTIyNjg5MC40Mjc10yBmdWNlcXN  
teXJsZ3BoeGJpd3Z0bmRvYwtqej0xNTgxMjI2MzQwLjMzNDE7IGZ0ZWF3eXZwanptaWJrZ  
GNyc3VvZ2hseG5xPTE10DEyMjY30TEuNDE4MTsgZnJobXhxY3lkdXd2Ymdpc3BrbG5qZXp  
0Yw89MTU4MTIyNjcwNS41MjU20yBmbmdzYmpkYXFld3B4bWt6bGN2b3locml0dT0xNTgxM  
jI20DE5Ljcx0Dc7IGZta3h6d29iamRpZXVxdnJnbGNzcHRhbnloPTE10DEyMjY30TUuNzE  
40yBmbGpxdnp3b3hoawFlc3l0Z2JubWN1a3ByZD0xNTgxMjI2Mz4LjQxMTc7IGZramhsZ  
Hp3cHJheXN2eG90Y21udXFiz2VpPTE10DEyMjYzNDQuNDE4NzsgZmp0ZXJxbHVpY2tvYnN  
hdndocHhueW1nemQ9MTU4MTIyNjg0Ni43MTY50yBmaXVvZWpxY2RoZ2JzcHJudG12bH16d  
3hrYT0xNTgxMjI20TMzLjcyMTM7IGZobnppcGJsYXJlc2N4dnVrZHdqeXRvZ21xPTE10DE  
yMjY4MDkuNDIzNzsgZmRyc2VpcWtobXh2eWxnd3B1bnRqYnphY289MTU4MTIyNjcxNy40M  
jk30yB1cWhyanRzbWFlkaWnsdmJwbnpva2d5dXdmeD0xNTgxMjI2NzEwLjQwODg7IGVuYmZ  
yaHlwemRxdmxtY3Vrd3hzYwlnanRvPTE10DEyMjY3MjguNDIxOTsgZW1nd2xqaWtuYXJ5Z  
mR2cXBjenVzdHhob2I9MTU4MTIyNjY50C40MTQz0yBlZGhmcnNjanBtemxiYXd5aXZueHV  
rb3F0Zz0xNTgxMjI20TI2LjQxMTI7IGViYXVqenZwZG9obWNneG1xcnd0bGtuZnN5PTE10  
DEyMjY30TQuNDE50TsgZWF6anF3dwh4bmd2Y2RzewlyYmtvbGZtdHA9MTU4MTIyNjM1MC4  
0MTc30yBlYWR4aXNjZ3p3dnltZmJrcXBqcmhudWx0bz0xNTgxMjI2Nzk4LjcyMTM7IGR4a  
25wbXZqewJvdGVxdWFpbGNyc3doZ2Z6PTE10DEyMjYzYmYyNDI1MjsgZH43l0dWZtcnp  
vdGVicGNnandxbG5rYwk9MTU4MTIyNjg1NC40MTIy0yBkdnV5cXhocmlrYw1wdGdzam91Y  
ndjZmx6bj0xNTgxMjI20DYzLjQxNjg7IGR2dGhjZWZyew9pamxzcg5hdWtxd3htemJnPTE  
10DEyMjY3NzcuNzMwNzsgZGtlanZtenJnaGZ5Y250dWlid3BsYXhvcXM9MTU4MTIyNjMyM  
C40MjM20yBkZ3h6c3dxYnVsbWh0Zmp2ZWlub3lja3JwYT0xNTgxMjI20TA2LjcyMzU7IGR  
menhyewduanBzbG9pZWF3dGJ1a3FjaG12PTE10DEyMjY4MzEuNzE2NDsgZGZ6aGFpeXFzZ  
W1nbGJyb3dqeHZudGtwY3U9MTU4MTIyNjcyMC41MTYy0yBkZnR2bn1jbGprZXhvc211YnB  
yaWh6YwD3cT0xNTgxMjI2MzMyLjQyMTk7IGN4Z2VqYnZ1cXpud3JkYWhsb210eXBzaWtmP  
TE10DEyMjY3MTEuNTA5NjsgY3ZpdW5xa2JqcH13dGdlZGxmenhobWZcm89MTU4MTIyNjM  
y0C4zMDgz0yBjdXNhcG16eGRueW92aHJxd2JmdGpsZWtpZz0xNTgxMjI20DUxLjQzMjQ7I  
GNvb2tpZTM9Y29va21ldGhyZWU7IGNvb2tpZTI9Y29va21ldHdv0yBjb29rawUXPWNvb2t  
pZW9uZTsgY29neG5qcm10bwh6bGJldnN1YWR5cHdrZnE9MTU4MTIyNjY3Mi41MDY7IGNuc

```

XdwaWJzemVkdmx5amZrdHJJoeGFvbWd1PTE10DEyMjY40DcuNDE40DsgY2txemFvZndyaXh
qbm1weWJ1dmhsZWR0c2c9MTU4MTIyNjg30C40MTMzOyBjanV4c2h5YW1wdHJ3bGdmYnFuZ
W9raXpkdj0xNTgxMjI2ODMzLjQyNTsgY215YmFrbGVvcXN3cmh6dHZqeGZkbXBudWc9MTU
4MTIyNjg5Ny43MTY0OyBjZGhqC2ducGlydXlmZWxvbwJhdHhrcXZ3ej0xNTgxMjI2OTIwL
jQxNDE7IGNkZ3B5c211Zm5heHpybHZpb2hrYnR3ZWpxPTE10DEyMjY5MzguNDI2MzsgYnZ
3bnhlamtWYwZjcnFkew10c2xpdW9nemg9MTU4MTIyNjgxNS40MTgzOyBibmp5dmZsc2hwZ
HRvZXpha3d4cm1ndWNxaT0xNTgxMjI2MzM0LjMyMjQ7IGJscmpxb2R3Y3RudmF1cHpoeGt
nZW1pc3lmPTE10DEyMjY5MTUuNzE5NzsgYmpkdXFvcGtnZWZheHlpbnZtdHNyaGx6d2M9M
TU4MTIyNjKxMS40Mjc4OyBiaW5xbG10Z2thZHBjewZ6anVyeHZvaHdlcz0xNTgxMjI2ODk
zLjQyOTI7IGJobHJveWVqbnpmY3dzaWtxYXVwbWd0dmR4PTE10DEyMjY4NjYuNDI4MjsgY
mhnaXB4ew5jZmFsZXR3dmRxb21renVzcmo9MTU4MTIyNjY5Mi40MTYzOyBiaGZycHpranz
5cw5zaXdkZ3Rh2VjbXhsdT0xNTgxMjI2ODk0LjcxNzsgYXZ4c2p3bHBnYmljZWhtdG5ve
nVkcWZ5cms9MTU4MTIyNjc5Mi43MTg3OyBhdWxieG9pbnl0a2h6andxY2dlcGZzbXZyZD0
xNTgxMjI2NzE0LjUxMjQ7IGF0dXdic3BmY2pvbWx4bmVyaXpka3ZocXlnPTE10DEyMjY3M
jMuNTE4MjsgYXNtd3RveHpxa3BoaWw1cmJsZm5kdmdqewU9MTU4MTIyNjg1NS43MTM7IGF
yeHNocWxkd25iZW92enlma2NwZ3VpdG1qPTE10DEyMjY4NjEuNzIwNTsgYWtwZ2N1emRme
GhlanJ5Ym13c21xbHRudm89MTU4MTIyNjKxMi43MTk5OyBha2Ztcwllb3JkeGx6dmJwd3V
0Z2NueWhqcZ0xNTgxMjI2NzE2LjQxNjQ7IGFpa2p6bnh3bWZkYmh2Z3lzb2VycXRscGN1P
TE10DEyMjYzMjMuNDE3NjsgYWVndm9weHRubXJqcWxjZHN3Zmt5aG11emI9MTU4MTIyNjc
yNS40MjMzOyBhZHJzd2tvZmh2cG1xbHhiZ2V6ewN1bm1qdD0xNTgxMjI2NzIyLjQxNDg7I
GFkZmJqaHBudHdpY2dzcnp2bXlrdW9xbGV4PTE10DEyMjY4MzQuNzEyMzsgYWwNmc3ZuZ2J
wenVraHhdHdsZGVqcnlxaw09MTU4MTIyNjgyNC40MzUyOyBQSFbTRVNTSUQ9NTEwOWE3N
zJiMwMzNjg2ZDBlM2UwN2JiM2Y2ZWJlNzU7DQpIb3N00iAxMC4xMS43Mi4zNw0KVXNlci1
BZ2VudDogTW96aWxsYS81LjAgKE1hY2ludG9zaDsgSW50ZWwgTWFjIE9TIFggMTBfMTRfN
SkgQXBwbGVXZWJLaXQvNjA1LjEuMTUgKEtIVE1MLCBsaWt1IEdlY2tvKSBWZXJzaW9uLzE
yLjEuMSBTYWZhcmlkbnNjA1LjEuMTUNCkFjY2VwdDogKi8qdQo=",
"method":
"GET"
},
"response":
"<html><head>\n          <title>This Form Will Timeout</title>\n
  </head>\n    <body>\n          <form method=\"POST\">\n
    Search: <input type=\"text\" name=\"search\"
value=\"12345\">\n          <input type=\"submit\" name=\"submit\"
value=\"submit\">\n          </form>\n    \n\n</body></html>",
"payload": "12345"
}
}
],
"count": 1
}
},
"count": 1

```

```

    },
    "wasc": {
      "list": [
        {
          "WASC": {
            "url":
"http://projects.webappsec.org/w/page/13246936/WASC",
            "name": "INFORMATION LEAKAGE",
            "code": 13
          }
        }
      ],
      "count": 1
    },
    "qid": 150016,
    "name": "Sensitive Content In HTML",
    "potential": "false",
    "owasp": {
      "list": [
        {
          "OWASP": {
            "name": "Sensitive Data Exposure",
            "url":
"https://www.owasp.org/index.php/Top_10-2017_A3-
Sensitive_Data_Exposure",
            "code": 3
          }
        }
      ],
      "count": 1
    },
    "url":
"https://10.11.72.37/boq/acct/other/ThisFormWillTimeOut.php",
    "lastDetectedDate": "2020-10-25T08:19:44Z",
    "status": "ACTIVE"
  }
},
"responseCode": "SUCCESS",
"lastId": 240616
}
}

```

# Web Applications

## Web Application Count

`/qps/rest/3.0/count/was/webapp`

[GET] [POST]

Returns the total number of web applications in the user's account. Input elements are optional and are used to filter the number of web applications included in the count.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The count includes web applications in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click [here](#) for descriptions of <WebApp> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) Web application ID.
name	(text) Web application name.
url	(text) The URL of web application.
tags.name	(text) Tag name assigned to web application.
tags.id	(integer) Tag ID assigned to web application.
createdDate	(date) The date when the web application was created

in WAS, in UTC date/time format.

**updatedAt** (date) The date when the web application was last updated in WAS, in UTC date/time format.

**isScheduled** (boolean) A flag indicating whether a scan is scheduled for web application.

**isScanned** (boolean) A flag indicating whether the web application has been scanned.

**lastScan.status** (keyword) Scan status reported by last web application scan: SUBMITTED, RUNNING, FINISHED, TIME\_LIMIT\_EXCEEDED, SCAN\_NOT\_LAUNCHED, SCANNER\_NOT\_AVAILABLE, ERROR or CANCELED

**lastScan.date** (date) Date when web application was last scanned, in UTC date/time format.

## Sample - Get count of web apps, all in user's account

### API request

```
curl -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/webapp"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/webapp.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>227</count>  
</ServiceResponse>
```

## Sample - Get count of web apps in ID range

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/webapp" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="id" operator="IN">323126,323816</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/webapp.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>0</count>  
</ServiceResponse>
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd)/qps/xsd/3.0/was/webapp.xsd

## Search Web Application

/qps/rest/3.0/search/was/webapp

[POST]

Returns a list of web applications which are in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes web applications in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements.

The special field=attributes attribute for the Criteria element is used to search custom attributes (see sample below).

[Click here for available operators](#)

Parameter	Description
id	(integer) Web application ID.
name	(text) Web application name.
url	(text) The URL of web application.
tags	(element) Tags assigned to web application. Click here for description of this <WebApp> element
tags.name	(text) Tag name assigned to web application.
tags.id	(integer) Tag ID assigned to web application.

createdDate	(date) The date when the web application was created in WAS, in UTC date/time format.
updatedAt	(date) The date when the web application was last updated in WAS, in UTC date/time format.
isScheduled	(boolean) A flag indicating whether a scan is scheduled for web application.
isScanned	(boolean) A flag indicating whether the web application has been scanned.
lastScan.status	(keyword) Scan status reported by last web application scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR or CANCELED
lastScan.date	(date) Date when web application was last scanned, in UTC date/time format.
verbose	<p>(boolean) A flag to indicate whether the list of tags associated with the web application should be listed or not.</p> <p>Example:</p> <pre>&lt;preferences&gt;   &lt;verbose&gt;true&lt;/verbose&gt; &lt;/preferences&gt;</pre>

## Sample - List all web apps in user's account

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml"
  "https://qualysapi.qualys.com/qps/rest/3.0/search/was/webapp" -X
  "POST"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <hasMoreRecords>false</hasMoreRecords>
  <lastId>323103</lastId>
  <data>
    <WebApp>
      <id>323102</id>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[https://example.com]]></url>
      <owner>
        <id>123068</id>
      </owner>
      <tags>
        <count>3</count>
      </tags>
      <createdDate>2017-11-22T13:48:03Z</createdDate>
      <updatedAt>2018-09-19T13:41:07Z</updatedAt>
    </WebApp>
    <WebApp>
      <id>323103</id>
      <name><![CDATA[Demo Web App]]></name>
      <url><![CDATA[http://10.10.26.200:80/phpBB/1.4.4_basic]]></url>
      <owner>
        <id>123071</id>
      </owner>
      <tags>
        <count>0</count>
      </tags>
      <createdDate>2018-06-22T13:45:46Z</createdDate>
      <updatedAt>2018-09-16T14:33:38Z</updatedAt>
    </WebApp>
  </data>
</ServiceResponse>
```

## Sample - List certain web apps

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
```

```
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/webapp" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="name" operator="CONTAINS">Merchant</Criteria>
    <Criteria field="id" operator="GREATER">323000</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WebApp>
      <id>323476</id>
      <name><![CDATA[Merchant site 1]]></name>
      <url><![CDATA[http://10.10.25.116:80/merchant/2.2/themerchant]]>
</url>
      <owner>
        <id>123056</id>
      </owner>
      <tags>
        <count>0</count>
      </tags>
      <createdDate>2018-02-21T15:24:49Z</createdDate>
      <updatedDate>2018-07-03T16:53:37Z</updatedDate>
    </WebApp>
  </data>
</ServiceResponse>
```

## Sample - Search Web Application and view associated tags

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/webapp" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <preferences>
    <verbose>>true</verbose>
  </preferences>
  <filters>
    <Criteria field="name" operator="CONTAINS">My Web
Application</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WebApp>
      <id>6620298</id>
      <name>
        <![CDATA[My Web Application]]>
      </name>
      <url>
        <![CDATA[http://www.example.com]]>
      </url>
      <owner>
        <id>1056860</id>
      </owner>
      <tags>
        <count>1</count>
        <list>
          <Tag>
            <id>9029017</id>
            <name>
```

```

        <![CDATA[TagWebapp1]]>
        </name>
    </Tag>
</list>
</tags>
<createdDate>2017-12-15T16:13:06Z</createdDate>
<updatedDate>2018-11-19T04:38:08Z</updatedDate>
</WebApp>
</data>
</ServiceResponse>

```

## Sample - Search custom attributes

Search custom attributes using the field attribute for the Criteria element.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/webapp" <
file.xml

```

Note: "file.xml" contains the request POST data.

Find web applications that have a custom attribute name "Function" and this attribute has a value that contains "web" (case insensitive search).

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="attributes" name="Function"
operator="CONTAINS">web</Criteria>
  </filters>
</ServiceRequest>

```

Find web applications that have a custom attribute name "Function" and this attribute has a value that is equal to "web".

### Request POST data (EQUALS)

```

<ServiceRequest>
  <filters>

```

```
<Criteria field="attributes" name="Function"
operator="EQUALS">web</Criteria>
</filters>
</ServiceRequest>
```

Find web applications that have a custom attribute name “Function” and this attribute has a value not equal to “web”.

### Request POST data (NOT EQUALS)

```
<ServiceRequest>
  <filters>
    <Criteria field="attributes" name="Function" operator="NOT
EQUALS">web</Criteria>
  </filters>
</ServiceRequest>
```

### XSD

[<platform API server>/qps/xsd/3.0/was/webapp.xsd](#)

## Get Web Application Details

/qps/rest/3.0/get/was/webapp/<id>

[GET]

Returns details for a web application which is in the user's scope. Want to find a web application ID to use as input? See [Search Web applications](#).

The web application screenshot, when available, is included in the output in the "screenshot" element as a base64 encoded binary string. This string needs to be converted before a user can decode and view the image file (.jpg).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes web applications in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies a web application.

[Click here for available operators](#)

### Samples

[View details for the web application](#)


[Get details - DNS override settings](#)

[Get details - logout regular expression list](#)

[View default authentication record details](#)

[Get details - Selenium crawl script](#)

[Get details of a progressive scan](#)



**Sample - View details for the web application**

Let us view details for the web application with the ID 2130421.

**API request**

```
curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webapp/2130421"
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>2130421</id>
      <name><![CDATA[CUSTOM PARAM TEST]]></name>
      <url><![CDATA
[http://funkytown.abcd01.abcd.com/Forms/FormFields/temp/]]></url>
      <os>Linux 2.4-2.6 / Embedded Device / F5 Networks Big-IP / Linux
2.6</os>
      <owner>
        <id>4354</id>
        <username>user_alex</username>
        <firstName><![CDATA[Alex]]></firstName>
        <lastName><![CDATA[Smith]]></lastName>
      </owner>
      <scope>ALL</scope>
      <attributes>
        <count>0</count>
      </attributes>
      <defaultProfile>
        <id>139359</id>
        <name><![CDATA[10 Links edit]]></name>
      </defaultProfile>
      <defaultScanner>
        <type>EXTERNAL</type>
      </defaultScanner>
      <scannerLocked>>false</scannerLocked>
      <urlBlacklist>
        <count>0</count>
```

```
</urlBlacklist>
<urlWhitelist>
  <count>0</count>
</urlWhitelist>
<postDataBlacklist>
  <count>0</count>
</postDataBlacklist>
<authRecords>
  <count>1</count>
  <list>
    <WebAppAuthRecord>
      <id>127357</id>
      <name><![CDATA[AR - funkytown]]></name>
    </WebAppAuthRecord>
  </list>
</authRecords>
<useRobots>IGNORE</useRobots>
<useSitemap>>false</useSitemap>
<malwareMonitoring>>true</malwareMonitoring>
<malwareNotification>>true</malwareNotification>
<malwareScheduling>
  <startDate>2017-03-03T09:50:00Z</startDate>
  <timeZone>
    <code>Asia/Kolkata</code>
    <offset>+05:30</offset>
  </timeZone>
  <occurrenceType>MONTHLY</occurrenceType>
  <occurrence>
    <monthlyOccurrence>
      <monthlyType>
        <occurDayOrderInMonth>
          <dayOrder>FIRST</dayOrder>
          <dayOfMonth>THURSDAY</dayOfMonth>
          <everyNMonths>1</everyNMonths>
        </occurDayOrderInMonth>
      </monthlyType>
      <occurrenceCount>4</occurrenceCount>
    </monthlyOccurrence>
  </occurrence>
</malwareScheduling>
<tags>
  <count>4</count>
  <list>
    <Tag>
      <id>1730872</id>
```

```

    <name><![CDATA[new tag]]></name>
  </Tag>
  <Tag>
    <id>1418973</id>
    <name><![CDATA[Cert Tag]]></name>
  </Tag>
  <Tag>
    <id>1693034</id>
    <name><![CDATA[My Tag name]]></name>
  </Tag>
  <Tag>
    <id>1693032</id>
    <name><![CDATA[Groovy tag -1]]></name>
  </Tag>
</list>
</tags>
<comments>
  <count>0</count>
</comments>
<isScheduled>>false</isScheduled>
<lastScan>
  <id>827468</id>
  <name><![CDATA[Web Application Vulnerability Scan - CUSTOM
PARAM TEST]]></name>
</lastScan>
<createdBy>
  <id>4354</id>
  <username>user_alex</username>
  <firstName><![CDATA[Alex]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</createdBy>
<createdDate>2017-07-24T09:08:49Z</createdDate>
<updatedBy>
  <id>4354</id>
  <username>user_alex</username>
  <firstName><![CDATA[Alex]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</updatedBy>
<updatedAt>2017-09-24T23:34:17Z</updatedAt>
<screenshot><![CDATA[_9j_4AAQSkZJRgABAQEAAegBrAAD_2wBDAAYEBQYFBAYGBQYHB
wYICChAKCgkJChQODwwQFxQYGBcUFhYaHSUfGhshJBHYWICwgIyYnKSopGR8tMC0oMCUoKSj
_2wBDAQcHBwoIChMKChMoGhYaKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCg
... (shortened for brevity)
Convert this value in order to decode and view the image file (.jpg).
</screenshot>

```

```

    </WebApp>
  </data>
</ServiceResponse>

```

## Sample - Get details - DNS override settings

Let us get details of the web application with ID 2508873 that includes DNS override records. The dnsOverrides element lists the records.

### API request

```

curl -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webapp/2508873"

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>2508873</id>
      <name>
        <![CDATA[My Web App]]>
      </name>
      <url>
        <![CDATA[http://funkytown.vuln.qa.com:80/cassium/xss/]]>
      </url>
      <owner>
        <id>4354</id>
        <username>user_adam</username>
        <firstName>
          <![CDATA[Adam]]>
        </firstName>
        <lastName>
          <![CDATA[Smith]]>
        </lastName>
      </owner>
      <scope>ALL</scope>
      <attributes>
        <count>0</count>

```

```
</attributes>
<defaultScanner>
  <type>INTERNAL</type>
  <friendlyName>
    <![CDATA[db4_abcd_ab2]]>
  </friendlyName>
</defaultScanner>
<scannerLocked>>false</scannerLocked>
<progressiveScanning>>true</progressiveScanning>
<urlBlacklist>
  <count>0</count>
</urlBlacklist>
<urlWhitelist>
  <count>0</count>
</urlWhitelist>
<postDataBlacklist>
  <count>0</count>
</postDataBlacklist>
<authRecords>
  <count>0</count>
</authRecords>
<dnsOverrides>
  <count>2</count>
  <list>
    <DnsOverride>
      <id>1620</id>
      <name>
        <![CDATA[DNS Override Settings 1]]>
      </name>
    </DnsOverride>
    <DnsOverride>
      <id>1020</id>
      <name>
        <![CDATA[DNS Override Settings 2]]>
      </name>
    </DnsOverride>
  </list>
</dnsOverrides>
<useRobots>IGNORE</useRobots>
<useSitemap>>false</useSitemap>
<malwareMonitoring>>false</malwareMonitoring>
```

## Sample - Get details - logout regular expression list

Let us get details for the webapp with logout regular expression list.

**API request**

```
curl -u "USERNAME:PASSWORD" -X GET -H 'Content-type: text/xml'
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webapp/842222"
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>842222</id>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
      <owner>
        <id>337014</id>
        <username>user_john</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
      </owner>
      <scope>ALL</scope>
      <attributes>
        <count>0</count>
      </attributes>
      <defaultScanner>
        <type>EXTERNAL</type>
      </defaultScanner>
      <scannerLocked>>false</scannerLocked>
      <urlBlacklist>
        <count>0</count>
      </urlBlacklist>
      <urlWhitelist>
        <count>0</count>
      </urlWhitelist>
      <postDataBlacklist>
        <count>0</count>
      </postDataBlacklist>
      <logoutRegexList>
        <count>1</count>
        <list>
          <UrlEntry regex="true"><![CDATA[leave]]></UrlEntry>
        </list>
      </logoutRegexList>
    </WebApp>
  </data>
</ServiceResponse>
```

```

</logoutRegexList>
<authRecords>
  <count>0</count>
</authRecords>
....
</WebApp>
</data>
</ServiceResponse>

```

## Sample - Default authentication record details

Let us view the default authentication record details for a web application.

### API request

```

curl -n -u "USERNAME:PASSWORD" -X GET -H 'Content-type: text/xml'
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webapp/53040"

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>53040</id>
      <name><![CDATA[WASUI-5597]]></name>
      ...
      <config>
        <defaultAuthRecord>
          <id>9133</id>
          <name>
            <![CDATA[WASUI-6453]]>
          </name>
        </defaultAuthRecord>
      </config>
    </WebApp>
  </data>
</ServiceResponse>

```

## Sample - Selenium crawl script

Let us get details for the webapp with a response that returns details of the selenium crawl script along with other details for the web application.

### API request

```
curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webapp/937657"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/rest/xsd/3.0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>937657</id>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
      <owner>
        <id>337014</id>
        <username>john_doe</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
      </owner>
      <scope>ALL</scope>
      <attributes>
        <count>0</count>
      </attributes>
      <defaultScanner>
        <type>EXTERNAL</type>
      </defaultScanner>
      <scannerLocked>>false</scannerLocked>
      <urlBlacklist>
        <count>0</count>
      </urlBlacklist>
      <urlWhitelist>
        <count>0</count>
      </urlWhitelist>
      <postDataBlacklist>
        <count>0</count>
      </postDataBlacklist>
      <logoutRegexList>
```

```

    <count>0</count>
</logoutRegexList>
<authRecords>
    <count>0</count>
</authRecords>
<dnsOverrides>
    <count>0</count>
</dnsOverrides>
<useRobots>IGNORE</useRobots>
<useSitemap>>false</useSitemap>
<malwareMonitoring>>false</malwareMonitoring>
<malwareNotification>>false</malwareNotification>
<tags>
    <count>0</count>
</tags>
<comments>
    <count>0</count>
</comments>
<isScheduled>>false</isScheduled>
<createdBy>
    <id>337014</id>
    <username>john_doe</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
</createdBy>
<createdDate>2017-02-06T10:54:00Z</createdDate>
<updatedBy>
    <id>337014</id>
    <username>john_doe</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
</updatedBy>
<updatedDate>2017-02-06T10:54:00Z</updatedDate>
<config/>
<crawlingScripts>
    <count>1</count>
    <list>
        <SeleniumScript>
            <id>2500</id>
            <name><![CDATA[TestSeleniumScript]]>
            </name>
            <data>
                <![CDATA[
                    <?xml version="1.0" encoding="UTF-8"?>

```

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML
1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml"
xml:lang="en" lang="en">
<head profile="http://selenium-
ide.openqa.org/profiles/test-case">
<meta http-equiv="Content-Type"
content="text/html; charset=UTF-8" />
<link rel="selenium.base"
href="http://10.10.26.238" />
<title>New Test</title>
</head>
<body>
<table cellpadding="1"
cellspacing="1" border="1">
<thead>
<tr>
<td rowspan="1"
colspan="3">New Test</td>
</tr>
</thead>
<tbody>
<tr>
<td>open</td>
<td>http://10.10.26.23
8</td>
<td></td>
</tr>
<tr>
<td>type</td>
<td>name=login</td>
<td>admin</td>
</tr>
<tr>
<td>type</td>
<td>name=password</td>
<td>abc123</td>
</tr>
<tr>
<td>clickAndWait</td>
<td>name=submit</td>
<td></td>
</tr>
</tbody>
</table>

```

```

        </body></html>]]>
    </data>
    <requiresAuthentication>true
</requiresAuthentication>
    <startingUrl>
        <![CDATA[http://www.mywebapp.com]]>
    </startingUrl>
    <startingUrlRegex>true</startingUrlRegex>
</SeleniumScript>
</list>
</crawlingScripts>
</WebApp>
</data>
</ServiceResponse>

```

### Sample - Get details of a progressive scan

If Progressive Scanning is enabled for the subscription, the progressiveScanning element is displayed in GET call responses. If Progressive Scanning is not enabled for the subscription, the element is not included. For all existing web applications created prior to WAS 4.0 the value will be set to TRUE by default.

#### API request

```
curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webapp/323102"
```

#### XML response

```

<ServiceResponse
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>323102</id>
      <name>
        <![CDATA[MamboCMS]]>
      </name>

```

```
<url>
  <![CDATA[http://funkytown.abcd01.abcd.com/Forms/FormFie
lds/temp/updated_web_app_name]]>
</url>
...
<scannerLocked>>false</scannerLocked>
<progressiveScanning>>false</progressiveScanning>
...
```

## XSD

[<platform API server>/qps/xsd/3.0/was/webapp.xsd](#)

## Create Web Application

`/qps/rest/3.0/create/was/webapp`

[POST]

A web application is a configuration in your account. Once created, a user can select the web application as the target of a web application scan.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and WAS Asset Permission "Create Web Asset". The output includes web applications in the user's scope. If you want to add postman collection files, you must have the 'ENABLE\_POSTMAN\_COLLECTION' option enabled for your account. If this option is not enabled, contact Qualys Support to enable this option.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements.

[Click here for available operators](#)

When only "name" and "url" are specified:

- Scope defaults to ALL. The scanner will crawl all directories and sub-directories of the starting URL.
- No default option profile is specified. An option profile must be specified for each scan.
- No authentication records are defined. No form or server authentication will be performed.
- No blacklists or whitelists are defined. All directories and sub-directories of the starting URL will be scanned.

## Samples

[Create web app with minimum criteria](#)

[Create web app with one authentication record](#)

[Create web app with multiple criteria](#)

[Create web app with custom attributes](#)

[Create web app and set the default authentication record](#)

[Create web app and assign multiple scanner appliances](#)

[Create web app and add a selenium script](#)

[Create web app and configure Progressive Scanning](#)

---

---

---

### Sample - Create web app - minimum criteria

Let us create a new web application called “My Web Application” that has the starting URL “http://mywebapp.com”. The default web application settings are assigned automatically.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webapp/" <  
file.xml
```

Note: “file.xml” contains the request POST data.

#### Request POST data

```
<ServiceRequest>  
  <data>  
    <WebApp>  
      <name><![CDATA[My Web Application]]></name>  
      <url><![CDATA[http://mywebapp.com]]></url>  
    </WebApp>
```

```
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>1912949</id>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
      <owner>
        <id>45941</id>
        <username>username</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Smith]]></lastName>
      </owner>
      <scope>ALL</scope>
      <attributes>
        <count>0</count>
      </attributes>
      <defaultScanner>
        <type>EXTERNAL</type>
      </defaultScanner>
      <scannerLocked>>false</scannerLocked>
      <urlBlacklist>
        <count>0</count>
      </urlBlacklist>
      <urlWhitelist>
        <count>0</count>
      </urlWhitelist>
      <postDataBlacklist>
        <count>0</count>
      </postDataBlacklist>
      <authRecords>
        <count>0</count>
      </authRecords>
      <useRobots>IGNORE</useRobots>
      <useSitemap>>false</useSitemap>
      <malwareMonitoring>>false</malwareMonitoring>
```

```
<tags>
  <count>0</count>
</tags>
<comments>
  <count>0</count>
</comments>
<isScheduled>>false</isScheduled>
<createdBy>
  <id>45941</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</createdBy>
<createdDate>2017-10-18T18:26:40Z</createdDate>
<updatedBy>
  <id>45941</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</updatedBy>
<updatedDate>2017-10-18T18:26:40Z</updatedDate>
</WebApp>
</data>
</ServiceResponse>
```

## Sample - Create web app with one authentication record

Let us create a new web application called “My Web Application” that has the starting URL “http://mywebapp.com” and has 1 authentication record.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webapp/" <
file.xml
```

Note: “file.xml” contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebApp>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
```

```

<authRecords>
  <set>
    <WebAppAuthRecord>
      <id>77350</id>
    </WebAppAuthRecord>
  </set>
</authRecords>
</WebApp>
</data>
</ServiceRequest>

```

## XML response

```

<<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>1929030</id>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
      <owner>
        <id>45941</id>
        <username>username</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Smith]]></lastName>
      </owner>
      <scope>ALL</scope>
      <attributes>
        <count>0</count>
      </attributes>
      <defaultScanner>
        <type>EXTERNAL</type>
      </defaultScanner>
      <scannerLocked>>false</scannerLocked>
      <urlBlacklist>
        <count>0</count>
      </urlBlacklist>
      <urlWhitelist>
        <count>0</count>
      </urlWhitelist>
      <postDataBlacklist>

```

```

    <count>0</count>
  </postDataBlacklist>
  <authRecords>
    <count>1</count>
    <list>
      <WebAppAuthRecord>
        <id>77350</id>
        <name><![CDATA[My Authentication Record]]></name>
      </WebAppAuthRecord>
    </list>
    <useRobots>IGNORE</useRobots>
    ...
  </WebApp>
</data>
</ServiceResponse>

```

## Sample - Create web app with multiple criteria

Let us create a new web application with the name “My Web Application” and the starting URL “http://www.example.com”. The web application is assigned custom settings as defined in the request POST data.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webapp/" <
file.xml

```

Note: “file.xml” contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <data>
    <WebApp>
      <name><![CDATA[My Web Application]]></name>
      <url> <![CDATA[http://www.example.com]]></url>
      <scope>DOMAINS</scope>
      <domains>
        <set>
          <Domain><![CDATA[corp2.ab.myapp.com]]></Domain>
          <Domain><![CDATA[corp1.myapp.com]]></Domain>
        </set>
      </domains>
      <uris>

```

```

    <set>
<Url><![CDATA[http://corp1.myapp.com]]></Url>
<Url><![CDATA[http://corp1.myapp.com/]]></Url>
<Url><![CDATA[https://corp1.myapp.com]]></Url>
<Url><![CDATA[https://corp1.myapp.com/]]></Url>
<Url><![CDATA[https://corp1.myapp.com:443]]></Url>
<Url><![CDATA[https://corp1.myapp.com:443/]]></Url>
<Url><![CDATA[http://corp1.myapp.com:8080/]]></Url>
<Url><![CDATA[http://corp1.myapp.com/startingUri]]></Url>
<Url><![CDATA[http://corp1.myapp.com/startingUri?]]></Url>
<Url><![CDATA[http://corp1.myapp.com/startingUri?param=true]]> </Url>
<Url><![CDATA[http://corp1.myapp.com/startingUri?param=true&param2=false]]></Url>
<Url><![CDATA[http://corp1.myapp.com/otherUri]]></Url>
<Url><![CDATA[http://corp1.myapp.com/otherUri?param=1]]></Url>
<Url><![CDATA[http://corp2.ab.myapp.com]]></Url>
<Url><![CDATA[http://corp2.ab.myapp.com/]]></Url>
<Url><![CDATA[https://corp2.ab.myapp.com]]></Url>
<Url><![CDATA[https://corp2.ab.myapp.com/]]></Url>
<Url><![CDATA[https://corp2.ab.myapp.com:443]]></Url>
<Url><![CDATA[https://corp2.ab.myapp.com:443/]]></Url>
<Url><![CDATA[http://corp2.ab.myapp.com:8080/]]></Url>
<Url><![CDATA[http://corp2.ab.myapp.com/startingUri]]></Url>
<Url><![CDATA[http://corp2.ab.myapp.com/startingUri?]]></Url>
<Url><![CDATA[http://corp2.ab.myapp.com/startingUri?param=true]]></Url>
>
<Url><![CDATA[http://corp2.ab.myapp.com:443/startingUri?param=true&param2=false]]></Url>
<Url><![CDATA[https://corp2.ab.myapp.com:8080/otherUri]]></Url>
<Url><![CDATA[https://corp2.ab.myapp.com/otherUri?param=1]]></Url>
<Url><![CDATA[https://corp2.ab.myapp.com/otherUri?param=1]]></Url>
</set>
</uris>
    <tags><set>
    <Tag><id>217118</id></Tag>
    <Tag><id>152743</id></Tag>
    <Tag><id>216368</id></Tag>
    <Tag><id>153442</id></Tag>
    </set>
    </tags>
    <defaultProfile>
    <id>90212</id>
    </defaultProfile>
    <defaultScanner>
    <type>INTERNAL</type>

```

```

        <friendlyName><![CDATA[friendlyname]]>
</friendlyName>
    </defaultScanner>
    <dnsOverrides>
        <set>
            <DnsOverride>
                <id>2022</id>
            </DnsOverride>
        </set>
    </dnsOverrides>
    <useRobots>BLACKLIST</useRobots>
    <useSitemap>true</useSitemap>
    <headers>
        <set>
            <WebAppHeader><![CDATA[some headers]]> </WebAppHeader>
        </set>
    </headers>
    <urlBlacklist>
        <set>
            <UrlEntry regex="true">
<![CDATA[http://rg.blacklist.*.qa.myapp.com]]></UrlEntry>
            <UrlEntry regex="true">
<![CDATA[http://rg.blacklist.*?]]></UrlEntry>
            <UrlEntry>
<![CDATA[http://url.blacklist.2.ab.myapp.com]]></UrlEntry>
            <UrlEntry regex="false">
<![CDATA[http://url.blacklist.3.qa.myapp.com]]></UrlEntry>
        </set>
    </urlBlacklist>
    <urlWhitelist>
        <set>
            <UrlEntry regex="true">
<![CDATA[http://rg.whitelist.*.qa.myapp.com]]></UrlEntry>
            <UrlEntry regex="true">
<![CDATA[http://rg.whitelist.*?]]></UrlEntry>
            <UrlEntry><![CDATA[http://url
.whitelist.2.ab.myapp.com]]></UrlEntry><UrlEntry regex="false"><![CDAT
[http://url.whitelist.3.ab.myapp.com]]></UrlEntry>
        </set>
    </urlWhitelist>
    <postDataBlacklist>
        <set>
            <UrlEntry regex="true"><![CDATA
[http://rg.postdatblacklist.*.ab.myapp.com]]></UrlEntry>

```

```

        <UrlEntry
regex="true"><![CDATA[http://rg.postdatblacklist.*?]]></UrlEntry>
        </set>
    </postDataBlacklist>
    <comments>
        <set>
            <Comment>
                <contents><![CDATA[some additional
comments]]></contents>
            </Comment>
        </set>
    </comments>
</WebApp>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
    <responseCode>SUCCESS</responseCode>
    <count>1</count>
    <data>
        <WebApp>
            <id>1912750</id>
            <name><![CDATA[My Web Application]]></name>
            <url><![CDATA[http://www.example.com]]></url>
            <owner>
                <id>45941</id>
                <username>username</username>
                <firstName><![CDATA[John]]></firstName>
                <lastName><![CDATA[Smith]]></lastName>
            </owner>
            <scope>DOMAINS</scope>
            <domains>
                <count>2</count>
                <list>
                    <Domain><![CDATA[corp1.myapp.com]]></Domain>
                    <Domain><![CDATA[corp2.ab.myapp.com]]></Domain>
                </list>
            </domains>
            <uris>
                <count>26</count>
            </uris>
        </WebApp>
    </data>
</ServiceResponse>

```

```

    <list>
      <Url><![CDATA[https://corp2.ab.myapp.com]]></Url>
      <Url><![CDATA[http://corp1.myapp.com/otherUri?param=1]]></Ur
l>
      <Url><![CDATA[http://corp1.myapp.com/]]></Url>
      <Url><![CDATA[https://corp1.myapp.com]]></Url>
      <Url><![CDATA[http://corp1.myapp.com/startingUri?]]></Url>
      <Url><![CDATA[https://corp2.ab.myapp.com:443/]]></Url>
      <Url><![CDATA[https://corp2.ab.myapp.com/otherUri?param=1]]>
</Url>
      <Url><![CDATA[https://corp1.myapp.com:443/]]></Url>
      <Url><![CDATA[http://corp2.ab.myapp.com/startingUri?param=tr
ue]]></Url>
      <Url><![CDATA[http://corp2.ab.myapp.com:8080/]]></Url>
      <Url><![CDATA[http://corp1.myapp.com/otherUri]]></Url>
      <Url><![CDATA[http://corp1.myapp.com/startingUri?param=true&
param2=false]]></Url>
      <Url><![CDATA[http://corp1.myapp.com]]></Url>
      <Url><![CDATA[http://corp1.myapp.com/startingUri?param=true]
]></Url>
      <Url><![CDATA[http://corp2.ab.myapp.com]]></Url>
      <Url><![CDATA[https://corp2.ab.myapp.com/]]></Url>
      <Url><![CDATA[http://corp2.ab.myapp.com/]]></Url>
      <Url><![CDATA[https://corp2.ab.myapp.com:443]]></Url>
      <Url><![CDATA[http://corp1.myapp.com/startingUri]]></Url>
      <Url><![CDATA[https://corp1.myapp.com:443]]></Url>
      <Url><![CDATA[http://corp2.ab.myapp.com/startingUri]]></Url>
      <Url><![CDATA[http://corp1.myapp.com:8080/]]></Url>
      <Url><![CDATA[https://corp2.ab.myapp.com:8080/otherUri]]></U
rl>
      <Url><![CDATA[https://corp1.myapp.com/]]></Url>
      <Url><![CDATA[http://corp2.ab.myapp.com/startingUri?]]></Url
>
      <Url><![CDATA[http://corp2.ab.myapp.com:443/startingUri?param=t
rue&param2=false]]></Url>
    </list>
  </uris>
  <defaultProfile>
    <id>90212</id>
    <name><![CDATA[Initial WAS Options]]></name>
  </defaultProfile>
  <defaultScanner>
    <type>INTERNAL</type>
    <friendlyName><![CDATA[friendlyname]]></friendlyName>
  </defaultScanner>

```

```

<scannerLocked>false</scannerLocked>
<dnsOverrides>
  <set>
    <DnsOverride>
      <id>2022</id>
    </DnsOverride>
  </set>
</dnsOverrides>
<urlBlacklist>
  <count>4</count>
  <list>
    <UrlEntry
regex="false"><![CDATA[http://url.blacklist.2.ab.myapp.com]]></UrlEntry>
    <UrlEntry
regex="false"><![CDATA[http://url.blacklist.3.ab.myapp.com]]></UrlEntry>
    <UrlEntry
regex="true"><![CDATA[http://rg.blacklist.*.ab.myapp.com]]></UrlEntry>
    <UrlEntry
regex="true"><![CDATA[http://rg.blacklist.*?]]></UrlEntry>
  </list>
</urlBlacklist>
<urlWhitelist>
  <count>4</count>
  <list>
    <UrlEntry
regex="true"><![CDATA[http://rg.whitelist.*.ab.myapp.com]]></UrlEntry>
    <UrlEntry
regex="true"><![CDATA[http://rg.whitelist.*?]]></UrlEntry>
    <UrlEntry
regex="false"><![CDATA[http://url.whitelist.2.ab.myapp.com]]></UrlEntry>
    <UrlEntry
regex="false"><![CDATA[http://url.whitelist.3.ab.myapp.com]]></UrlEntry>
  </list>
</urlWhitelist>
<postDataBlacklist>
  <count>2</count>
  <list>
    <UrlEntry
regex="true"><![CDATA[http://rg.postdatblacklist.*.ab.myapp.com]]></Ur
lEntry>

```

```

    <UrlEntry
regex="true"><![CDATA[http://rg.postdatblacklist.*?]]></UrlEntry>
  </list>
</postDataBlacklist>
<authRecords>
  <count>0</count>
</authRecords>
<useRobots>BLACKLIST</useRobots>
<useSitemap>true</useSitemap>
<headers>
  <count>1</count>
  <list>
    <WebAppHeader><![CDATA[some headers]]></WebAppHeader>
  </list>
</headers>
<malwareMonitoring>>false</malwareMonitoring>
<tags>
  <count>4</count>
  <list>
    <Tag>
      <id>152743</id>
      <name><![CDATA[Asset Groups]]></name>
    </Tag>
    <Tag>
      <id>217118</id>
      <name><![CDATA[AUG 27]]></name>
    </Tag>
    <Tag>
      <id>153442</id>
      <name><![CDATA[Malware Domain Assets]]></name>
    </Tag>
    <Tag>
      <id>216368</id>
      <name><![CDATA[Asset name rule]]></name>
    </Tag>
  </list>
</tags>
<comments>
  <count>1</count>
  <list>
    <Comment>
      <contents><![CDATA[some additional comments]]></contents>
      <createdDate>2017-10-18T17:57:32Z</createdDate>
    </Comment>
  </list>

```

```

</comments>
<isScheduled>>false</isScheduled>
<createdBy>
  <id>45941</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</createdBy>
<createdDate>2017-10-18T17:57:32Z</createdDate>
<updatedBy>
  <id>45941</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</updatedBy>
<updatedAt>2017-10-18T17:57:32Z</updatedAt>
</WebApp>
</data>
</ServiceResponse>

```

## Sample - Create web app with custom attributes

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webapp/" <
file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <data>
    <WebApp>
      <name><![CDATA[Custom Attribute via API]]></name>
<url><![CDATA[http://funkytown.vuln.qa.qualys.com:80/updated_web_app_n
ame/]]></url>
      <attributes>
        <set>
          <Attribute>
            <name>Custom key 1</name>
            <value><![CDATA[Custom value 1]]></value>
          </Attribute>
        </set>

```

```

    </attributes>
  </WebApp>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>2514680</id>
      <name><![CDATA[Custom Attribute via API]]></name>
<url><![CDATA[http://funkytown.vuln.qa.qualys.com:80/updated_web_app_n
ame/]]></url>
      <owner>
        <id>4354</id>
        <username>user_steve</username>
        <firstName><![CDATA[Steve]]></firstName>
        <lastName><![CDATA[Smith]]></lastName>
      </owner>
      <scope>ALL</scope>
      <attributes>
        <count>1</count>
        <list>
          <Attribute>
            <name><![CDATA[Custom key 1]]></name>
            <value><![CDATA[Custom value 1]]></value>
          </Attribute>
        </list>
      </attributes>
      <defaultScanner>
        <type>EXTERNAL</type>
      </defaultScanner>
      <scannerLocked>>false</scannerLocked>
      <progressiveScanning>>true</progressiveScanning>
      <urlBlacklist>
        <count>0</count>
      </urlBlacklist>
      <urlWhitelist>
        <count>0</count>

```

```
</urlWhitelist>
<postDataBlacklist>
  <count>0</count>
</postDataBlacklist>
<authRecords>
  <count>0</count>
</authRecords>
<dnsOverrides>
  <count>0</count>
</dnsOverrides>
<useRobots>IGNORE</useRobots>
<useSitemap>false</useSitemap>
<malwareMonitoring>false</malwareMonitoring>
<tags>
  <count>0</count>
</tags>
<comments>
  <count>0</count>
</comments>
<isScheduled>false</isScheduled>
<createdBy>
  <id>4354</id>
  <username>user_steve</username>
  <firstName><![CDATA[Steve]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</createdBy>
<createdDate>2017-09-30T00:18:38Z</createdDate>
<updatedBy>
  <id>4354</id>
  <username>user_steve</username>
  <firstName><![CDATA[Steve]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</updatedBy>
<updateDate>2017-09-30T00:18:38Z</updateDate>
<config/>
</WebApp>
</data>
</ServiceResponse>
```

## Sample - Create web app and set the default authentication record

Let us configure the default authentication record while creating or updating the web application. Create a web application with default authentication record ID #9133.

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webapp/" <
file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <data>
    <WebApp>
      <name>
        <![CDATA[Create webapp with default auth record]]>
      </name>
      <url><![CDATA[http://mywebapp.com]]></url>
      <scope>ALL</scope>
      <scannerLocked>>false</scannerLocked>
      <useRobots>IGNORE</useRobots>
      <useSitemap>>false</useSitemap>
      <malwareMonitoring>>false</malwareMonitoring>
      <config>
        <defaultAuthRecord>
          <id>9133</id>
        </defaultAuthRecord>
      </config>
    </WebApp>
  </data>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/
was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>53040</id>
      <name>
        <![CDATA[Create webapp with default auth record]]>
      </name>
```

```
...
  <config>
    <defaultAuthRecord>
      <id>9133</id>
      <name>
        <![CDATA[WAS-9133]]>
      </name>
    </defaultAuthRecord>
  </config>
</WebApp>
</data>
</ServiceResponse>
```

## Sample - Create web app and assign multiple scanner appliances

Let us create a new web application called “My Web Application” with the starting URL “http://mywebapp.com” and assign a group of scanners using tag Scannerpool (ID 15415353311147). The default web application settings are assigned automatically.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webapp/" <
file.xml
```

Note: “file.xml” contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebApp>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
      <defaultScannerTags>
        <set>
          <Tag>
            <id>15415353311147</id>
          </Tag>
        </set>
      </defaultScannerTags>
    </WebApp>
  </data>
```

```
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/
was/webapp.xsd">
<responseCode>SUCCESS</responseCode>
  <count>1</count>
<data>
  <WebApp>
    <id>842422</id>
    <name><![CDATA[My Web Application]]></name>
    <url><![CDATA[http://mywebapp.com]]></url>
    <owner>
      <id>337014</id>
      <username>user_john</username>
      <firstName><![CDATA[John]]></firstName>
      <lastName><![CDATA[Doe]]></lastName>
    </owner>
    <scope>ALL</scope>
    <attributes>
      <count>0</count>
    </attributes>
    <defaultScannerTags>
      <count>1</count>
      <list>
        <Tag>
          <id>15415353311147</id>
          <name>
            <![CDATA[TagForScanner]]>
          </name>
        </Tag>
      </list>
    </defaultScannerTags>
    <scannerLocked>>false</scannerLocked>
    <progressiveScanning>>false</progressiveScanning>
    <urlBlacklist>
      <count>0</count>
    </urlBlacklist>
    <urlWhitelist>
      <count>0</count>
    </urlWhitelist>
```

```
<postDataBlacklist>
  <count>0</count>
</postDataBlacklist>
<logoutRegexList>
  <count>0</count>
</logoutRegexList>
<authRecords>
  <count>0</count>
</authRecords>
<dnsOverrides>
  <count>0</count>
</dnsOverrides>
<useRobots>IGNORE</useRobots>
<useSitemap>>false</useSitemap>
<malwareMonitoring>>false</malwareMonitoring>
<tags>
  <count>0</count>
</tags>
<comments>
  <count>0</count>
</comments>
<isScheduled>>false</isScheduled>
<createdBy>
  <id>337014</id>
  <username>user_john</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</createdBy>
<createdDate>2017-01-12T12:03:37Z</createdDate>
<updatedBy>
  <id>337014</id>
  <username>user_john</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</updatedBy>
<updatedAt>2017-01-12T12:03:37Z</updatedAt>
<config/>
</WebApp>
</data>
</ServiceResponse>
```

## Sample - Create web app and add a selenium script

Let us create a new web application called “My Web Application” that has the starting URL “http://mywebapp.com” and add selenium script (TestSeleniumScript) to it.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webapp/" <
file.xml
```

Note: “file.xml” contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebApp>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
      <crawlerScripts>
        <set>
          <SeleniumScript>
            <name><![CDATA[TestSeleniumScript]]></name>
            <startingUrl><![CDATA[http://www.mywebapp.com]
]>
          </startingUrl>
        </data>
        <![CDATA[<?xml version="1.0"
encoding="UTF-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" xml:lang="en" lang="en">
<head profile="http://selenium-ide.openqa.org/profiles/test-case">
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />
<link rel="selenium.base" href="http://10.10.26.238" /><title>New
Test</title></head>
<body>
<table cellpadding="1" cellspacing="1" border="1">
<thead>
<tr><td rowspan="1" colspan="3">New Test</td></tr>
</thead><tbody><tr><td>open</td><td>http://10.10.26.238/</td><td></td>
</tr><tr><td>type</td><td>name=login</td><td>admin</td></tr><tr><td>ty
pe</td><td>name=password</td><td>abc123</td></tr><tr><td>clickAndWait<
/td><td>name=submit</td><td></td></tr></tbody></table></body></html>]]
>
```

```

        </data>
        <requiresAuthentication>true</requiresAuthenti
cation>
        <startingUrlRegex>true</startingUrlRegex>
        </SeleniumScript>
        </set>
    </crawlingScripts>
</WebApp>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/rest/xsd/3.0/was/webapp.xsd">
    <responseCode>SUCCESS</responseCode>
    <count>1</count>
    <data>
        <WebApp>
            <id>937657</id>
            <name><![CDATA[My Web Application]]></name>
            <url><![CDATA[http://mywebapp.com]]></url>
            <owner>
                <id>337014</id>
                <username>john_doe</username>
                <firstName><![CDATA[John]]></firstName>
                <lastName><![CDATA[Doe]]></lastName>
            </owner>
            <scope>ALL</scope>
            <attributes>
                <count>0</count>
            </attributes>
            <defaultScanner>
                <type>EXTERNAL</type>
            </defaultScanner>
            <scannerLocked>>false</scannerLocked>
            <urlBlacklist>
                <count>0</count>
            </urlBlacklist>
            <urlWhitelist>
                <count>0</count>
            </urlWhitelist>
            <postDataBlacklist>

```

```
    <count>0</count>
  </postDataBlacklist>
  <logoutRegexList>
    <count>0</count>
  </logoutRegexList>
  <authRecords>
    <count>0</count>
  </authRecords>
  <dnsOverrides>
    <count>0</count>
  </dnsOverrides>
  <useRobots>IGNORE</useRobots>
  <useSitemap>>false</useSitemap>
  <malwareMonitoring>>false</malwareMonitoring>
  <malwareNotification>>false</malwareNotification>
  <tags>
    <count>0</count>
  </tags>
  <comments>
    <count>0</count>
  </comments>
  <isScheduled>>false</isScheduled>
  <createdBy>
    <id>337014</id>
    <username>john_doe</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </createdBy>
  <createdDate>2017-02-06T10:54:00Z</createdDate>
  <updatedBy>
    <id>337014</id>
    <username>john_doe</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </updatedBy>
  <updatedDate>2017-02-06T10:54:00Z</updatedDate>
</config/>
<crawlingScripts>
  <count>1</count>
  <list>
    <SeleniumScript>
      <id>2500</id>
      <name>
        <![CDATA[TestSeleniumScript]]>
      </name>
    </SeleniumScript>
  </list>
</crawlingScripts>
```

```

<data>
  <![CDATA[
    <?xml version="1.0" encoding="UTF-8"?>
    <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML
1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
    <html xmlns="http://www.w3.org/1999/xhtml"
xml:lang="en" lang="en">
      <head profile="http://selenium-
ide.openqa.org/profiles/test-case">
        <meta http-equiv="Content-Type"
content="text/html; charset=UTF-8" />
        <link rel="selenium.base"
href="http://10.10.26.238" />
        <title>New Test</title>
      </head>
      <body>
        <table cellpadding="1"
cellspacing="1" border="1">
          <thead>
            <tr>
              <td rowspan="1"
colspan="3">New Test</td>
            </tr>
          </thead>
          <tbody>
            <tr>
              <td>open</td>
              <td>http://10.10.26.23
8</td>
              <td></td>
            </tr>
            <tr>
              <td>type</td>
              <td>name=login</td>
              <td>admin</td>
            </tr>
            <tr>
              <td>type</td>
              <td>name=password</td>
              <td>abc123</td>
            </tr>
            <tr>
              <td>clickAndWait</td>
              <td>name=submit</td>
              <td></td>

```

```
        </tr>
      </tbody>
    </table>
  </body></html>]]>
</data>
<requiresAuthentication>true
</requiresAuthentication>
<startingUrl>
  <![CDATA[http://www.mywebapp.com]]>
</startingUrl>
<startingUrlRegex>true</startingUrlRegex>
</SeleniumScript>
</list>
</crawlingScripts>
</WebApp>
</data>
</ServiceResponse>
```

## Sample: Progressive Scanning

The user will be able to set `progressiveScanning` to true or false, if Progressive Scanning is enabled for the subscription. When Progressive Scanning is enabled for the subscription, if `progressiveScanning` option is not specified during CREATE request, by default the option will be enabled for the web application.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webapp/" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebApp>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
      <progressiveScanning>false</progressiveScanning>
    </WebApp>
  </data>
```

```
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>1912949</id>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[http://mywebapp.com]]></url>
      ...
      <scannerLocked>>false</scannerLocked>
      <progressiveScanning>>false</progressiveScanning>
      ...
    </WebApp>
  </data>
</ServiceResponse>
```

If Progressive Scanning is not enabled for the subscription, the `<progressiveScanning>` element cannot not be provided, otherwise an error will be returned.

### XML response (error)

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd">
  <responseCode>INVALID_REQUEST</responseCode>
  <responseErrorDetails>
    <errorMessage>Progressive scanning is not enabled in your
subscription.</errorMessage>
    <errorResolution>Please check with your account manager to
enable this option.</errorResolution>
  </responseErrorDetails>
</ServiceResponse>
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd)/qps/xsd/3.0/was/webapp.xsd

## Update Web Application

`/qps/rest/3.0/update/was/webapp/<id>`

[POST]

Update a web application configuration in your account.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and WAS Asset Permission "Edit Web Asset", "Edit Web Application URL" and "Select and Lock/Unlock Scanner Appliance". The output includes web applications in the user's scope. If you want to add postman collection files, you must have the 'ENABLE\_POSTMAN\_COLLECTION' option enabled for your account. If this option is not enabled, contact Qualys Support to enable this option.

### Input Parameters

The element "id" (integer) is required, where "id" identifies a web application.

[Click here for available operators](#)

### Samples

[Update web app with minimum information](#)

[Update authentication records for web app](#)

[Update multiple settings](#)

[Update web app to set default cancel time](#)

[Update custom attribute value for the web app](#)

[Update the default authentication record of the web app](#)



## Sample - Update web app with minimum information

Let us update information for the web application with ID 1234, change the name to “My WebApp Name” .

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/update/was/webapp/1234" <file.xml
```

Note: “file.xml” contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebApp>
      <name>My WebApp Name</name>
    </WebApp>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd">
<responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>1234</id>
    </WebApp>
  </data>
</ServiceResponse>
```

## Sample - Update authentication records for web app

Let us update web application with ID 1234, add 1 authentication record and remove 1 authentication record.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/webapp/1234" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebApp>
      <name><![CDATA[My WebApp Name]]></name>
    <authRecords>
      <add>
        <WebAppAuthRecord>
          <id>77355</id>
        </WebAppAuthRecord>
      </add>
      <remove>
        <WebAppAuthRecord>
          <id>77356</id>
        </WebAppAuthRecord>
      </remove>
    </authRecords>
  </WebApp>
</data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>1234</id>
    </WebApp>
  </data>
</ServiceResponse>
```

### Sample - Update multiple settings

Let us update multiple settings for a web application. The web application is assigned custom settings as defined in the request POST data.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/webapp/2607056"
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebApp>
      <name>My Web Application</name>
    <url>http://mywebapp.com</url>
    <attributes>
      <remove>
        <Attribute>
          <name>Business Function</name>
        </Attribute>
        <Attribute>
          <name>Business Location</name>
        </Attribute>
      </remove>
      <update>
        <Attribute>
          <name>Business Description</name>
          <value>Business Description Value - UPDATED</value>
        </Attribute>
      </update>
    </attributes>
    <defaultProfile><id>365333</id></defaultProfile>
    <urlBlacklist>
      <set>
        <UrlEntry><![CDATA[http://url.blacklist.1.mywebapp.com]]></UrlEntry>
        <UrlEntry
regex="false"><![CDATA[http://url.blacklist.2.mywebapp.com]]></UrlEntry>
        <UrlEntry
regex="true"><![CDATA[http://rg.blacklist.*.com]]></UrlEntry>
      </set>
```

```

    </urlBlacklist>
    <urlWhitelist>
      <set>
<UrlEntry><![CDATA[http://url.whitelist.1.mywebapp.com]]></UrlEntry>
      <UrlEntry
regex="false"><![CDATA[http://url.whitelist.2.mywebapp.com]]></UrlEntr
y>
      <UrlEntry
regex="true"><![CDATA[http://rg.whitelist.*.mywebapp.com]]></UrlEntry>
      </set>
    </urlWhitelist>
    <postDataBlacklist>
      <set>
      <UrlEntry
regex="true"><![CDATA[http://url.postdatablacklist.1.mywebapp.com]]></
UrlEntry>
      <UrlEntry
regex="true"><![CDATA[http://url.postdatablacklist.2.mywebapp.com]]></
UrlEntry>
      </set>
    </postDataBlacklist>
    <useRobots>ADD_PATHS</useRobots>
    <useSitemap>>true</useSitemap>
    <headers>
      <set>
        <WebAppHeader>X-TTP-REQUESTED-BY: Qualys Test</WebAppHeader>
      </set>
    </headers>
  </WebApp>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>2607056</id>
    </WebApp>
  </data>

```

```
</ServiceResponse>
```

## Sample - Update web app to set default cancel time

Let us set the default cancel scan option for web application ID 2392272. Scans of this web application will be set to cancel at 10pm by default.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/webapp/2392272"  
< file.xml  
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>  
  <data>  
    <WebApp>  
      <name><![CDATA[My Web App]]></name>  
      <url><![CDATA[http://mywebapp.com]]></url>  
      <config><cancelScansAt>22:00</cancelScansAt></config>  
    </WebApp>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.qualys.com/qps/  
/xsd/3.0/was/webapp.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WebApp>  
      <id>2392272</id>  
    </WebApp>  
  </data>  
</ServiceResponse>
```

## Sample - Update custom attribute value for the web app

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/webapp/2514679"
< file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <data>
    <WebApp>
      <attributes>
        <update>
          <Attribute>
            <name>Custom key 1</name>
            <value><![CDATA[Custom value 1]]></value>
          </Attribute>
        </update>
      </attributes>
    </WebApp>
  </data>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>2514679</id>
    </WebApp>
  </data>
</ServiceResponse>
```

**Sample - Update the default authentication record of the web app**

Let us update the default authentication record for the web application with ID 33831.

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/webapp/33831" <
file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <data>
    <WebApp>
      <config>
        <defaultAuthRecord>
          <id>9133</id>
        </defaultAuthRecord>
      </config>
    </WebApp>
  </data>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/
was/webapp.xsd">
<responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>33831</id>
    </WebApp>
  </data>
</ServiceResponse>
```

**XSD**

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd)/qps/xsd/3.0/was/webapp.xsd

## Delete Web Application

`/qps/rest/3.0/delete/was/webapp/<id>`

`/qps/rest/3.0/delete/was/webapp/<filters>`

[POST]

Delete a web application configuration in your account.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission “API Access” and WAS Asset Permission “Delete Web Asset”. The web application to be deleted must be within the user’s scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) Web application ID.
name	(text) Web application name.
url	(text) The URL of web application.
removeFromSubscription	(Boolean) When set to true, deletes the web application asset from your subscription if the web application is not shared with other modules such as WAF.  The “removeFromSubscription” flag is ignored if the web application that you want to remove from the subscription is shared with

other modules. In that case, the Delete Web application API request with this flag set to true will only delete the web application from WAS and not from your subscription.

tags.name	(text) Tag name assigned to web application.
tags.id	(integer) Tag ID assigned to web application.
createdDate	(date) The date when the web application was created in WAS, in UTC date/time format.
updatedAt	(date) The date when the web application was last updated in WAS, in UTC date/time format.
isScheduled	(boolean) A flag indicating whether a scan is scheduled for web application.
isScanned	(boolean) A flag indicating whether the web application has been scanned.
lastScan.status	(keyword) Scan status reported by last web application scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR or CANCELED
lastScan.date	(date) Date when web application was last scanned, in UTC date/time format.

## Sample - Delete a single web application

Let us delete the web application that has the ID 1234.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X  
POST "https://qualysapi.qualys.com/qps/rest/3.0/delete/was/webapp/123  
4"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>1234</id>
    </WebApp>
  </data>
</ServiceResponse>
```

### Sample - Delete bulk web applications

Let us delete web applications in the user's account that have a name with the word "Merchant" and have an ID greater than 323000.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/webapp/" <
file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="name" operator="CONTAINS">Merchant</Criteria>
    <Criteria field="id" operator="GREATER">323000</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>3</count>
```

```
<data>
  <WebApp>
    <id>323126</id>
  </WebApp>
  <WebApp>
    <id>324256</id>
  </WebApp>
  <WebApp>
    <id>323476</id>
  </WebApp>
</data>
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server/qls/xsd/3.0/was/webapp.xsd)/qls/xsd/3.0/was/webapp.xsd

## Purge Web Application

`/qps/rest/3.0/purge/was/webapp/<id>`

`/qps/rest/3.0/purge/was/webapp/<filters>`

[POST]

Purging a web application results in removal of the scan findings from the web application's scan history. Henceforth, the newly generated web application reports will not include findings from previously completed scans. All dates must be entered in UTC date/time format.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and WAS Asset Permission "Purge Web Asset". The web application to be purged must be within the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) Web application ID.
name	(text) Web application name.
url	(text) The URL of web application.
tags.name	(text) Tag name assigned to web application.
tags.id	(integer) Tag ID assigned to web application.

createdDate	(date) The date when the web application was created in WAS, in UTC date/time format.
updatedAt	(date) The date when the web application was last updated in WAS, in UTC date/time format.
isScheduled	(boolean) A flag indicating whether a scan is scheduled for web application.
isScanned	(boolean) A flag indicating whether the web application has been scanned.
lastScan.status	(keyword) Scan status reported by last web application scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR or CANCELED
lastScan.date	(date) Date when web application was last scanned, in UTC date/time format.

## Sample - Purge a single web application

Let us purge the web application with ID 32420.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" https://qualysapi.qualys.com/qps/rest/3.0/purge/was/webapp/32420"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webapp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebApp>
      <id>32420</id>
    </WebApp>
  </data>
```

```
</ServiceResponse>
```

## Sample - Purge multiple web applications

Let us purge web applications in the user's account that have a name with the word "Merchant" and have an ID greater than 323000.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
https://qualysapi.qualys.com/qps/rest/3.0/purge/was/webapp/ < file.xml  
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="name" operator="CONTAINS">Merchant</Criteria>  
    <Criteria field="id" operator="GREATER">323000</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/webapp.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>3</count>  
  <data>  
    <WebApp>  
      <id>323126</id>  
    </WebApp>  
    <WebApp>  
      <id>324256</id>  
    </WebApp>  
    <WebApp>  
      <id>323476</id>  
    </WebApp>  
  </data>  
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/webapp.xsd)/qps/xsd/3.0/was/webapp.xsd

## Download Selenium Script

/qps/rest/3.0/downloadSeleniumScript/was/webapp

[POST]

Download the selenium script file that is associated with the web application.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and WAS Asset Permission "View/download Selenium Script sensitive contents". The web application to be purged must be within the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies a web application.

[Click here for available operators](#)

### Sample - Download selenium script

Let us download the selenium script file associated with a web application with ID 1234.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST"--  
data-binary @-  
https://qualysapi.qualys.com//qps/rest/3.0/downloadSeleniumScript/was/  
webapp/" < file.xml"
```

Note: "file.xml" contains the request POST data.

#### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="id" operator="EQUALS">1234</Criteria>  
    <Criteria field="crawlingScripts.id"  
operator="EQUALS">2500</Criteria>  
  </filters>  
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" xml:lang="en" lang="en">
  <head profile="http://selenium-ide.openqa.org/profiles/test-case">
    <meta http-equiv="Content-Type" content="text/html;
charset=UTF-8" />
    <link rel="selenium.base" href="http://10.10.26.238" />
    <title>New Test</title>
  </head>
  <body>
    <table cellpadding="1" cellspacing="1" border="1">
      <thead>
        <tr>
          <td rowspan="1" colspan="3">New Test</td>
        </tr>
      </thead>
      <tbody>
        <tr>
          <td>open</td>
          <td>http://10.10.26.238/</td>
          <td/>
        </tr>
        <tr>
          <td>type</td>
          <td>name=login</td>
          <td>admin</td>
        </tr>
        <tr>
          <td>type</td>
          <td>name=password</td>
          <td>abc123</td>
        </tr>
        <tr>
          <td>clickAndWait</td>
          <td>name=submit</td>
          <td/>
        </tr>
      </tbody>
    </table>
  </body>
</html>
```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/webapp.xsd)/qps/xsd/3.0/was/webapp.xsd

## Reference: WebApp

The <WebApp> element includes sub elements used to define a web application. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) Web application ID. This element is assigned by the service and required for an update request.
removeFromSubscription	(Boolean) When set to true, deletes the web application asset from your subscription if the web application is not shared with other modules such as WAF. The “removeFromSubscription” flag is ignored if the web application that you want to remove from the subscription is shared with other modules. In that case, the Delete Web application API request with this flag set to true will only delete the web application from WAS and not from your subscription.
reactivateIfExists	<p>(Boolean) Set this parameter to “true” to create a web application with the same name and URL. In such a case, all the data of the old web application such as findings, detections, scans will be deleted. The new web application will have the same web application asset ID as the old web application.</p> <p>But if you try to create a web application with different URL but with a name that already exists in your subscription, then the API will return an error “Webapp with same name exists” in the response. The flag “reactivateIfExists” will be ignored even if it is set to true”.</p> <p>If this flag is not set to true and if you try to create a web application with the same name and URL, then we show this error message in the response: “We found in your subscription an existing asset that already uses the same name and URL. The asset is currently being used by the modules: Was, Waf. Please set flag reactivateIfExists to true to use that existing asset. If not, you will need to</p>

	change the name of the one you are trying to create.”
name	(text) The web application name (maximum 256 characters). This element is required to create a web application.
type	(keyword) Type of the finding: VULNERABILITY, SENSITIVE_CONTENT, or INFORMATION_GATHERED.
url	(text) The URL of the web application maximum 2048 characters). This element is required to create a web application.
os	(text) The operating system of the web application.
owner	(text) This element is assigned by the service and may be specified for an update request only.
config*	<p>Configure the cancel scan option. Specify “cancel after” time or “cancel at” time. Only one of &lt;cancelScansAfterNHours&gt; or &lt;cancelScansAt&gt; is allowed in one config section.</p> <p>Example for “cancel after” time:</p> <pre>&lt;config&gt;   &lt;cancelScansAfterNHours&gt;3 &lt;/cancelScansAfterNHours&gt; &lt;/config&gt;</pre> <p>Example for “cancel at” time:</p> <pre>&lt;config&gt;   &lt;cancelScansAt&gt;2017-06-10T12:00:00Z &lt;/cancelScansAt&gt; &lt;/config&gt;</pre> <p>Notes about updating web applications:</p> <ul style="list-style-type: none"> <li>- If none of the above elements are specified in the config section, the default cancel option is removed from the web app settings.</li> <li>- If the config section is not specified, no changes are made</li> </ul>

to the web app settings.

You can set one of the DNS override records that you assigned to your web application as the default record for the web application. The default DNS override setting is useful when you want to scan multiple web applications using the DNS override option. We will use the default DNS override record that you have set for your web applications to launch scan on them.

The parameter for setting the default DNS override is `config.defaultDnsOverride.id`. This parameter takes the ID of the DNS override record that you want to set as the default record.

This is an optional parameter.

Example:

```
<config>
  <defaultDnsOverride>
    <id>14620</id>
  </defaultDnsOverride>
</config>
```

attributes\*

Custom web application attributes.

Example:

```
<attributes>
  <set>
    <Attribute>
      <name>Custom key 1</name>
      <value><![CDATA[Custom value 1]]></value>
    </Attribute>
    <Attribute>
      <name>Custom key 2</category>
      <value><![CDATA[Custom value 2]]></value>
    </Attribute>
  </set>
</attributes>
```

tags*	<p>Tags assigned to the web application.</p> <p>Example:</p> <pre>&lt;tags&gt;   &lt;set&gt;     &lt;Tag&gt;       &lt;id&gt;12345&lt;/id&gt;     &lt;/Tag&gt;     &lt;Tag&gt;       &lt;id&gt;12345678&lt;/id&gt;     &lt;/Tag&gt;   &lt;/set&gt; &lt;/tags&gt;</pre>
comments	<p>(text) Comments on the web application.</p>
scope	<p>(keyword) The scanning scope for the web application: ALL (default), LIMIT, SUBDOMAIN or DOMAINS.</p> <ul style="list-style-type: none"><li>- If set to ALL, the scan will crawl all directories and sub-directories of the starting URL.</li><li>- If set to LIMIT, crawling will be limited to the starting URI's initial path and sub-directories.</li><li>- If set to SUBDOMAINS, any sub-domain that is in the same domain as the specified domain name will be crawled.</li><li>- If set to DOMAINS, only the specified domains will be crawled.</li></ul>
uris	<p>(text) Additional URLs to crawl. Each must be a valid HTTP or HTTPS URL consistent with the web application scope.</p>
swaggerFile	<p>Swagger-based REST API file that you want to scan for vulnerabilities. To scan the API, you need to specify the content of the Swagger/OpenAPI file in YAML or JSON format. Note that we support scanning single API at a time. For scanning Swagger-based REST APIs, the web application URL should point to the Swagger file host or</p>

OpenAPI server URL as per the API definition. Before adding the file content, you must encode the file content into base64 format. It is your responsibility to verify that you have permission to scan APIs that you specify as scan targets.

To remove the API file that you added to the web application, add a blank “swaggerFile” tag in the update web application request.

We currently only support Swagger API file version 2.0 and 3.0 in YAML or JSON format. The size of the file you upload should not exceed 5 MB.

Example:

```
<WebApp>
  <id>87452</id>
  ...
  <swaggerFile>
    <name>ajax.yml</name>
    <content>LS0tDQpzd2FnZ2
    VyOiAnMi4wJw0KaW5mbzoN...</content>
  </swaggerFile>
```

Note that the swaggerFile and postmanCollection tags are mutually exclusive and cannot be specified together in the request.

#### postmanCollection

Postman collection files that you want to scan for vulnerabilities. postmanCollection has 3 tags for specifying Postman Collection File content: “collection” for specifying Postman Collection File content, “environmentVariable” for specifying Postman Environment Variables File, and “globalVariable” for specifying Global Variables File. All these 3 tags are part of the “postmanCollection” tag. While creating the web application, the Postman Collection File is a mandatory parameter whereas specifying the Postman Environmental Variables and Postman Global Variables files is optional.

Note that before adding the file content, you must encode

the file content into base64 format.

You can remove the files by sending blank tags in the update request. To remove,

- Postman Environment Variables File, send a blank “environmentVariable” tag.

- Postman Global Variables File, send a blank “globalVariable” tag.

- Postman Collection File, send either a blank “postmanCollection” or “collection” tag. This will also remove the variables file if added.

We currently only support v2.0.0 and v2.1.0. for Postman Collection. The size of the file you upload should not exceed 5 MB.

```
<WebApp>
<id>87452</id>
...
<postmanCollection>
  <collection>
    <name>Mycollection.json</name>
    <content>ewoJlnZhcmlhYmx
lcydLAoJImlu...</content>
  </collection>
  <environmentVariable>
    <name>Myenvvariables</name>
    <content>ewoJImkljogljcxN
TBhYjlyLWE1MDQtNGEz...</content>
  </environmentVariable>
  <globalVariable>
    <name>myglobal.json</name>
    <content>ewogICJpZlwnNTY5Yzkz
YS02YzRjLWFkMDIt...</content>
  </globalVariable>
</postmanCollection>
```

Note that the swaggerFile and postmanCollection tags are mutually exclusive and cannot be specified together in the request..

malwareMonitoring	(boolean) A flag indicating whether Malware Monitoring is enabled for the web application.  Example:<malwareMonitoring>true</malwareMonitoring>
malwareNotification	(boolean) A flag indicating whether email notification is enabled for Malware Monitoring scans.  Example:<malwareNotification>true</malwareNotification>
malwareScheduling*	Schedule Malware Monitoring scans for your web application with various scheduling options.  <occurrenceType> can be set to one of: ONCE, HOURLY, DAILY, WEEKLY, MONTHLY.

### Scan Settings

defaultProfile*	The default option profile for scanning the web application. When unspecified, an option profile must be specified by the user for each scan.  <defaultProfile>  <id>139359</id>  <name><![CDATA[10 Links edit]]></name>  </defaultProfile>
defaultScanner*	The default scanner for the web application. A default scanner is optional.  For type (keyword) specify INTERNAL for a scanner appliance. If type is INTERNAL, specify friendlyName (text).  EXTERNAL for the external scanners or scannerTags for assigning multiple scanner appliances grouped by asset tag.  Example:

```
<defaultScanner>  
  <type>INTERNAL</type>  
  <friendlyName>dp_scanner</friendlyName>  
</defaultScanner>
```

proxy.id (integer) The default proxy for scanning the web application.

Example:

```
<proxy>  
  <id>12345</id>  
</proxy>
```

scannerLocked (boolean) A flag indicating whether the default scanner appliance is locked for the web application.

Example:

```
<scannerLocked>>false</scannerLocked>
```

dnsOverrides\* Assign DNS override settings, one or more records, to a web application.

Example:

```
<dnsOverrides>  
  <set>  
    <DnsOverride>  
      <id>2022</id>  
    </DnsOverride>  
  </set>  
</dnsOverrides>
```

useRobots (keyword) A flag indicating whether to observe the Robots.txt file and its directives if found when scanning the web application.

If set to IGNORE (default) the Robots.txt file is ignored.

If set to ADD\_PATHS, the “disallow” and “allow” directives in the Robots.txt file will be observed; this means these directives will be added as link hints for the crawler.

If set to BLACKLIST the “disallow” directives in the Robots.txt file will be observed; this means scans will not crawl matching links.

useSitemap (Boolean)	A flag indicating whether to adhere to a sitemap.xml file if present in the web application: true or false (default).
headers*	The headers that need to be injected by the scanning engine to scan the web application for complex authentication schemes or to impersonate a web browser.
urlBlacklist*	The URLs for the black list. These are web application links (URLs) that you do not want scanned. For each URL, specify UriEntry (text). If the attribute regex (Boolean) is set to “true” the service performs a regular expression match.
urlWhitelist*	<p>The URLs for the white list. These are web application links (URLs) that you want to be scanned.</p> <p>For each URL, specify UriEntry (text). If the attribute regex (Boolean) is set to “true” the service performs a regular expression match.</p>
postDataBlacklist*	<p>The web application URLs for which you want to block form submission (POST data), as this could have unwanted side effects.</p> <p>For each URL, specify UriEntry (text). The attribute regex (Boolean) can be set to “true” for a regular expression match.</p>
authRecords*	The web application authentication records. The WebAppAuthRecords element identifies a set of authentication instances (combination of form and types).
WebAppAuthRecord*	Under <authRecords>, this element identifies an authentication record assigned to the web application. Prior to WAS 3.1, authentication records and their settings were defined here using the Web Application API. Now you can manage authentication records using the Authentication API.

CrawlingScript

The selenium crawl script for your web application. The SeleniumScript element tells the selenium script details.

SeleniumScript

Under <CrawlingScript>, this element provides more information such as name of the script (text), start point of the crawl, if authentication is required or not, and such other details about the selenium script associated with the web application.

Example:

```
<crawlingScripts>
  <count>1</count>
  <list>
    <SeleniumScript>
      <id>2500</id>
      <name><![CDATA[name of the
Script]]></name>
      <data>      ....
      <requiresAuthentication>
        true
      </requiresAuthentication>
      <startingUrl>URL</startingUrl>
      <startingUrlRegex>
        true
      </startingUrlRegex>
    </SeleniumScript>
  </list> </crawlingScripts>
```

Elements Assigned by  
the Service

id	(integer) The web application ID.
owner	(text) The user login ID of the web application owner.
isScheduled	(boolean) Is a scan scheduled for the web application? (true or false).
createdBy	(text) The user who created the web application.
createdDate	(date) The date when the web application was created in WAS, in UTC date/time format.
updatedBy	(text) The user who last updated the web application.
updatedDate	(date) The date when the web application was last updated in WAS, in UTC date/time format.
lastScan	(text) The scan ID of the last scan run on the web application.
lastScan.status	(keyword) Scan status reported by last web application scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR or CANCELED

# Authentication

## Authentication Count

/qps/rest/3.0/count/was/webappauthrecord

[GET] [POST]

Returns the total number of authentication records in the user's scope. Input elements are optional and are used to filter the number of authentication records included in the count.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and Asset Management Permission "Read Asset". The output includes authentication records in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements

[Click here for available operators](#)

Parameter	Description
id	(integer) Authentication record ID.
name	(text) Authentication record name.
tags	(integer) Tag associated with the authentication record.
tags.name	(text) Tag name assigned to the authentication record.

tags.id	(integer) Tag ID assigned to the authentication record.
createdDate	(date) The date when the authentication record was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the authentication record was updated in WAS, in UTC date/time format.
lastScan.date	(date) The date when the web application (associated with the authentication record) was last scanned, in UTC date/time format.
lastScan.authStatus	(keyword) Authentication status reported by the last web application scan: NONE, NOT_USED, SUCCESSFUL, FAILED or PARTIAL
isUsed	(boolean) Indicates whether used by a web application or scan.
contents	(Keyword: FORM_STANDARD, FORM_CUSTOM, FORM_SELENIUM, SERVER_BASIC, SERVER_DIGEST, SERVER_NTLM, CERTIFICATE, OAUTH2_AUTH_CODE, OAUTH2_IMPLICIT, OAUTH2_PASSWORD, and OAUTH2_CLIENT_CREDS)

### Sample - Get count of authentication records in user's account

Return the number (count) of all authentication records in the user's scope.

#### API request

```
curl -u "USERNAME:PASSWORD"  
https://qualysapi.qualys.com/qps/rest/3.0/count/was/webappauthrecord/"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

## Authentication

```
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>3</count>
</ServiceResponse>
```

**Sample - Get count of authentication records with a criteria**

Return the number (count) authentication records that have a name that contains the term “server”.

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/webappauthrecord/"
< file.xml
```

Note: “file.xml” contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <filters>
    <Criteria field="name" operator="CONTAINS">server</Criteria>
  </filters>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
</ServiceResponse>
```

**XSD**

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd)/qps/xsd/3.0/was/webappauthrecord.xsd

## Search Authentication Record

/qps/rest/3.0/search/was/webappauthrecord

[POST]

Returns a list of authentication records which are in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes authentication records in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements

The special field=attributes attribute for the Criteria element is used to search custom attributes (see sample below).

[Click here for available operators](#)

Parameter	Description
id	(integer) Authentication record ID.
name	(text) Authentication record name.
tags	(integer) Tag associated with the authentication record.
tags.name	(text) Tag name assigned to the authentication record.
tags.id	(integer) Tag ID assigned to the authentication record.

createdDate	(date) The date when the authentication record was created in WAS, in UTC date/time format.
updatedAt	(date) The date when the authentication record was updated in WAS, in UTC date/time format.
lastScan.date	(date) The date when the web application (associated with the authentication record) was last scanned, in UTC date/time format.
lastScan.authStatus	(keyword) Authentication status reported by the last web application scan: NONE, NOT_USED, SUCCESSFUL, FAILED or PARTIAL
isUsed	(boolean) Indicates whether used by a web application or scan.
contents	(Keyword: FORM_STANDARD, FORM_CUSTOM, FORM_SELENIUM, SERVER_BASIC, SERVER_DIGEST, SERVER_NTLM, CERTIFICATE, OAUTH2_AUTH_CODE, OAUTH2_IMPLICIT, OAUTH2_PASSWORD, and OAUTH2_CLIENT_CREDS)

## Samples

[Sample - Search authentication records \(no criteria\)](#)

[Sample - Search for a particular authentication record](#)

[Sample - Search OAuth2 records with Implicit grant type](#)

### Sample - Search authentication records (no criteria)

Let us view a list of all authentication records in the user's scope.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/webappauthrecord
/"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0
/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>3</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WebAppAuthRecord>
      <id>82605</id>
      <name><![CDATA[Form Only]]></name>
      <owner>
        <id>630926</id>
        <username>username</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Smith]]></lastName>
      </owner>
      <tags>
        <count>3</count>
      </tags>
      <createdDate>2017-10-24T04:32:14Z</createdDate>
      <updatedAt>2017-10-24T07:45:05Z</updatedAt>
    </WebAppAuthRecord>
    <WebAppAuthRecord>
      <id>82606</id>
      ...
    </WebAppAuthRecord>
    <WebAppAuthRecord>
      <id>82607</id>
      ...
    </WebAppAuthRecord>
  </data>
</ServiceResponse>
```

### Sample - Search for a particular authentication record

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/webappauthrecord
/" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="id" operator="EQUALS">82605</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WebAppAuthRecord>
      <id>82605</id>
      <name>
        <![CDATA[Sample auth]]>
      </name>
      <owner>
        <id>75913465</id>
        <username>username</username>
        <firstName>
          <![CDATA[John]]>
        </firstName>
        <lastName>
          <![CDATA[Smith]]>
        </lastName>
      </owner>
      <tags>
        <count>0</count>
      </tags>
      <createdDate>2018-11-15T09:30:24Z</createdDate>
      <updatedAt>2018-11-15T09:30:24Z</updatedAt>
    </WebAppAuthRecord>
```

```
</data>  
</ServiceResponse>
```

## Sample - Search OAuth2 records with Implicit grant type

Let us search OAuth2 records with Implicit grant type by passing OAUTH2\_IMPLICIT keyword in the “contents” parameter.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/webappauthrecord  
/" < file.xml
```

Note: “file.xml” contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="contents"  
operator="IN">FORM_CUSTOM,SERVER_DIGEST,  
  OAUTH2_IMPLICIT</Criteria>  
  </filters>  
</ServiceRequest>  
<ServiceRequest>  
  <filters>  
    <Criteria field="contents" operator="EQUALS">OAUTH2_IMPLICIT  
  </Criteria>  
  </filters>  
</ServiceRequest>
```

### XML respons

### XSD

[<platform API server>/qps/xsd/3.0/was/webappauthrecord.xsd](#)

## Get Authentication Record Details

/qps/rest/3.0/get/was/webappauthrecord/<id>

[GET]

View details for an authentication record which is in the user's scope. Want to find a record ID to use as input? See [Search authentication records](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes authentication records in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the authentication record.

[Click here for available operators](#)

### Sample - View details for the authentication record

Let us view details for authentication record ID 74078.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webappauthrecord/74078"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd">  
<responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WebAppAuthRecord>  
      <id>74078</id>
```

```

<name><![CDATA[My Authentication Record]]></name>
<owner>
  <id>4354</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</owner>
<formRecord>
  <type>STANDARD</type>
  <sslOnly>>true</sslOnly>
  <fields>
    <count>2</count>
    <list>
      <WebAppAuthFormRecordField>
        <id>826453</id>
        <name><![CDATA[name1]]></name>
        <value><![CDATA[value]]></value>
      </WebAppAuthFormRecordField>
      <WebAppAuthFormRecordField>
        <id>826452</id>
        <name><![CDATA[name2]]></name>
        <value><![CDATA[value]]></value>
      </WebAppAuthFormRecordField>
    </list>
  </fields>
</formRecord>
<tags>
  <count>1</count>
  <list>
    <Tag>
      <id>1418973</id>
      <name><![CDATA[Cert Tag]]></name>
    </Tag>
  </list>
</tags>
<comments>
  <count>0</count>
</comments>
<createdDate>2017-09-23T20:21:04Z</createdDate>
<createdBy>
  <id>4354</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</createdBy>

```

```

<updatedAt>2017-10-22T05:48:57Z</updatedAt>
<updatedBy>
  <id>4354</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</updatedBy>
</WebAppAuthRecord>
</data>
</ServiceResponse>

```

## Sample - Password is masked

Let us fetch authentication record details with the password fields masked when sub user has disabled "View Password in Authentication Record" and "View/download Selenium Script sensitive contents" permissions.

### API request

```

curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webappauthrecord/761533"

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>
      <id>761533</id>
      <name><![CDATA[Selenium record]]></name>
      <owner>
        <id>75670165</id>
        <username>quays_js</username>
        <firstName>
          <![CDATA[John]]>
        </firstName>
        <lastName>
          <![CDATA[Smith]]>
        </lastName>
      </owner>
    </WebAppAuthRecord>
  </data>
</ServiceResponse>

```

```

<formRecord>
  <type>SELENIUM</type>
  <seleniumScript>
    <name>
      <![CDATA[seleniumScript]]>
    </name>
    <data>
      <![CDATA[
        <?xml version="1.0" encoding="UTF-8"?>
        <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0
Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
        <html xmlns="http://www.w3.org/1999/xhtml"
xml:lang="en" lang="en">
          <head>
            <meta http-equiv="Content-Type"
content="text/html; charset=UTF-8" />
            <link rel="selenium.base"
href="https://10.113.195.231/" />
            <title>AuthScript</title>
          </head>
          <body>
            <table cellpadding="1" cellspacing="1"
border="1">
              <thead>
                <tr>
                  <td rowspan="1"
colspan="3">AuthScript</td>
                </tr>
              </thead>
              <tbody>
                <tr>
                  <td>open</td>
                  <td>@@webappURL@@</td>
                  <td></td>
                </tr>
                <tr>
                  <td>click</td>
                  <td>name=username</td>
                  <td></td>
                </tr>
                <tr>
                  <td>type</td>
                  <td>name=username</td>
                  <td>*****</td>
                </tr>
              </tbody>
            </table>
          </body>
        </html>
      </![CDATA[

```

```

        <tr>
          <td>type</td>
          <td>name=password</td>
          <td>*****</td>
        </tr>
        <tr>
          <td>click</td>
          <td>name=Login</td>
          <td></td>
        </tr>
      </tbody>
    </table>
  </body></html>]]>
</data>
<regex>
  <![CDATA[selenium]]>
</regex>
</seleniumScript>
</formRecord>
<serverRecord>
  <fields>
    <count>3</count>
    <list>
      <WebAppAuthServerRecordField>
        <id>730020</id>
        <type>BASIC</type>
        <domain>
          <![CDATA[comp]]>
        </domain>
        <username>
          <![CDATA[abc]]>
        </username>
        <password>
          <![CDATA[*****]]>
        </password>
      </WebAppAuthServerRecordField>
      <WebAppAuthServerRecordField>
        <id>730021</id>
        <type>NTLM</type>
        <username>
          <![CDATA[abc3]]>
        </username>
        <password>
          <![CDATA[*****]]>
        </password>
    </list>
  </fields>
</serverRecord>

```

```

</WebAppAuthServerRecordField>
<WebAppAuthServerRecordField>
  <id>730022</id>
  <type>DIGEST</type>
  <domain>
    <![CDATA[comp2]]>
  </domain>
  <username>
    <![CDATA[abc2]]>
  </username>
  <password>
    <![CDATA[*****]]>
  </password>
</WebAppAuthServerRecordField>
</list>
</fields>
</serverRecord>
...
</updatedBy>
</WebAppAuthRecord>
</data>
</ServiceResponse>

```

### Sample - Password is visible

Let us fetch authentication record details with the password fields visible when sub user has disabled "View Password in Authentication Record" and "View/download Selenium Script sensitive contents" permissions.

#### API request

```

curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/webappauthrecord/76
1534"

```

#### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>

```

```

<id>762380</id>
<name>
  <![CDATA[Selenium with server authentication]]>
</name>
<owner>
  <id>75913465</id>
  <username>quays_js2</username>
  <firstName>
    <![CDATA[John]]>
  </firstName>
  <lastName>
    <![CDATA[Smith]]>
  </lastName>
</owner>
<formRecord>
  <type>SELENIUM</type>
  <seleniumScript>
    <name>
      <![CDATA[seleniumScript]]>
    </name>
    <data>
      <![CDATA[
        <?xml version="1.0" encoding="UTF-8"?>
        <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0
Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
        <html xmlns="http://www.w3.org/1999/xhtml"
xml:lang="en" lang="en">
          <head>
            <meta http-equiv="Content-Type"
content="text/html; charset=UTF-8" />
            <link rel="selenium.base"
href="https://10.113.195.231/" />
            <title>AuthScript</title>
          </head>
          <body>
            <table cellpadding="1" cellspacing="1"
border="1">
              <thead>
                <tr>
                  <td rowspan="1"
colspan="3">AuthScript</td>
                </tr>
              </thead>
              <tbody>
                <tr>

```

```

        <td>open</td>
        <td>@@webappURL@@</td>
        <td></td>
    </tr>
    <tr>
        <td>click</td>
        <td>name=username</td>
        <td></td>
    </tr>
    <tr>
        <td>type</td>
        <td>name=username</td>
        <td>theuser</td>
    </tr>
    <tr>
        <td>type</td>
        <td>name=password</td>
        <td>thepass</td>
    </tr>
    <tr>
        <td>click</td>
        <td>name=Login</td>
        <td></td>
    </tr>
</tbody>
</table>
</body></html>]]>
</data>
<regex>
    <![CDATA[selenium]]>
</regex>
</seleniumScript>
</formRecord>
<serverRecord>
    <fields>
        <count>3</count>
        <list>
            <WebAppAuthServerRecordField>
                <id>731073</id>
                <type>NTLM</type>
                <username>
                    <![CDATA[abc3]]>
                </username>
                <password>
                    <![CDATA[1234]]>
            </WebAppAuthServerRecordField>
        </list>
    </fields>
</serverRecord>

```

```

        </password>
    </WebAppAuthServerRecordField>
    <WebAppAuthServerRecordField>
        <id>731074</id>
        <type>BASIC</type>
        <domain>
            <![CDATA[comp]]>
        </domain>
        <username>
            <![CDATA[abc]]>
        </username>
        <password>
            <![CDATA[1234]]>
        </password>
    </WebAppAuthServerRecordField>
    <WebAppAuthServerRecordField>
        <id>731075</id>
        <type>DIGEST</type>
        <domain>
            <![CDATA[comp2]]>
        </domain>
        <username>
            <![CDATA[abc2]]>
        </username>
        <password>
            <![CDATA[1234]]>
        </password>
    </WebAppAuthServerRecordField>
</list>
</fields>
</serverRecord>
....
</updatedBy>
</WebAppAuthRecord>
</data>
</ServiceResponse>

```

## XSD

[<platform API server>/qps/xsd/3.0/was/webappauthrecord.xsd](#)

## Create Authentication Record

/qps/rest/3.0/create/was/webappauthrecord

[POST]

Creates a new authentication record.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and Asset Management Permission "Create Authentication Record". The output includes authentication records in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click [here](#) for descriptions of <WebApp> elements.

[Click here for available operators](#)

Parameter	Description
name	(text) Authentication record name.
WebAppAuthRecord	(text) Details associated with the web application authentication record.  Use these parameters to create OAuth2 authentication record:  WebAppAuthRecord.oauth2Record.grantType - (text) (Required if authentication type is OAuth2) Valid values are: 1) NONE, AUTH_CODE, IMPLICIT, PASSWORD, and CLIENT_CREDS. NONE means no grant type is selected.

## Qualys Web Application Scanning API Authentication

These are fields we support for each grant type:

1) AUTH\_CODE - We support these fields for Authorization Code: 1) seleniumScript, 2) redirectUrl, 3) accessTokenUrl, 4) clientId (optional), 5) clientSecret (optional), 6) scope, (optional) and 7) accessTokenExpiredMsgPattern (optional)

**Note:** Selenium script is mandatory for Authorization Code. We support parametrized username and password in the selenium script. See “Create a Selenium script to parameterize username and password” in the WAS API guide.

2) IMPLICIT - We support these fields for Implicit: 1) seleniumScript, and 2) redirectUrl

**Note::** Selenium script is mandatory for Implicit. We support parametrized username and password in the selenium script. See “Create a Selenium script to parameterize username and password” in the WAS API guide.

3) PASSWORD - We support these fields for Resource Owner Password Credentials: 1) accessTokenUrl, 2) username, 3) password, 4) clientId (optional), 5) clientSecret (optional), 6) scope (optional), and 7) accessTokenExpiredMsgPattern (optional)

4) CLIENT\_CREDS - We support these fields for Client Credentials: 1) accessTokenUrl, 2) clientId (optional), 3) clientSecret (optional), and 4) scope, (optional)

### **Note:**

When creating an authentication record, you can specify either a Form record (used for web application authentication) or an OAuth2 record (used for the Swagger/Open API file authentication) in the request. While updating an

authentication record,

- Send the Form record with type as NONE if you want to set an OAuth2 record instead of a form record.

- Send OAuth2 with grant type as NONE if you want to set a Form record instead of an OAuth2 record.

tags	(text) Tag associated with the authentication record.
------	---

comments	(text) User-defined comments.
----------	-------------------------------

## Samples

[Sample - Create a standard authentication record](#)

[Sample - Create a custom authentication record](#)

[Sample - Create a Selenium script](#)

[Sample - Create a Selenium script to parameterize username and password](#)

[Sample - Create server authentication](#)

[Sample: Create an OAuth2 authentication record with grant type as Client Credentials](#)

[Sample: Create an OAuth2 authentication record with Selenium script](#)

## Sample - Create a standard authentication record

Let us create a new web application called “My Web Application” that has the starting URL “http://mywebapp.com”. The default web application settings are assigned automatically.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webappauthrecord
" < file.xml
```

Note: "file.xml" contains the request POST data.

## Request POST data

```
<ServiceRequest>
  <data>
    <WebAppAuthRecord>
      <name><![CDATA[STANDARD auth]]></name>
      <formRecord>
        <type>STANDARD</type>
        <sslOnly>>true</sslOnly>
        <fields>
          <set>
            <WebAppAuthFormRecordField>
              <name>username</name>
              <value>john</value>
            </WebAppAuthFormRecordField>
            <WebAppAuthFormRecordField>
              <name>password</name>
              <value>secret</value>
            </WebAppAuthFormRecordField>
          </set>
        </fields>
      </formRecord>
      <tags>
        <set>
          <Tag>
            <id>152743</id>
          </Tag>
        </set>
      </tags>
      <comments>
        <set>
          <Comment><contents><![CDATA[some
comments]]></contents></Comment>
        </set>
      </comments>
    </WebAppAuthRecord>
  </data>
</ServiceRequest>
```

**XML response**

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>
      <id>80149</id>
      <name><![CDATA[STANDARD auth]]></name>
      <owner>
        <id>45941</id>
        <username>username</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Smith]]></lastName>
      </owner>
      <formRecord>
        <type>STANDARD</type>
        <sslOnly>>true</sslOnly>
        <fields>
          <count>2</count>
          <list>
            <WebAppAuthFormRecordField>
              <id>835050</id>
              <name><![CDATA[username]]></name>
              <value><![CDATA[john]]></value>
            </WebAppAuthFormRecordField>
            <WebAppAuthFormRecordField>
              <id>835051</id>
              <name><![CDATA[username]]></name>
              <value><![CDATA[jim]]></value>
            </WebAppAuthFormRecordField>
          </list>
        </fields>
      </formRecord>
    <tags>
      <count>1</count>
      <list>
        <Tag>
          <id>152743</id>
          <name><![CDATA[Asset Groups]]></name>
        </Tag>
      </list>
    </tags>
  </data>
</ServiceResponse>

```

```

<comments>
  <count>1</count>
  <list>
    <Comment>
      <contents><![CDATA[some comments]]></contents>
      <createdDate>2017-10-18T18:18:01Z</createdDate>
    </Comment>
  </list>
</comments>
<createdDate>2017-10-18T18:18:01Z</createdDate>
<createdBy>
  <id>45941</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</createdBy>
<updatedAt>2017-10-18T18:18:01Z</updatedAt>
<updatedBy>
  <id>45941</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</updatedBy>
</WebAppAuthRecord>
</data>
</ServiceResponse>

```

## Sample - Create a custom authentication record

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webappauthrecord
/" < file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <data>
    <WebAppAuthRecord>
      <name><![CDATA[CUSTOM auth]]></name>
      <formRecord>
        <type>CUSTOM</type>

```

```

<sslOnly>true</sslOnly>
<fields>
  <set>
    <WebAppAuthFormRecordField>
      <name>some username</name>
      <value>Login</value>
      <secured>>false</secured>
    </WebAppAuthFormRecordField>
    <WebAppAuthFormRecordField>
      <name>some password with true</name>
      <value>real password</value>
      <secured>true</secured>
    </WebAppAuthFormRecordField>
    <WebAppAuthFormRecordField>
      <name>not password with false</name>
      <secured>>false</secured>
      <value>fake password</value>
    </WebAppAuthFormRecordField>
  </set>
</fields>
</formRecord>
<comments>
  <set>
    <Comment><contents><![CDATA[some
comments]]></contents></Comment>
  </set>
</comments>
</WebAppAuthRecord>
</data>
</ServiceRequest>

```

## XML response

```

<<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>
      <id>685133</id>
      <name><![CDATA[CUSTOM auth]]></name>
      <owner>
        <id>75913465</id>

```

```

    <username>username</username>
    <firstName> <![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </owner>
  <formRecord>
    <type>CUSTOM</type>
    <sslOnly>>true</sslOnly>
    <fields>
      <count>3</count>
      <list>
        <WebAppAuthFormRecordField>
          <id>692981</id>
          <name><![CDATA[not password with
false]]></name>
          <secured>false</secured>
          <value><![CDATA[fake password]]></value>
        </WebAppAuthFormRecordField>
        <WebAppAuthFormRecordField>
          <id>692982</id>
          <name><![CDATA[some password with
true]]></name>
          <secured>true</secured>
          <value><![CDATA[*****]]></value>
        </WebAppAuthFormRecordField>
        <WebAppAuthFormRecordField>
          <id>692983</id>
          <name><![CDATA[some username]]></name>
          <secured>false</secured>
          <value><![CDATA[Login]]></value>
        </WebAppAuthFormRecordField>
      </list>
    </fields>
  </formRecord>
  <tags>
    <count>0</count>
  </tags>
  <comments>
    <count>1</count>
    <list>
      <Comment>
        <contents>
          <![CDATA[some comments]]>
        </contents>
        <createdDate>2018-11-
21T09:25:00Z</createdDate>

```

```
        </Comment>
      </list>
    </comments>
    <createdDate>2018-11-21T09:25:00Z</createdDate>
    <createdBy>
      <id>75913465</id>
      <username>username</username>
      <firstName>
        <![CDATA[John]]>
      </firstName>
      <lastName>
        <![CDATA[Smith]]>
      </lastName>
    </createdBy>
    <updatedAt>2018-11-21T09:25:00Z</updatedAt>
    <updatedBy>
      <id>75913465</id>
      <username>username</username>
      <firstName>
        <![CDATA[John]]>
      </firstName>
      <lastName>
        <![CDATA[Smith]]>
      </lastName>
    </updatedBy>
  </WebAppAuthRecord>
</data>
</ServiceResponse>
```

## Sample - Create a Selenium script

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webappauthrecord
/" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <WebAppAuthRecord>
```

```

<name><![CDATA[From API - Selenium]]></name>
<formRecord>
  <type>SELENIUM</type>
  <seleniumScript>
    <name><![CDATA[seleniumScriptOK]]></name>
    <data><![CDATA[<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" xml:lang="en" lang="en">
<head profile="http://selenium-ide.openqa.org/profiles/test-case">
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />
<link rel="selenium.base" href="https://community.qualys.com/" />
<title>seleniumScriptOK</title>
</head>
<body>
<table cellpadding="1" cellspacing="1" border="1">
<thead>
<tr><td rowspan="1" colspan="3">seleniumScriptOK</td></tr>
</thead><tbody>
<tr>
  <td>open</td>
  <td>https://community.qualys.com/index.jspa</td>
  <td></td>
</tr>
<tr>
  <td>clickAndWait</td>
  <td>css=#qc-homepage-cafe > span.qc-homepage-header-item-
title</td>
  <td></td>
</tr>
<tr>
  <td>clickAndWait</td>
  <td>link=Introduction to Qualys Mapping</td>
  <td></td>
</tr>
</tbody></table>
</body>
</html>]]></data>
    </seleniumScript>
  </formRecord>
</WebAppAuthRecord>
</data>
</ServiceRequest>

```

**XML response**

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>
      <id>307757</id>
      <name>
        <![CDATA[From API - Selenium]]>
      </name>
      <owner>
        <id>4354</id>
        <username>user_alice</username>
        <firstName>
          <![CDATA[Alice]]>
        </firstName>
        <lastName>
          <![CDATA[Smith]]>
        </lastName>
      </owner>
      <formRecord>
        <type>SELENIUM</type>
        <seleniumScript>
          <name>
            <![CDATA[seleniumScriptOK]]>
          </name>
          <data>
            <![CDATA[
              <?xml version="1.0" encoding="UTF-8"?>
              <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0
Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
              <html xmlns="http://www.w3.org/1999/xhtml"
xml:lang="en" lang="en">
                <head profile="http://selenium-
ide.openqa.org/profiles/test-case">
                  <meta http-equiv="Content-Type"
content="text/html; charset=UTF-8" />
                  <link rel="selenium.base"
href="https://community.qualys.com/" />
                  <title>seleniumScriptOK</title>
                </head>
                <body>

```

```

border="1">
    <table cellpadding="1" cellspacing="1"
        <thead>
            <tr>
                <td rowspan="1"
colspan="3">seleniumScriptOK</td>
            </tr>
        </thead>
        <tbody>
            <tr>
                <td>open</td>
                <td>https://community.qual
ys.com/index.jspa</td>
            </tr>
            <tr>
                <td>clickAndWait</td>
                <td>css=#qc-homepage-cafe
> span.qc-homepage-header-item-title</td>
            </tr>
            <tr>
                <td>clickAndWait</td>
                <td>link=Introduction to
Qualys Mapping</td>
            </tr>
        </tbody>
    </table>
</body></html>]]>
</data>
<regex>
    <![CDATA[selenium]]>
</regex>
</seleniumScript>
</formRecord>
<tags>
    <count>0</count>
</tags>
<comments>
    <count>0</count>
</comments>
<createdDate>2017-05-06T16:23:43Z</createdDate>
<createdBy>
    <id>4354</id>

```

```
<username>user_alex</username>
<firstName>
  <![CDATA[Alice]]>
</firstName>
<lastName>
  <![CDATA[Smith]]>
</lastName>
</createdBy>
<updatedAt>2017-05-06T16:23:43Z</updatedAt>
<updatedBy>
  <id>4354</id>
  <username>user_alex</username>
  <firstName>
    <![CDATA[Alice]]>
  </firstName>
  <lastName>
    <![CDATA[Smith]]>
  </lastName>
</updatedBy>
</WebAppAuthRecord>
</data>
</ServiceResponse>
```

## Sample - Create a Selenium script to parameterize username and password

When using selenium script for authentication, you have the option to parameterize the username and password. Specify the username and password in the authentication record and then during the scan, we will replace @@authusername@@ and @@authpassword@@ with this username and password. Add these 2 parameters: @@authusername@@ for username and @@authpassword@@ for password inside the Selenium script. The parameter names are case insensitive.

The advantage of using the parameters in the script is that you can change the login credentials without modifying your selenium script.

To use the parameters inside the selenium script, you need to set "seleniumCreds" to "true" in the authentication record. If you set the parameter to "false", then adding the placeholders in the script will return an error.

Let us create an authentication record of type Selenium script and add @@authusername@@ and @@authpassword@@ inside the selenium script and set the parameter "seleniumCreds" to "true".

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webappauthrecord
/" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <WebAppAuthRecord>
      <name><![CDATA[From API - Selenium]]></name>
      <formRecord>
        <type>SELENIUM</type>
        <seleniumScript>
          <name><![CDATA[seleniumScriptOK]]></name>
          <data><![CDATA[<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" xml:lang="en" lang="en">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />
<link rel="selenium.base" href="http://10.10.31.25/" />
<title>seleauth</title>
</head>
<body>
<table cellpadding="1" cellspacing="1" border="1">
<thead>
<tr><td rowspan="1" colspan="3">Untitled Test Case</td></tr>
</thead>
<tbody>
<tr><td>open</td><td>http://10.10.31.25/login_2/index.php</td><td></td>
</tr>
<tr><td>type</td><td>name=username</td><td>@@authusername@@</td>
</tr>
<tr><td>type</td><td>name=password</td><td>@@authpassword@@</td>
</tr>
```

```

<tr><td>click</td><td>css=input[type="submit"]</td><td></td>
</tr>
</tbody></table>
</body>
</html>]]></data>
    <regex><![CDATA[selenium]]></regex>
  </seleniumScript>
  <seleniumCreds>true</seleniumCreds>
  <fields>
    <set>
      <WebAppAuthFormRecordField>
        <name>username</name>
        <value>spp2</value>
      </WebAppAuthFormRecordField>
      <WebAppAuthFormRecordField>
        <name>password</name>
        <value>secret</value>
      </WebAppAuthFormRecordField>
    </set>
  </fields>
</formRecord>
</WebAppAuthRecord>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>
      <id>804942</id>
      <name>
        <![CDATA[From API - Selenium]]>
      </name>
      <owner>
        <id>5759808</id>
        <username>joe_user</username>
        <firstName>
          <![CDATA[Sunny]]>
        </firstName>

```

```

        <lastName>
            <![CDATA[Mirani]]>
        </lastName>
    </owner>
    <formRecord>
        <type>SELENIUM</type>
        <authVault>>false</authVault>
        <seleniumCreds>>true</seleniumCreds>
        <seleniumScript>
            <name>
                <![CDATA[
                    seleniumScriptOK
                ]]>
            </name>
            <data>
                <![CDATA[
                    <?xml version="1.0" encoding="UTF-8"?>
                    <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0
Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
                    <html xmlns="http://www.w3.org/1999/xhtml"
xml:lang="en" lang="en">
                        <head>
                            <meta http-equiv="Content-Type"
content="text/html; charset=UTF-8" />
                            <link rel="selenium.base"
href="http://10.10.31.25/" />
                            <title>seleauth</title>
                        </head>
                        <body>
                            <table cellpadding="1" cellspacing="1"
border="1">
                                <thead>
                                    <tr>
                                        <td rowspan="1"
colspan="3">Untitled Test Case</td>
                                    </tr>
                                </thead>
                                <tbody>
                                    <tr>
                                        <td>open</td>
                                        <td>http://10.10.31.25/log
in_2/index.php</td>
                                        <td></td>
                                    </tr>
                                </tbody>
                            </table>
                </data>
        </seleniumScript>
    </formRecord>

```

Authentication

```

        <td>type</td>
        <td>name=username</td>
        <td>@@authusername@@</td>
    </tr>
    <tr>
        <td>type</td>
        <td>name=password</td>
        <td>@@authpassword@@</td>
    </tr>
    <tr>
        <td>click</td>
        <td>css=input[type="submit
    </td></td>
    </tr>
</tbody>
</table>
</body></html>]]>
</data>
<regex>
    <![CDATA[
    selenium
    ]]>
</regex>
</seleniumScript>
<fields>
    <count>2</count>
    <list>
        <WebAppAuthFormRecordField>
            <id>860000</id>
            <name>
                <![CDATA[PASSWORD]]>
            </name>
            <secured>true</secured>
            <value>
                <![CDATA[*****]]>
            </value>
        </WebAppAuthFormRecordField>
        <WebAppAuthFormRecordField>
            <id>860001</id>
            <name>
                <![CDATA[USERNAME]]>
            </name>
            <secured>>false</secured>
            <value>

```

```

        <![CDATA[spp215]]>
        </value>
    </WebAppAuthFormRecordField>
</list>
</fields>
</formRecord>
<tags>
    <count>0</count>
</tags>
<comments>
    <count>0</count>
</comments>
<createdDate>2021-06-01T04:18:38Z</createdDate>
<createdBy>
    <id>5759808</id>
    <username>quays_ty55</username>
    <firstName>
        <![CDATA[joe]]>
    </firstName>
    <lastName>
        <![CDATA[user]]>
    </lastName>
</createdBy>
<updatedAt>2021-06-014T04:18:38Z</updatedAt>
<updatedBy>
    <id>5759808</id>
    <username>joe_user</username>
    <firstName>
        <![CDATA[joe]]>
    </firstName>
    <lastName>
        <![CDATA[user]]>
    </lastName>
</updatedBy>
</WebAppAuthRecord>
</data>
</ServiceResponse>

```

## Sample - Create server authentication

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-
```

```
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/webappauthrecord/" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebAppAuthRecord>
      <name><![CDATA[server auth]]></name>
      <serverRecord>
        <sslOnly>>true</sslOnly>
        <certificate>
          <name><![CDATA[My Certificate]]></name>
          <contents><![CDATA[-----BEGIN CERTIFICATE-----
MIIC4jCCAkugAwIBAgIJAPU+Kw6GX2aMMA0GCSqGSIb3DQEBBQUAMIGJMqswCQYD
VQQGEwJGUjEPMA0GA1UECAwGRnJhbmNlMREwDwYDVQQHDAhUb3Vsb3VzZTEPMA0G
A1UECgwGUXVhbHlzMRUwEwYDVQQLDAXRdWFnseXMgVGVjaC4xDTALBgNVBAMMBE5p
Y28xHzAdBgkqhkiG9w0BCQEWEG5iaXplQHF1YXx5cy5jb20wHhcNMTEwMjIx
...
-----END CERTIFICATE-----
-----BEGIN RSA PRIVATE KEY-----
MIICXAIBAAKBgQC4SiB/HaNxQtwQUtot867MxTP1PqAQh7VyHIIdBs037eafpd8B6
apHhIh0Jw0zr2RzcWniUUhhpvwL4apG470/RzkIKSNu4h9akHqA5b0Pe0ZasrE7B
MxUZWNf9dfrY+JXQmdaPce0i4w4zZR+PabXDy5Mg90NEUKS3AONCHK7acwIDAQAB
AoGAMHwAFLFdgLzQXNMPZ6uGv4TaaJkzT2YEzKLIyvY7e//Dt160GwDSph3Lqffh
...
-----END RSA PRIVATE KEY-----]]></contents>
          <passphrase>My Certificate</passphrase>
        </certificate>
      </serverRecord>
      <comments>
        <set>
          <Comment><contents><![CDATA[some
comments]]></contents></Comment>
        </set>
      </comments>
    </WebAppAuthRecord>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>
      <id>685134</id>
      <name>
        <![CDATA[server auth]]>
      </name>
      <owner>
        <id>75913465</id>
        <username>user_john</username>
        <firstName>
          <![CDATA[John]]>
        </firstName>
        <lastName>
          <![CDATA[Smith]]>
        </lastName>
      </owner>
      <serverRecord>
        <sslOnly>>true</sslOnly>
        <certificate>
          <name>
            <![CDATA[My Certificate]]>
          </name>
          <contents>
            <![CDATA[-----BEGIN CERTIFICATE-----
MIIC4jCCAkugAwIBAgIJAPU+Kw6GX2aMMA0GCSqGSIb3DQEBBQUAMIGJMQswCQYD
VQQGEwJGUjEPMA0GA1UECAwGRnJhbmNlMREwDwYDVQQHDAhUb3Vsb3VzZTEPMA0G
A1UECgwGUXVhbHlzMRUwEwYDVQQQLDAAxRdWFseXMgVGVjaC4xDTALBgNVBAMMBE5p
Y28xHzAdBgkqhkiG9w0BCQEWEG5iaXplQHF1YWx5cy5jb20wHhcNMTEwMDA1MjIx
OTQ5WhcNMTEwMDA1MjIxOTQ5WjCBITELMAkGA1UEBhMCRR1IXDZANBgNVBAgMBkZy
YW5jZTERMA8GA1UEBwwIVG91bG91c2UxDzANBgNVBAoMB1F1YWx5cy5jEVBMBGA1UE
CwwMUXVhbHlzIFR1Y2guMQ0wCwYDVQQDDAR0aWNvMR8wHQYJKoZIhvcNAQkBFhBu
Ym16ZUBxdWFseXMuY29tMIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQC4SiB/
HaNxQtwQUtot867MxTP1PqAQh7VyHI dBs037eafpd8B6apHh0Jw0zr2RzcwniU
UhhpvwL4apG470/RzkIKSNu4h9akHqA5b0Pe0ZasrE7BMxUZWNf9dfrY+JXQmdaP
ce0i4w4zZR+PabXDy5Mg9ONEUKS3AONCHk7acwIDAQABo1AwTjAdBgNVHQ4EFgQU
2MfOD/CeGujBKQGGaXTIoPPUPUowHwYDVR0jBBgwFoAU2MfOD/CeGujBKQGGaXTI
oPPUPUowDAYDVR0TBAAUwAwEB/zANBgkqhkiG9w0BAQUFAAOBgQCySmA+hoaTvm1V
RptWqID24SH3r4FQPR9wan/RcXbpTl5hwboauUspqwSmx/jKktsLy9VdLJLnF3NT
p/9U5TscI5d3Xw5EHKvcNnGFZwb5uc18jXhvEpUi+wWlGhIP6Nin3gdAcyxXYTCB
ILvK0dar1//cJZRn7+tRFFcw6keITQ==
]]>
          </contents>
        </certificate>
      </serverRecord>
    </WebAppAuthRecord>
  </data>
</ServiceResponse>

```

```
-----END CERTIFICATE-----
]]>
    </contents>
  </certificate>
  <fields>
    <count>0</count>
  </fields>
</serverRecord>
<tags>
  <count>0</count>
</tags>
<comments>
  <count>1</count>
  <list>
    <Comment>
      <contents>
        <![CDATA[some comments]]>
      </contents>
      <createdDate>2018-11-
21T09:41:59Z</createdDate>
    </Comment>
  </list>
</comments>
<createdDate>2018-11-21T09:41:59Z</createdDate>
<createdBy>
  <id>75913465</id>
  <username>user_john</username>
  <firstName>
    <![CDATA[John]]>
  </firstName>
  <lastName>
    <![CDATA[Smith]]>
  </lastName>
</createdBy>
<updatedAt>2018-11-21T09:41:59Z</updatedAt>
<updatedBy>
  <id>75913465</id>
  <username>username</username>
  <firstName>
    <![CDATA[John]]>
  </firstName>
  <lastName>
    <![CDATA[Smith]]>
  </lastName>
</updatedBy>
```

```
    </WebAppAuthRecord>  
  </data>  
</ServiceResponse>
```

## Sample - Create an OAuth2 authentication record with grant type as Client Credentials

### API request

```
curl -n -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/rest/3.0/create/was/webappauthrecord" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <WebAppAuthRecord>  
      <name><![CDATA[GrantType-Client-credentials-SPP]]></name>  
      <oauth2Record>  
        <grantType>CLIENT_CREDS</grantType>  
        <accessTokenUrl>http://www.authTokenUrl.com  
        </accessTokenUrl>  
        <clientId>clientIdVal</clientId>  
        <clientSecret>clientSecretVal</clientSecret>  
        <scope>scope</scope>  
      </oauth2Record>  
    </WebAppAuthRecord>  
  </data>  
</ServiceRequest>
```

## Sample - Create an OAuth2 authentication record with Selenium script

Let us create an OAuth2 authentication record with grant type Implicit that requires selenium script.

### API request

```
curl -n -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST" --  
data-binary @-
```

"https://qualysapi.qualys.com/rest/3.0/create/was/webappauthrecord" <file.xml

Note: "file.xml" contains the request POST data.

## Request POST data

```
<ServiceRequest>
  <data>
    <WebAppAuthRecord>
      <name>
        <![CDATA[OAuth2 and Server Auth Record]]>
      </name>
      <serverRecord>
        <sslOnly>>true</sslOnly>
        <fields>
          <set>
            <WebAppAuthServerRecordField>
              <type>DIGEST</type>
              <domain>realm</domain>
              <username>
                <![CDATA[username]]>
              </username>
              <password>password</password>
            </WebAppAuthServerRecordField>
          </set>
        </fields>
      </serverRecord>
      <oauth2Record>
        <grantType>IMPLICIT</grantType>
        <redirectUrl>http://www.redirectUrl.com</redirectUrl>
        <seleniumScript>
          <name>
            <![CDATA[seleniumScriptOK]]>
          </name>
          <data>
            <![CDATA[
              <?xml version="1.0" encoding="UTF-8"?>
              <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0
Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
              <html xmlns="http://www.w3.org/1999/xhtml"
xml:lang="en" lang="en">
                <head>
                  <meta http-equiv="Content-Type"
content="text/html; charset=UTF-8" />
            ]]>
          </data>
        </seleniumScript>
      </oauth2Record>
    </WebAppAuthRecord>
  </data>
</ServiceRequest>
```

```

        <link rel="selenium.base"
href="http://10.10.31.25/" />
        <title>seleauth</title>
    </head>
    <body>
        <table cellpadding="1" cellspacing="1"
border="1">
            <thead>
                <tr>
                    <td rowspan="1"
colspan="3">Untitled Test Case</td>
                </tr>
            </thead>
            <tbody>
                <tr>
                    <td>open</td>
                    <td>http://10.10.31.25/log
in_2/index.php</td>
                    <td></td>
                </tr>
                <tr>
                    <td>type</td>
                    <td>name=username</td>
                    <td>@@authusername@@</td>
                </tr>
                <tr>
                    <td>type</td>
                    <td>name=password</td>
                    <td>@@authpassword@@</td>
                </tr>
                <tr>
                    <td>click</td>
                    <td>css=input[type="submit
"]</td>
                    <td></td>
                </tr>
            </tbody>
        </table>
    </body></html>]]>
</data>
<regex>
    <![CDATA[selenium]]>
</regex>
</seleniumScript>
<seleniumCreds>true</seleniumCreds>

```

```
<username>uname</username>  
<password>pwd</password>  
</oauth2Record>  
</WebAppAuthRecord>  
</data>
```

## XSD

[platform API server](#)/qps/xsd/3.0/was/webappauthrecord.xsd

## Update Authentication Record

/qps/rest/3.0/update/was/webappauthrecord/<id>

[POST]

Update an authentication record which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes authentication records in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies an authentication record.

[Click here for available operators](#)

### Samples

[Sample - Update authentication record settings](#)

[Sample: Update a Form authentication record to OAuth2 record](#)

[Sample: Update a Form authentication record to OAuth2 record with selenium script](#)

### Sample - Update authentication record settings

Let us update the settings for authentication record ID 82605.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/webappauthrecord  
/82605" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebAppAuthRecord>
      <name><![CDATA[Form and Server Auth]]></name>
      <serverRecord>
        <sslOnly>>true</sslOnly>
        <fields>
          <set>
            <WebAppAuthServerRecordField>
              <type>DIGEST</type>
              <domain>realm</domain>
              <username><![CDATA[username]]></username>
              <password>password</password>
            </WebAppAuthServerRecordField>
          </set>
        </fields>
      </serverRecord>
      <formRecord>
        <type>STANDARD</type>
        <sslOnly>>true</sslOnly>
        <fields>
          <set>
            <WebAppAuthFormRecordField>
              <name>username</name>
              <value>Login</value>
            </WebAppAuthFormRecordField>
          </set>
        </fields>
      </formRecord>
    </WebAppAuthRecord>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
```

```
<data>
  <WebAppAuthRecord>
    <id>82605</id>
  </WebAppAuthRecord>
</data>
</ServiceResponse>
```

## Sample: Update a Form authentication record to OAuth2 record

Let us update a form authentication record to set OAuth2 record with Client Credentials grant type. If you want to set an OAuth2 record instead of a form record, then set the form record with type as NONE.

### API request

```
curl -n -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST" --
data-binary @-
"https://qualysapi.qualys.com/rest/3.0/update/was/webappauthrecord/826
09" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WebAppAuthRecord>
      <name><![CDATA[My Oauth Record]]></name>
      <serverRecord>
        <sslOnly>>true</sslOnly>
        <fields>
          <set>
            <WebAppAuthServerRecordField>
              <type>DIGEST</type>
              <domain>realm</domain>
              <username><![CDATA[username]]></username>
              <password>password</password>
            </WebAppAuthServerRecordField>
          </set>
        </fields>
      </serverRecord>
      <formRecord>
        <type>NONE</type>
      </formRecord>
      <oauth2Record>
        <grantType>CLIENT_CREDS</grantType>
```

```

    <accessTokenUrl>http://www.authTokenUrl.com
  </accessTokenUrl>
  <clientId>clientIdVal</clientId>
  <clientSecret>clientSecretVal</clientSecret>
  <scope>scope</scope>
</oauth2Record>
</WebAppAuthRecord>
</data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>
      <id>82609</id>
    </WebAppAuthRecord>
  </data>
</ServiceResponse>

```

### Sample: Update a Form authentication record to OAuth2 record with selenium script

Let us update a form authentication record to set OAuth2 record with grant type Implicit that requires selenium script. If you want to set an OAuth2 record instead of a form record, then set the form record with type as NONE.

### API request

```

curl -n -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/rest/3.0/update/was/webappauthrecord/826
22" < file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <data>

```

```

<WebAppAuthRecord>
  <name>
    <![CDATA[OAuth2 and Server Auth Record]]>
  </name>
  <serverRecord>
    <sslOnly>true</sslOnly>
    <fields>
      <set>
        <WebAppAuthServerRecordField>
          <type>DIGEST</type>
          <domain>realm</domain>
          <username>
            <![CDATA[username]]>
          </username>
          <password>password</password>
        </WebAppAuthServerRecordField>
      </set>
    </fields>
  </serverRecord>
  <oauth2Record>
    <grantType>IMPLICIT</grantType>
    <redirectUrl>http://www.redirectUrl.com</redirectUrl>
    <seleniumScript>
      <name>
        <![CDATA[seleniumScriptOK]]>
      </name>
      <data>
        <![CDATA[
          <?xml version="1.0" encoding="UTF-8"?>
          <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0
Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-
strict.dtd">
          <html xmlns="http://www.w3.org/1999/xhtml"
xml:lang="en" lang="en">
            <head>
              <meta http-equiv="Content-Type"
content="text/html; charset=UTF-8" />
              <link rel="selenium.base"
href="http://10.10.31.25/" />
              <title>seleauth</title>
            </head>
            <body>
              <table cellpadding="1" cellspacing="1"
border="1">
                <thead>

```

```

        <tr>
          <td rowspan="1"
colspan="3">Untitled Test Case</td>
        </tr>
      </thead>
      <tbody>
        <tr>
          <td>open</td>
          <td>http://10.10.31.25/log
in_2/index.php</td>
          <td></td>
        </tr>
        <tr>
          <td>type</td>
          <td>name=username</td>
          <td>@@authusername@@</td>
        </tr>
        <tr>
          <td>type</td>
          <td>name=password</td>
          <td>@@authpassword@@</td>
        </tr>
        <tr>
          <td>click</td>
          <td>css=input[type="submit
"]</td>
          <td></td>
        </tr>
      </tbody>
    </table>
  </body></html>]]>
</data>
<regex>
  <![CDATA[selenium]]>
</regex>
</seleniumScript>
<seleniumCreds>true</seleniumCreds>
<username>uname</username>
<password>pwd</password>
</oauth2Record>
</WebAppAuthRecord>
</data>
</ServiceRequest>

```

XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WebAppAuthRecord>
      <id>82622</id>
    </WebAppAuthRecord>
  </data>
</ServiceResponse>
```

## XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd)/qps/xsd/3.0/was/webappauthrecord.xsd

## Delete Authentication Record

/qps/rest/3.0/delete/was/webappauthrecord/<id>

/qps/rest/3.0/delete/was/webappauthrecord/<filters>

[POST]

Delete an authentication record which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The authentication record to be deleted must be within the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements

[Click here for available operators](#)

Parameter	Description
id	(integer) Authentication record ID.
name	(text) Authentication record name.
tags	(integer) Tag associated with the authentication record.
tags.name	(text) Tag name assigned to the authentication record.
tags.id	(integer) Tag ID assigned to the authentication record.
createdDate	(date) The date when the authentication record

was created in WAS, in UTC date/time format.

updatedDate	(date) The date when the authentication record was updated in WAS, in UTC date/time format.
lastScan.date	(date) The date when the web application (associated with the authentication record) was last scanned, in UTC date/time format.
lastScan.authStatus	(keyword) Authentication status reported by the last web application scan: NONE, NOT_USED, SUCCESSFUL, FAILED or PARTIAL
isUsed	(boolean) Indicates whether used by a web application or scan.
contents	(Keyword: FORM_STANDARD, FORM_CUSTOM, FORM_SELENIUM, SERVER_BASIC, SERVER_DIGEST, SERVER_NTLM, CERTIFICATE, OAUTH2_AUTH_CODE, OAUTH2_IMPLICIT, OAUTH2_PASSWORD, and OAUTH2_CLIENT_CREDS)

## Sample - Delete a single authentication record

Let us delete authentication record ID 78149.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" "https://qualysapi.qualys.com/qps/rest/3.0/delete/was/webappauthrecord/78149"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/webappauthrecord.xsd">
<responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
```

```
<WebAppAuthRecord>
  <id>78149</id>
</WebAppAuthRecord>
</data>
</ServiceResponse>
```

## Sample - Delete multiple authentication records

Let us delete authentication records that have a name containing the term “server”.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/webappauthrecord
/" < file.xml
Note: “file.xml” contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="name" operator="CONTAINS">server</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/webappauthrecord.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <data>
    <WebAppAuthRecord>
      <id>12874</id>
    <WebAppAuthRecord>
    <WebAppAuthRecord>
      <id>13093</id>
    <WebAppAuthRecord>
  </data>
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/webappauthrecord.xsd)/qps/xsd/3.0/was/webappauthrecord.xsd

## Reference: Authentication

The <WebAppAuthRecord> element includes sub elements used to define authentication record. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) Authentication record ID.
name	(text) Authentication record name.
tags	(integer) Tag associated with the authentication record.
tags.name	(text) Tag name assigned to the authentication record.
tags.id	(integer) Tag ID assigned to the authentication record.
createdDate	(date) The date when the authentication record was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the authentication record was updated in WAS, in UTC date/time format.
lastScan.date	(date) The date when the web application (associated with the authentication record) was last scanned, in UTC date/time format.
lastScan.authStatus	(keyword) Authentication status reported by the last web application scan: NONE, NOT_USED, SUCCESSFUL, FAILED or PARTIAL
isUsed	(boolean) Indicates whether used by a web application or scan.
contents	(Keyword: FORM_STANDARD, FORM_CUSTOM,

FORM\_SELENIUM, SERVER\_BASIC,  
SERVER\_DIGEST, SERVER\_NTLM, CERTIFICATE,  
OAUTH2\_AUTH\_CODE, OAUTH2\_IMPLICIT,  
OAUTH2\_PASSWORD, and  
OAUTH2\_CLIENT\_CREDS)

WebAppAuthRecord (text) Details associated with the web application authentication record.

Use these parameters to create/update OAuth2 authentication record:

WebAppAuthRecord.oauth2Record.grantType - (Required if authentication type is OAuth2)(text)  
Valid values are: 1) NONE, AUTH\_CODE, IMPLICIT, PASSWORD, and CLIENT\_CREDS. NONE means no grant type is selected.

These are fields we support for each grant type:

1) AUTH\_CODE - We support these fields for Authorization Code: 1) seleniumScript, 2) redirectUrl, 3) accessTokenUrl, 4) clientId (optional), 5) clientSecret (optional), 6) scope, (optional) and 7) accessTokenExpiredMsgPattern (optional)

**Note:** Selenium script is mandatory for Authorization Code. We support parametrized username and password in the selenium script. See “Create a Selenium script to parameterize username and password” in the WAS API guide.

2) IMPLICIT - We support these fields for Implicit: 1) seleniumScript, and 2) redirectUrl

**Note:** Selenium script is mandatory for Implicit. We support parametrized username and password in the selenium script. See “Create a Selenium script to parameterize username and password” in the WAS API guide.

3) PASSWORD - We support these fields for

## Qualys Web Application Scanning API Authentication

Resource Owner Password Credentials: 1) accessTokenUrl, 2) username, 3) password, 4) clientId (optional), 5) clientSecret (optional), 6) scope (optional), and 7) accessTokenExpiredMsgPattern (optional)

4) CLIENT\_CREDS - We support these fields for Client Credentials: 1) accessTokenUrl, 2) clientId (optional), 3) clientSecret (optional), and 4) scope, (optional)

### Note:

When creating an authentication record, you can specify either a Form record (used for web application authentication) or an OAuth2 record (used for the Swagger/Open API file authentication) in the request. While updating an authentication record,

- Send the Form record with type as NONE if you want to set an OAuth2 record instead of a form record.

- Send OAuth2 with grant type as NONE if you want to set a Form record instead of an OAuth2 record.

comments

(text) User-defined comments.

# Catalog

## Catalog Entry Count

`/qps/rest/3.0/count/was/catalog`

[GET] [POST]

Returns the total number of catalog entries in the user's scope.

Permissions required - You must have the WAS module enabled. You must have the "API access" and "Access WAS module" permissions. You must have the "WAS.CATALOG.ACCESS" permission.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the catalog entry.
ipAddress	(integer) The IP address of the discovered host. We support wild card character * for numbers in IP Address. For example, 10.11.196.* or 10.11.*.* are valid patterns for IP address.  Examples of Invalid patterns:*1.123.123.123, 1*1.123.123.123 and 1*.123.123.123
port	(integer) The port number of the discovered service.
source	(text) The source of the catalog entries. Valid values are: VM_SCAN, VM_MAP, and WAS_SCAN.

Status	(text) The status of the entry. Valid values are NEW, ROGUE, APPROVED, IGNORED, IN_SUBSCRIPTION.
operatingSystem	(text) The operating system of discovered host.
netbiosName	(text) The NetBIOS name of the discovered host.
fqdn	(text) The fully qualified domain name of the discovered host.
createdDate	(date) The date and time when the catalog entry is created. The date format is YYYY-MM-DDTHH:MM:SSZ. For example: 2018-05-18T10:33:54Z
UpdatedDate	(date) The updated date and time when the catalog entry is updated. The date format is YYYY-MM-DDTHH:MM:SSZ. For example: 2018-05-18T10:33:54Z.

### Sample - Get count of catalog entries (no criteria)

Returns the number (count) of all catalog entries in the user's scope.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/catalog"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/catalog.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1355</count>
</ServiceResponse>
```

## Search for a Catalog Entry

qps/rest/3.0/search/was/catalog

[POST]

Returns a list of catalog entries based on the search criteria.

Permissions required - You must have the WAS module enabled. You must have the "API access" and "Access WAS module" permissions. You must have the "WAS.CATALOG.ACCESS" permission.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the catalog entry.
ipAddress	(integer) The IP address of the discovered host. We support wild card character * for numbers in IP Address. For example, 10.11.196.* or 10.11.*.* are valid patterns for IP address.  Examples of Invalid patterns:*1.123.123.123, 1*1.123.123.123 and 1*.123.123.123
port	(integer) The port number of the discovered service.
source	(text) The source of the catalog entries. Valid values are: VM_SCAN, VM_MAP, and WAS_SCAN.
Status	(text) The status of the entry. Valid values are NEW, ROGUE, APPROVED, IGNORED, IN_SUBSCRIPTION.

operatingSystem	(text) The operating system of discovered host.
netbiosName	(text) The NetBIOS name of the discovered host.
fqdn	(text) The fully qualified domain name of the discovered host.
createdDate	(date) The date and time when the catalog entry is created. The date format is YYYY-MM-DDTHH:MM:SSZ. For example: 2018-05-18T10:33:54Z
UpdatedDate	(date) The updated date and time when the catalog entry is updated. The date format is YYYY-MM-DDTHH:MM:SSZ. For example: 2018-05-18T10:33:54Z.

## Sample - Search for catalog entries

Let us view all catalog entries in the user's scope for IP address that contains wild card character .

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/search/was/catalog" <file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="ipAddress"
      operator="EQUALS">10.113.*.*</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/catalog.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <Catalog>
      <id>306909</id>
      <ipAddress>10.113.196.192</ipAddress>
      <port>443</port>
      <operatingSystem>Ubuntu / Fedora / Tiny Core Linux / Linux
        3.x</operatingSystem>
      <source>VM_SCAN</source>
      <status>ROGUE</status>
      <createdDate>2018-05-18T10:33:55Z</createdDate>
      <updatedAtDate>2020-05-19T13:50:08Z</updatedAtDate>
      <updatedBy>
        <id>1918433</id>
        <username>qualys_joe</username>
        <firstName>
          <![CDATA[qualys]]>
        </firstName>
        <lastName>
          <![CDATA[joe]]>
        </lastName>
      </updatedBy>
    </Catalog>
    <Catalog>
      <id>306906</id>
      <ipAddress>10.113.196.18</ipAddress>
      <port>80</port>
      <operatingSystem>Windows XP Service Pack
2</operatingSystem>
      <source>VM_SCAN</source>
      <fqdn>10-113-196-18.bogus.tld</fqdn>
      <netbiosName>SYS_10_113_196_18</netbiosName>
      <status>ROGUE</status>
      <createdDate>2018-05-18T10:33:55Z</createdDate>
      <updatedAtDate>2020-05-19T13:50:08Z</updatedAtDate>
      <updatedBy>
        <id>1918433</id>
        <username>qualys_joe</username>
        <firstName>
          <![CDATA[qualys]]>

```

```
        </firstName>  
        <lastName>  
            <![CDATA[joe]]>  
        </lastName>  
    </updatedBy>  
</Catalog>  
</data>  
</ServiceResponse>
```

## Get Catalog Entry Details

`/qps/rest/3.0/get/was/catalog/{id}`

[GET]

View the details of a catalog entry that is in your scope. In the output, "Comment" tag will show the comment added by the system and comment added by you.

Permissions required - You must have the WAS module enabled. You must have the "API access" and "Access WAS module" permissions. You must have the "WAS.CATALOG.ACCESS" permission.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the catalog entry.

### Sample - View details of a catalog entry

Let us view details for the catalog entry with the ID 306904..

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/catalog/306904"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/catalog.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Catalog>  
      <id>306904</id>  
      <ipAddress>10.113.196.17</ipAddress>  
      <port>80</port>
```

```

<operatingSystem>MacOS X 9.0.0</operatingSystem>
<source>VM_SCAN</source>
<fqdn>10-113-196-17.bogus.tld</fqdn>
<netbiosName>SYS_10_113_196_17</netbiosName>
<status>NEW</status>
<comments>
  <count>4</count>
  <list>
    <Comment>
      <contents>
        <![CDATA[Web Application added from scan
consolidated data from VM]]>
      </contents>
      <createdDate>2018-05-
18T10:33:55Z</createdDate>
    </Comment>
    <Comment>
      <contents>
        <![CDATA[asdasd]]>
      </contents>
      <author>
        <id>1918433</id>
        <username>qualys_joe</username>
        <firstName>
          <![CDATA[qualys]]>
        </firstName>
        <lastName>
          <![CDATA[joe]]>
        </lastName>
      </author>
      <createdDate>2020-10-
22T07:47:25Z</createdDate>
    </Comment>
    <Comment>
      <contents>
        <![CDATA[Entry added to subscription as
'Catalog Web Application: 10-113-196-17.bogus.tld, Port 80']]>
      </contents>
      <createdDate>2020-10-
12T10:16:45Z</createdDate>
    </Comment>
  </list>
</comments>
<createdDate>2018-05-18T10:33:55Z</createdDate>
<updatedAt>2020-10-22T07:47:25Z</updatedAt>

```

```
<updatedBy>
  <id>1918433</id>
  <username>qualys_joe</username>
  <firstName>
    <![CDATA[qualys]]>
  </firstName>
  <lastName>
    <![CDATA[joe]]>
  </lastName>
</updatedBy>
</Catalog>
</data>
</ServiceResponse>
```

## Update Catalog Entry

qps/rest/3.0/update/was/catalog/{id}

[POST]

Updates the status and comments for a catalog entry which is in your scope. Want to find an ID of a catalog entry to use as input? See Search catalog entries.

Permissions required - You must have the WAS module enabled. You must have the "API access" and "Access WAS module" permissions. You must have the "WAS.CATALOG.ACCESS" and "WAS.CATALOG.ENTRY.UPDATE" permissions.

### Input Parameters

Parameter	Description
id	(integer) The element "id" is required, where "id" identifies a catalog entry.
status	(text) This is an optional parameter. The status can be updated to one of these statuses: ROGUE, NEW, APPROVED and IGNORED. IN_SUBSCRIPTION status can not be updated using the Update API.
Comments	(text) This is an optional parameter. You can add comments but you can not update/delete existing comments.

### Sample - Search for catalog entries

Let us view all catalog entries in the user's scope for IP address that contains wild card character .

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/catalog/368106"
<
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <Catalog>
      <status>ROGUE</status>
      <comments>
        <add>
          <Comment>
            <contents>
              <![CDATA[Comment 1]]>
            </contents>
          </Comment>
        </add>
      </comments>
    </Catalog>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/catalog.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Catalog>
      <id>368106</id>
    </Catalog>
  </data>
</ServiceResponse>
```

## Delete Catalog Entry

/qps/rest/3.0/delete/was/catalog/{id}

[POST]

Deletes a catalog entry which is in your scope. Want to find an ID of a catalog entry to use as input? See Search catalog entries.

Permissions required - You must have the WAS module enabled. You must have the "API access" and "Access WAS module" permissions. You must have the "WAS.CATALOG.ACCESS" and "WAS.CATALOG.ENTRY.DELETE" permissions.

### Input Parameters

The element "id" (integer) is required, where "id" identifies a catalog entry.

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the catalog entry.
ipAddress	(integer) The IP address of the discovered host. We support wild card character * for numbers in IP Address. For example, 10.11.196.* or 10.11.*.* are valid patterns for IP address.  Examples of Invalid patterns:*1.123.123.123, 1*1.123.123.123 and 1*.123.123.123
port	(integer) The port number of the discovered service.
source	(text) The source of the catalog entries. Valid values

are: VM\_SCAN, VM\_MAP, and WAS\_SCAN.

Status	(text) The status of the entry. Valid values are NEW, ROGUE, APPROVED, IGNORED, IN_SUBSCRIPTION.
operatingSystem	(text) The operating system of discovered host.
netbiosName	(text) The NetBIOS name of the discovered host.
fqdn	(text) The fully qualified domain name of the discovered host.
createdDate	(date) The date and time when the catalog entry is created. The date format is YYYY-MM-DDTHH:MM:SSZ. For example: 2018-05-18T10:33:54Z
UpdatedDate	(date) The updated date and time when the catalog entry is updated. The date format is YYYY-MM-DDTHH:MM:SSZ. For example: 2018-05-18T10:33:54Z.

## Sample - Delete a catalog entry

Let us delete a catalog entry with ID 368106.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" "https://qualysapi.qualys.com/qps/rest/3.0/delete/was/catalog/368106"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/catalog.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Catalog>
      <id>368106</id>
    </Catalog>
  </data>
</ServiceResponse>
```

```
</data>  
</ServiceResponse>
```

## Update Entries in Catalog

`/qps/rest/3.0/updateEntries/was/catalog`

[POST]

Updates the entries in the catalog to add data discovered in the most recent VM scan results within your account.

Permissions required - You must have the WAS module enabled. You must have the "API access" and "Access WAS module" permissions. You must have the "WAS.CATALOG.ACCESS" and "WAS.CATALOG.UPDATE" permissions.

### Sample - Update entries in the catalog

Let us delete a catalog entry with ID 368106.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
"https://qualysapi.qualys.com/qps/rest/3.0/updateEntries/was/catalog"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/catalog.xsd">
  <responseCode>SUCCESS</responseCode>
</ServiceResponse>
```

## Add to Subscription

/qps/rest/3.0/addToSubscription/was/catalog/{id}

[POST]

Adds a web application entry to subscription to create a web application.

Permissions required - You must have the WAS module enabled. You must have the "API access" and "Access WAS module" permissions. You must have the "WAS.CATALOG.ACCESS" and "WAS.CATALOG.ENTRY.ADD\_TO\_SUBSCRIPTION" permissions.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the catalog entry.

### Sample - Add a catalog entry to subscription

Let us add the catalog entry with id 306904 to subscription..

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
"https://qualysapi.qualys.com/qps/rest/3.0/addToSubscription/was/catalog/306904"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/version.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <success>
      <ids>413904,413906</ids>
      <count>1</count>
    </success>
  </data>
</ServiceResponse>
```

```
</success>
<duplicate>
  <count>1</count>
  <ids>413905</ids>
</duplicate>
<error>
  <count>2</count>
  <errorMessage>Invalid URL for web application catalog
  entries: 413907Some error occurred for web application
  catalog entries:413908
  </errorMessage>
</error>
</data>
</ServiceResponse>
```

# Scans

## Scan Count

`/qps/rest/3.0/count/was/wasscan`

[GET] [POST]

Returns the total number of scans in the user's account. Input elements are optional and are used to filter the number of scans included in the count.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The count includes scans in the user's scope.

## Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) The scan ID.
name	(text) The scan name.
webApp.name	(text) The name of the web application being scanned.
webApp.id	(integer) The ID of the web application being scanned.
webApp.tags (with operator="NONE")	(integer) The tags associated with the web application being scanned.
webApp.tags.id	(integer) The tag ID assigned to web application being scanned.

reference	(text) Scan Reference ID.
launchedDate	(date) The date and time when the scan was launched in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).
type	(keyword) The scan type: VULNERABILITY or DISCOVERY.
mode	(keyword) The mode of the scan: ONDEMAND, SCHEDULED or API.
status	(keyword) The status of the scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR or CANCELED.
authStatus	(Keyword) Indicates the status of the authentication record: NONE, NOT_USED, SUCCESSFUL, FAILED or PARTIAL.
resultsStatus	(keyword) The status of the scan: NOT_USED, NO_HOST_ALIVE, NO_WEB_SERVICE, PROCESSING, SCAN_RESULTS_INVALID, TIME_LIMIT_REACHED, SERVICE_ERROR, SCAN_INTERNAL_ERROR, SUCCESSFUL, TO_BE_PROCESSED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, SUBMITTED, RUNNING, FINISHED, CANCELED, CANCELING ERROR, DELETED.

### Sample - Get count of scans in user's account

Return a count of all scans in the user's account.

#### API request

```
curl -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/wasscan"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/wasscan.xsd">  
  <responseCode>SUCCESS</responseCode>
```

```
<count>534</count>
</ServiceResponse>
```

## Sample - Get count of scans with certain criteria

Return a count of scans that match all the criteria defined in the request POST data: 1) scan name contains the word “Schedule”, 2) scan type is “VULNERABILITY”, 3) the scanned web application contains the word “Merchant”, and 4) the scan status is equal to “FINISHED”.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/wasscan" <
file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="name" operator="CONTAINS">Schedule</Criteria>
    <Criteria field="type" operator="EQUALS">VULNERABILITY</Criteria>
    <Criteria field="webApp.name"
operator="CONTAINS">Merchant</Criteria>
    <Criteria field="status" operator="EQUALS">FINISHED</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
</ServiceResponse>
```

## Sample - Get the count of scans of web applications without tags

Return a count of scans of web applications that do not have any tags assigned.

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/wasscan" <
file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <filters>
    <Criteria field="webApp.tags" operator="NONE"></Criteria>
  </filters>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/
xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
</ServiceResponse>
```

**Sample - Get the count of scans of web applications with few tags**

Return a count of scans of web applications that have certain tags assigned.

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/wasscan" <
file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <filters>
    <Criteria field="webApp.tags.id"
operator="EQUALS">1516928</Criteria>
```

```
<Criteria field="webApp.tags.id"
operator="EQUALS">1234567</Criteria>
</filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/
xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>15</count>
</ServiceResponse>
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd)/qps/xsd/3.0/was/wasscan.xsd

## Search Scans

/qps/rest/3.0/search/was/wasscan

[POST]

Returns a list of scans on web applications which are in the user's scope

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes scans in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements

The special field=attributes attribute for the Criteria element is used to search custom attributes (see sample below).

[Click here for available operators](#)

Parameter	Description
id	(integer) The scan ID.
name	(text) The scan name.
webApp.name	(text) The name of the web application being scanned.
webApp.id	(integer) The ID of the web application being scanned.
webApp.tags (with operator="NONE")	(integer) The tags associated with the web application being scanned.
webApp.tags.id	(integer) The tag ID assigned to web application being scanned.

reference	(text) Scan Reference ID.
launchedDate	(date) The date and time when the scan was launched in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).
type	(keyword) The scan type: VULNERABILITY or DISCOVERY.
mode	(keyword) The mode of the scan: ONDEMAND, SCHEDULED or API.
status	(keyword) The status of the scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR or CANCELED.
authStatus	(keyword) Indicates the status of the authentication record: NONE, NOT_USED, SUCCESSFUL, FAILED or PARTIAL.
resultsStatus	(keyword) The status of the scan: NOT_USED, NO_HOST_ALIVE, NO_WEB_SERVICE, PROCESSING, SCAN_RESULTS_INVALID, TIME_LIMIT_REACHED, SERVICE_ERROR, SCAN_INTERNAL_ERROR, SUCCESSFUL, TO_BE_PROCESSED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, SUBMITTED, RUNNING, FINISHED, CANCELED, CANCELING_ERROR, DELETED.

## Sample - List running scans

Let us view a list of all running scans in the user's account.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscan" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
```

```

    <Criteria field="status" operator="EQUALS">RUNNING</Criteria>
  </filters>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0
/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WasScan>
      <id>13101</id>
      <name><![CDATA[Vulnerability Scan - 2017-02-24]]></name>
      <reference>was/1298538355659.20994</reference>
      <type>VULNERABILITY</type>
      <mode>ONDEMAND</mode>
      <profile>
        <id>1072</id>
        <name><![CDATA[Initial WAS Options]]></name>
      </profile>
      <launchedDate>2017-02-24T10:05:55Z</launchedDate>
      <launchedBy>
        <id>123056</id>
        <username>username</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Smith]]></lastName>
      </launchedBy>
      <status>RUNNING</status>
    </WasScan>
    <WasScan>
      <id>13102</id>
      <name><![CDATA[Vulnerability Scan - 2017-02-24]]></name>
      <reference>was/1298541157873.20995</reference>
      <type>VULNERABILITY</type>
      <mode>ONDEMAND</mode>
      <profile>
        <id>1072</id>
        <name><![CDATA[Initial WAS Options]]></name>
      </profile>
      <launchedDate>2017-02-24T10:52:37Z</launchedDate>
      <launchedBy>

```

```

    <id>123056</id>
    <username>username</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </launchedBy>
  <status>RUNNING</status>
</WasScan>
</data>
</ServiceResponse>

```

## Sample - List scans with successful authentication

Let us view a list of scans in the user's account that successfully authenticated to the target web application.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscan" <
file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="authStatus"
operator="EQUALS">SUCCESSFUL</Criteria>
  </filters>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WasScan>
      <id>13096</id>
      <name><![CDATA[Web Vulnerability Scan - 2017-02-23]]></name>

```

```

<reference>was/1298475533625.20931</reference>
<type>VULNERABILITY</type>
<mode>ONDEMAND</mode>
<profile>
  <id>1072</id>
  <name><![CDATA[Initial WAS Options]]></name>
</profile>
<launchedDate>2017-02-23T16:38:53Z</launchedDate>
<launchedBy>
  <id>123056</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</launchedBy>
<status>FINISHED</status>
</WasScan>
<WasScan>
  <id>13116</id>
  <name><![CDATA[Relaunch Vulnerability Scan - 2017-02-
23]]></name>
  <reference>was/1298558684177.21009</reference>
  <type>VULNERABILITY</type>
  <mode>ONDEMAND</mode>
  <profile>
    <id>1072</id>
    <name><![CDATA[Initial WAS Options]]></name>
  </profile>
  <launchedDate>2017-02-24T15:44:44Z</launchedDate>
  <launchedBy>
    <id>123056</id>
    <username>username</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </launchedBy>
  <status>FINISHED</status>
</WasScan>
</data>
</ServiceResponse>

```

## Sample - List scans for web applications without tags

Return a list of scans of web applications that do not have any tags assigned.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscan" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="webApp.tags" operator="NONE"></Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WasScan>
      <id>2208317</id>
      <name>
        <![CDATA[1538976557822_Scan16]]>
      </name>
      <reference>was/1538976670564.372113</reference>
      <type>VULNERABILITY</type>
      <mode>API</mode>
      <multi>>false</multi>
      <target>
        <webApp>
          <id>1472824</id>
          <name>
            <![CDATA[web app 1538976530195]]>
          </name>
          <url>
            <![CDATA[http://10.11.72.39]]>
          </url>
        </webApp>
        <scannerAppliance>
          <type>INTERNAL</type>
```

```

        <friendlyName>
            <![CDATA[John_doe]]>
        </friendlyName>
    </scannerAppliance>
    <cancelOption>SPECIFIC</cancelOption>
    <randomizeScan>>false</randomizeScan>
</target>
<profile>
    <id>458470</id>
    <name>
        <![CDATA[My Option Profile - with defaults
1538976530177]]>
    </name>
</profile>
<launchedDate>2018-10-08T05:31:10Z</launchedDate>
<launchedBy>
    <id>406790</id>
    <username>user_john</username>
    <firstName>
        <![CDATA[John]]>
    </firstName>
    <lastName>
        <![CDATA[Doe]]>
    </lastName>
</launchedBy>
    <status>SUBMITTED</status>
</WasScan>
</data>
</ServiceResponse>

```

## Sample - List scans for web applications with tags

Return a list of scans of web applications that have certain tags assigned.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscan" <
file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>

```

```

<filters>
  <Criteria field="webApp.tags.id"
operator="EQUALS">8158322</Criteria>
</filters>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>false</hasMoreRecords>
  <data>
    <WasScan>
      <id>2208317</id>
      <name>
        <![CDATA[1538976557822_Scan16]]>
      </name>
      <reference>was/1538976670564.372113</reference>
      <type>VULNERABILITY</type>
      <mode>API</mode>
      <multi>false</multi>
      <target>
        <webApp>
          <id>1472824</id>
          <name>
            <![CDATA[web app 1538976530195]]>
          </name>
          <url>
            <![CDATA[http://10.11.72.39]]>
          </url>
        </webApp>
        <scannerAppliance>
          <type>INTERNAL</type>
          <friendlyName>
            <![CDATA[John_doe]]>
          </friendlyName>
        </scannerAppliance>
        <cancelOption>SPECIFIC</cancelOption>
        <randomizeScan>false</randomizeScan>
      </target>
    </profile>
  </data>
</ServiceResponse>

```

```

        <id>458470</id>
        <name>
            <![CDATA[My Option Profile - with defaults
1538976530177]]>
        </name>
    </profile>
    <launchedDate>2018-10-08T05:31:10Z</launchedDate>
    <launchedBy>
        <id>406790</id>
        <username>user_john</username>
        <firstName>
            <![CDATA[John]]>
        </firstName>
        <lastName>
            <![CDATA[Doe]]>
        </lastName>
    </launchedBy>
    <status>SUBMITTED</status>
</WasScan>
</data>
</ServiceResponse>

```

## Sample - List canceled scan

Let us search for the scan with response showing user who canceled the scan.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST"--
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscan <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="id" operator="IN">1447989</Criteria>
  </filters>
</ServiceRequest>

```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/scan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WasScan>
      <id>1447989</id>
      <name>
        <![CDATA[My Vulnerability Scan]]>
      </name>
      <reference>was/1446408743390.1856849</reference>
      <type>VULNERABILITY</type>
      <mode>ONDEMAND</mode>
      <multi>>false</multi>
      <target>
        <webApp>
          <id>2431279</id>
          <name>
            <![CDATA[127.0.0.1]]>
          </name>
          <url>
            <![CDATA[http://127.0.0.1/]]>
          </url>
        </webApp>
        <scannerAppliance>
          <type>EXTERNAL</type>
        </scannerAppliance>
        <cancelOption>SPECIFIC</cancelOption>
      </target>
      <profile>
        <id>28147</id>
        <name>
          <![CDATA[My Option Profile]]>
        </name>
      </profile>
      <launchedDate>2017-11-01T20:12:23Z</launchedDate>
      <launchedBy>
        <id>2226741</id>
        <username>user_ak1</username>
        <firstName>
          <![CDATA[Amy]]>
        </firstName>
        <lastName>

```

```
        <![CDATA[Kim]]>
        </lastName>
    </launchedBy>
    <status>CANCELED</status>
    <cancelMode>USER</cancelMode>
    <anceledBy>
        <id>9872437571</id>
        <username>user_bb5</username>
    </anceledBy>
</WasScan>
</data>
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/wasscan.xsd)/qps/xsd/3.0/was/wasscan.xsd

## Get Scan Details

/qps/rest/3.0/get/was/wasscan/<id>

[GET]

View details for a scan on a web application which is in the user's scope. Want to find a scan ID to use as input? See [Search scans](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes authentication records in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the scan.

[Click here for available operators](#)

### Sample - List scan details

Let us view details for the scan with the ID 1447989.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/wasscan/1447989"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/wasscan.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WasScan>  
      <id>1447989</id>  
      <name>  
        <![CDATA[My Vulnerability Scan]]>
```

```

</name>
<reference>was/1446408743390.1856849</reference>
<type>VULNERABILITY</type>
<mode>ONDEMAND</mode>
<progressiveScanning>>false</progressiveScanning>
<multi>>false</multi>
<target>
  <webApp>
    <id>2431279</id>
    <name>
      <![CDATA[127.0.0.1]]>
    </name>
    <url>
      <![CDATA[http://127.0.0.1/]]>
    </url>
  </webApp>
  <scannerAppliance>
    <type>EXTERNAL</type>
  </scannerAppliance>
  <cancelOption>SPECIFIC</cancelOption>
</target>
<profile>
  <id>28147</id>
  <name>
    <![CDATA[My Option Profile]]>
  </name>
</profile>
<options>
  <count>15</count>
  <list>
    <WasScanOption>
      <name>My Authentication Record</name>
      <value>
        <![CDATA[None]]>
      </value>
    </WasScanOption>
    <WasScanOption>
      <name>Unexpected Error Threshold</name>
      <value>
        <![CDATA[48]]>
      </value>
    </WasScanOption>
    <WasScanOption>
      <name>Sensitive Content: Credit Card
Numbers</name>

```

```
<value>
  <![CDATA[false]]>
</value>
</WasScanOption>
<WasScanOption>
  <name>Performance Settings</name>
  <value>
    <![CDATA[MEDIUM]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Scanner Appliance</name>
  <value>
    <![CDATA[External]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Detection Scope</name>
  <value>
    <![CDATA[COMPLETE]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Crawling Form Submissions</name>
  <value>
    <![CDATA[NONE]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Bruteforce Settings</name>
  <value>
    <![CDATA[MINIMAL]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Option Profile Name</name>
  <value>
    <![CDATA[My Option Profile]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Maximum Crawling Links</name>
  <value>
    <![CDATA[300]]>
  </value>
```

```

</WasScanOption>
<WasScanOption>
  <name>Timeout Error Threshold</name>
  <value>
    <![CDATA[20]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Web Application Name</name>
  <value>
    <![CDATA[127.0.0.1]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Request Parameter Set</name>
  <value>
    <![CDATA[Initial Parameters]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Sensitive Content: Social Security
Numbers (US)</name>
  <value>
    <![CDATA[false]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Target URL</name>
  <value>
    <![CDATA[http://127.0.0.1/]]>
  </value>
</WasScanOption>
</list>
</options>
<launchedDate>2017-11-01T20:12:23Z</launchedDate>
<launchedBy>
  <id>2226741</id>
  <username>user_ak1</username>
  <firstName>
    <![CDATA[Amy]]>
  </firstName>
  <lastName>
    <![CDATA[Kim]]>
  </lastName>
</launchedBy>

```

```

    <status>CANCELED</status>
    <cancelMode>USER</cancelMode>
    <anceledBy>
      <id>9872437571</id>
      <username>user_bb5</username>
    </anceledBy>
    <sendMail>true</sendMail>
    <sendOneMail>true</sendOneMail>
  </WasScan>
</data>
</ServiceResponse>

```

## Sample - List scan details with DNS override settings

When a scan has DNS override settings defined, the `dnsOverride` element lists DNS override settings (one or more records) used for scanning.

### API request

```

curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/wasscan/1381602"

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>1381602</id>
      <name>
        <![CDATA[My Scan]]>
      </name>
      <reference>was/1443153045656.1850463.1</reference>
      <type>DISCOVERY</type>
      <mode>ONDEMAND</mode>
      <multi>>false</multi>
      <target>
        <webApp>
          <id>1932867</id>
          <name>
            <![CDATA[10.10.10.2]]>
          </name>
        </webApp>
      </target>
    </WasScan>
  </data>
</ServiceResponse>

```

```

        </name>
        <url>
            <![CDATA[http://10.10.10.2/]]>
        </url>
    </webApp>
    <dnsOverride>
        <id>1421</id>
        <name>
            <![CDATA[DNS Override Settings 1]]>
        </name>
    </dnsOverride>
    <scannerAppliance>
>>>

```

### Sample - Get details of a progressive scan

The progressiveScanning element will be included in the call response, if Progressive Scanning is enabled for the subscription. For all scans launched before this feature was enabled, the value "false" will be returned.

#### API request

```

curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/wasscan/31397"

```

#### XML response

```

<ServiceResponse
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>31397</id>
      <name>
        <![CDATA[Relaunch Relaunch Web Application
Vulnerability Scan - 2018-08-13]]>
      </name>
      <reference>was/1413891468597.1792880</reference>
      <type>VULNERABILITY</type>
      <mode>ONDEMAND</mode>
      <progressiveScanning>true</progressiveScanning>
    ...

```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/wasscan.xsd)/qps/xsd/3.0/was/wasscan.xsd

## Launch Scans (Single)

/qps/rest/3.0/launch/was/wasscan/

[POST]

We've enhanced the ability to support large web application scanning programs by adding the ability to scan any number of web applications as a Multi-Scan through API. This feature enables you to scan hundreds or even thousands of web applications you may have in your organization with granular insight into what scans are running and which ones are complete.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Launch WAS Scan". The output includes scan targets in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. The special field=attributes attribute for the Criteria element is used to search custom attributes (see sample below).

[Click here for available operators](#)

Parameter	Description
name	(text) The scan name.
webApps.id or tags.id <sub>1</sub>	(integer) The web applications to be scanned.  webApps.id: Specify the web application ID to include it in the scan.  tags.id: Specify the tag ID associated with the web applications to be

Qualys Web Application Scanning API  
Scans

scanned.

type	(keyword) The scan type: VULNERABILITY or DISCOVERY.
profile.id <sub>2</sub>	(integer) The name of the option profile that includes scan settings. The service provides the profile “Initial WAS Options” and we recommend this to get started.  Example: <profile> <name>Initial WAS Options</name> </profile>
target.scannerAppliance.type	(keyword) The type of scanner appliance used for the scan: EXTERNAL or INTERNAL or scannerTags.
target.scannerAppliance.friendlyName	(text) Name of the scanner appliance used for the scan.
target.scannerTags.set.Tag.id	(integer) The scanner associated with the tag (identified by the specified tag ID) is picked for the scan.
target.webAppAuthRecord.id or target.webAppAuthRecord.isDefault	Decides the authentication record to be used for the scan.  target.webAppAuthRecord.id (integer): Specify the web application’s authentication record ID to use the specific authentication record.  target.webAppAuthRecord.isDefault (boolean): Set to true to use the default web application’s

## Qualys Web Application Scanning API Scans

authentication record for the scan.

proxy.id

(integer) The proxy for scanning the target web application.

Example:

```
<proxy>
  <id>12345</id>
</proxy>
```

dnsOverride.id

(integer) The DNS override record for scanning the target web application.

Example:

```
<dnsOverride>
  <id>67890</id>
</dnsOverride>
```

sendMail

(boolean) Set to false to disable scan complete email notifications.

Example: <sendMail>>false</sendMail>

1 The element target must have at least tags or web applications specified

2 The element profile (Text) is required unless the target has a default option profile.

### Sample - Launch a new scan - basic elements

Launch a new discovery scan on the web application ID 323126 using the option profile ID 1021.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan" <
file.xml
```

Note: "file.xml" contains the request POST data.

#### Request POST data

```

<ServiceRequest>
  <data>
    <WasScan>
      <name>New WAS Discovery Scan launched from API</name>
      <type>DISCOVERY</type>
      <target>
        <webApp>
          <id>323126</id>
        </webApp>
        <webAppAuthRecord>
          <isDefault>true</isDefault>
        </webAppAuthRecord>
        <scannerAppliance>
          <type>EXTERNAL</type>
        </scannerAppliance>
      </target>
      <profile>
        <id>1021</id>
      </profile>
    </WasScan>
  </data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>16954</id>
    </WasScan>
  </data>
</ServiceResponse>

```

## Sample - Launch a new scan - use proxy

Launch a new vulnerability scan using proxy ID 12345.

## API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <WasScan>
      <name>New WAS Vulnerability Scan launched from API</name>
      <type>VULNERABILITY</type>
      <target>
        <webApp>
          <id>323126</id>
        </webApp>
        <scannerAppliance>
          <type>INTERNAL</type>
          <friendlyName>dp_scanner</friendlyName>
        </scannerAppliance>
        <proxy>
          <id>12345</id>
        </proxy>
      </target>
      <profile>
        <id>1021</id>
      </profile>
    </WasScan>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>16954</id>
    </WasScan>
```

```
</data>
</ServiceResponse>
```

## Sample - Launch a new scan - assign multiple scanner appliances

Let us launch a new discovery scan on the web application ID 522066 and assign the pool of scanners using asset tag.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WasScan>
      <name><![CDATA[Scan With Pool of Internal Scanners]]></name>
      <type>DISCOVERY</type>
      <target>
        <webApp>
          <id>522066</id>
        </webApp>
        <scannerTags>
          <set>
            <Tag>
              <id>15415353311147</id>
            </Tag>
          </set>
        </scannerTags>
      </target>
    </WasScan>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/scan.xsd">
```

```

<responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>1731352</id>
      <name><![CDATA[Scan With Pool of Internal
Scanners]]></name>
      <reference>was/1484222839357.1955345</reference>
      <type>DISCOVERY</type>
      <mode>ONDEMAND</mode>
      <progressiveScanning>true</progressiveScanning>
      <multi>true</multi>
      <target>
        <webApps>
          <list>
            <WebApp>
              <id>522066</id>
              <name><![CDATA[My Web Application]]></name>
              <url><![CDATA[http://mywebapp.com]]></url>
            </WebApp>
          </list>
        </webApps>
        <scannerTags>
          <set>
            <Tag>
              <id>8461819</id>
              <name><![CDATA[TagForScanner]]></name>
            </Tag>
          </set>
        </scannerTags>
        <cancelOption>DEFAULT</cancelOption>
      </target>
      <profile>
        <id>194283</id>
        <name>
          <![CDATA[Initial WAS Options]]>
        </name>
      </profile>
      <options>
        <count>14</count>
        <list>
          <WasScanOption>
            <name>Web Application Authentication Record
Name</name>
            <value><![CDATA[None]]></value>

```

```

</WasScanOption>
<WasScanOption>
  <name>Unexpected Error Threshold</name>
  <value>
    <![CDATA[300]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Sensitive Content: Credit Card
Numbers</name>
  <value>
    <![CDATA[false]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Performance Settings</name>
  <value>
    <![CDATA[LOW]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Detection Scope</name>
  <value>
    <![CDATA[COMPLETE]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Crawling Form Submissions</name>
  <value>
    <![CDATA[BOTH]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Bruteforce Settings</name>
  <value>
    <![CDATA[DISABLED]]>
  </value>
</WasScanOption>
<WasScanOption>
  <name>Option Profile Name</name>
  <value>
    <![CDATA[Initial WAS Options]]>
  </value>
</WasScanOption>
<WasScanOption>

```

```

        <name>Maximum Crawling Links</name>
        <value>
            <![CDATA[300]]>
        </value>
    </WasScanOption>
    <WasScanOption>
        <name>Timeout Error Threshold</name>
        <value>
            <![CDATA[100]]>
        </value>
    </WasScanOption>
    <WasScanOption>
        <name>Web Application Name</name>
        <value>
            <![CDATA[My Web Application]]>
        </value>
    </WasScanOption>
    <WasScanOption>
        <name>Request Parameter Set</name>
        <value>
            <![CDATA[Initial Parameters]]>
        </value>
    </WasScanOption>
    <WasScanOption>
        <name>Sensitive Content: Social Security
Numbers (US)</name>
        <value>
            <![CDATA[false]]>
        </value>
    </WasScanOption>
    <WasScanOption>
        <name>Target URL</name>
        <value>
            <![CDATA[http://mywebapp.com]]>
        </value>
    </WasScanOption>
    </list>
</options>
<launchedDate>2017-01-12T12:07:19Z</launchedDate>
<launchedBy>
    <id>1056860</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
</launchedBy>

```

```

        <status>SUBMITTED</status>
        <sendMail>>true</sendMail>
    </WasScan>
</data>
</ServiceResponse>

```

## Sample - Launch a new scan - progressive scanning

The user can set the progressiveScanning option to true or false for the vulnerability scan, if Progressive Scanning is enabled for the subscription. If the option is not set for a scan, the Progressive Scanning setting for the web application is used. Note this option is not supported for a discovery scan.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan" <
file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <data>
    <WasScan>
      <name>New WAS Vulnerability Scan launched from API</name>
      <type>VULNERABILITY</type>
      <target>
        <webApp>
          <id>323126</id>
        </webApp>
        <scannerAppliance>
          <type>EXTERNAL</type>
        </scannerAppliance>
      </target>
      <profile>
        <id>1021</id>
      </profile>
      <cancelAfterNHours>5</cancelAfterNHours>
      <progressiveScanning>>false</progressiveScanning>
    </WasScan>
  </data>
</ServiceRequest>

```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>16954</id>
    </WasScan>
  </data>
</ServiceResponse>
```

If Progressive Scanning is not enabled for the subscription, the progressiveScanning element cannot be provided, otherwise an error will be returned.

**XML response (error)**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>INVALID_REQUEST</responseCode>
  <responseErrorDetails>
    <errorMessage>Progressive scanning is not enabled in your
subscription.</errorMessage>
    <errorResolution>Please check with your account manager to
enable this option.</errorResolution>
  </responseErrorDetails>
</ServiceResponse>
```

**XSD**

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd)/qps/xsd/3.0/was/wasscan.xsd

## Launch Scan (Multiple)

/qps/rest/3.0/launch/was/wasscan

[POST]

We've enhanced the ability to support large web application scanning programs by adding the ability to scan any number of web applications as a Multi-Scan through API. This feature enables you to scan hundreds or even thousands of web applications you may have in your organization with granular insight into what scans are running and which ones are complete.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Launch WAS Scan". The output includes scan targets in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements

The special field=attributes attribute for the Criteria element is used to search custom attributes (see sample below).

[Click here for available operators](#)

Parameter	Description
name	(text) The scan name.
target.webApp.id <sub>i</sub>	(integer) The ID of the web application being scanned.
target.tags.excluded.option	(keyword: ALL or ANY) Decides which web applications should be excluded from the scan.  ALL : Only the web applications associated

	<p>with all the specified tags are excluded from the scan.</p> <p>ANY : Only the web applications associated with any of the specified tags are excluded from the scan.</p>
target.tags.excluded.tagList.Tag.id	(integer) The web applications associated with the tag (identified by the specified tag ID) are excluded from the scan.
target.tags.included.option	<p>(keyword: ALL or ANY) Decides which web applications should be included in the scan.</p> <p>ALL : Only the web applications associated with all the specified tags are included in the scan.</p> <p>ANY : Only the web applications associated with any of the specified tags included in the scan.</p>
target.tags.included.tagList.Tag.id	(integer) The web applications associated with the tag (identified by the specified tag ID) are included in the scan.
options	<p>(keyword: ANY, ALL) Decides which web applications should be included or excluded from the scan.</p> <p>ALL : Only the web applications associated with all the specified tags are excluded from the scan.</p> <p>ANY : Only the web applications associated with any of the specified tags are excluded from the scan.</p>
type	(keyword: EXTERNAL or INTERNAL or scannerTags) Type of the scanner appliance to be used for the scan.

profile.id<sub>2</sub> (integer) (integer) The name of the option profile that includes scan settings. The service provides the profile “Initial WAS Options” and we recommend this to get started.

Example:

```
<profile>  
  <name>Initial WAS Options</name>  
</profile>
```

target.authRecordOption (integer) Defines the authentication record to be used during the scan.

Set to SPECIFIC -Always use the authRecord passed while launching the scan.

Set to DEFAULT- Forces the use of the authRecord, if set, else fall back to the one passed in to the API while launching the scan.

target.profileOption (keyword: ALL or ANY) Defines the option profile to be used during the scan.

Set to SPECIFIC - Always use the optionProfile passed while launching the scan.

Set to DEFAULT - Forces the use of the optionProfile if set, else fall back to the one passed in to the API while launching the scan.

target.scannerOption (integer) Defines the scanner appliance to be used during the scan.

Set to SPECIFIC - Always use the scanner passed while launching the scan

Set to DEFAULT - Forces the use of the scanner if set, else fall back to the one

passed in to the API while launching the scan.

<cancelOption>

Set to DEFAULT - Forces the use of the target web application's cancelScans option if set, else fall back to the one passed in to the API while launching the scan.

Set to SPECIFIC - Always use the cancel scan option passed while launching the scan.

sendMail

(boolean) Set to false to disable scan complete email notifications.

Example:<sendMail>>false</sendMail>

sendOneMail

(boolean) Set to true to send one email upon multi-scan completion. Set to false to send one email upon completion of each individual scan.

Example:<sendOneMail>>true</sendOneMail>

Note: sendOneMail is valid only when sendMail = true for a multi-scan (multiple web applications being scanned). If sendMail is set to false, sendOneMail will be ignored.

1 The element target must have at least tags or web applications specified

2 The element profile (Text) is required unless the target has a default option profile.

### Sample - Launch a new scan - basic elements

Launch a new discovery scan on the web application ID 4330527 and 4330538 using the option profile ID 1070535.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WasScan>
      <name>1497343127459_Scan7</name>
      <type>DISCOVERY</type>
      <target>
        <scannerAppliance>
          <type>EXTERNAL</type>
        </scannerAppliance>
        <webApps>
          <set>
            <WebApp>
              <id>4330527</id>
            </WebApp>
            <WebApp>
              <id>4330338</id>
            </WebApp>
          </set>
        </webApps>
        <profileOption>DEFAULT</profileOption>
      </target>
      <profile>
        <id>1070535</id>
      </profile>
    </WasScan>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
```

```

    <WasScan>
      <id>2281862</id>
    </WasScan>
  </data>
</ServiceResponse>

```

## Sample - Launch a multi-scan using tags

Let's launch a multi- scan for all the web applications associated with the tags specified in the request filter.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan" <
file.xml
Note: "file.xml" contains the request POST data.

```

### Request POST data

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <WasScan>
      <name>1497343127649_Scan9</name>
      <type>DISCOVERY</type>
      <target>
        <scannerAppliance>
          <type>EXTERNAL</type>
        </scannerAppliance>
        <tags>
          <included>
            <option>ALL</option>
            <tagList>
              <set>
                <Tag><id>12017424</id></Tag>
                <Tag><id>12017228</id></Tag>
              </set>
            </tagList>
          </included>
          <excluded>
            <option>ANY</option>
            <tagList>
              <set>

```

```

        <Tag>
          <id>12017228</id>
        </Tag>
      </set>
    </tagList>
  </excluded>
</tags>
<scannerOption>DEFAULT</scannerOption>
</target>
<profile>
  <id>1070535</id>
</profile>
</WasScan>
</data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>2281863</id>
    </WasScan>
  </data>
</ServiceResponse>

```

### Sample - Launch a new scan with cancel option to DEFAULT

Launch a new vulnerability scan on web app ID 2376280 and 4114251 and set the cancel scan option to DEFAULT. This forces the use of the target web app's cancelScans option if set.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan" <
file.xml

```

Note: "file.xml" contains the request POST data.

**Request POST data**

```

<ServiceRequest>
<data>
<WasScan>
  <name><![CDATA[sample Scan]]></name>
  <type>VULNERABILITY</type>
  <target>
    <webApps>
      <set>
        <WebApp>
          <id>2376280</id>
        </WebApp>
        <WebApp>
          <id>4114251</id>
        </WebApp>
      </set>
    </webApps>
    <scannerAppliance>
      <type>EXTERNAL</type>
    </scannerAppliance>
    <cancelOption>DEFAULT</cancelOption>
  </target>
  <profile>
    <id>2231014</id>
  </profile>
</WasScan>
</data>
</ServiceRequest>

```

**XML response**

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchemainstance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>1275177</id>
    </WasScan>
  </data>
</ServiceResponse>

```

## Sample - Launch a new multi-scan

Let us launch a scan that allows to send one email on completion of multi-scan (not for each individual scan in the group).

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/launch/was/wasscan" <file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WasScan>
      <name><![CDATA[New Scan]]></name>
      <type>VULNERABILITY</type>
      <target>
        <webApps>
          <set>
            <WebApp><id>8389207</id></WebApp>
            <WebApp><id>8389244</id></WebApp>
          </set>
        </webApps>
        <scannerAppliance>
          <type>EXTERNAL</type>
        </scannerAppliance>
      </target>
      <profile>
        <id>2337683</id>
      </profile>
      <sendOneMail>true</sendOneMail>
    </WasScan>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchemainstance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
```

```
<responseCode>SUCCESS</responseCode>  
<count>1</count>  
<data>  
  <WasScan>  
    <id>3456140</id>  
  </WasScan>  
</data>  
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server/qps/xsd/3.0/was/wasscan.xsd)/qps/xsd/3.0/was/wasscan.xsd

## Scan Again

/qps/rest/3.0/scanagain/was/scan/<id>

[POST]

We now provide the option to execute a previous scan again. Identify the scan you want to run again and use scanagain action. We'll do our best to pre-fill the scan settings to match the original scan.

Permissions required - User must have WAS module enabled. User account must have these permissions: "API Access" and "Access WAS module". The web application must be in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the scan to be executed again. You could optionally provide a new name for the scan as well.

[Click here for available operators](#)

### Sample - Scan with Scanagain option

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/scanagain/was/wasscan/4626354"
```

#### Request POST data

```
<ServiceRequest>
  <data>
    <WasScan>
      <name>Sample Scan Name for Rescan</name>
    </WasScan>
  </data>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1 </count>
  <data>
    <WasScan>
      <id>4626354</id>
    </WasScan>
  </data>
</ServiceResponse>
```

## Retrieve Scan Status

/qps/rest/3.0/status/was/wasscan/<id>

[GET]

Retrieve the status of a scan on a web application which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes scan targets in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the scan.

[Click here for available operators](#)

### Sample - View scan status along with authentication status

View details for the scan with the ID 1902350.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/status/was/wasscan/1902350"  
"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/wasscan.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WasScan>  
      <id>1902350</id>
```

```
<status>FINISHED</status>
<summary>
  <resultsStatus>NO_HOST_ALIVE</resultsStatus>
  <authStatus>NONE</authStatus>
</summary>
</WasScan>
</data>
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/scan.xsd)/qps/xsd/3.0/was/scan.xsd

## Retrieve Scan Results

`/qps/rest/3.0/download/was/wasscan/<id>`

`/qps/rest/2.0/download/was/wasscan/<id>`

[GET]

Retrieve the results of a scan on a web application which is in the user's scope. Include "3.0" in the URL for WASA v3 scan results using the WAS API schema, part of the API V3 architecture (see <https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd>). Include "2.0" in the URL for scan results in legacy format (WAS v2 and earlier), using the `webapp_scan.dtd` - see [Reference: WAS Scan Results](#) (legacy).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes scan targets in the user's scope.

Tip: When you download web application scan results using the WAS API, you'll want to view vulnerability descriptions from the Qualys KnowledgeBase in order to understand the vulnerabilities detected and see our recommended solutions. See [How to Download Vulnerability Details](#).

### Input Parameters

The element "id" (integer) is required, where "id" identifies the scan.

[Click here for available operators](#)

### Sample - Download results of a scan

Download the results of the scan with the ID 174726.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/download/was/wasscan/174726"
```

**XML response**

```

<?xml version="1.0" encoding="UTF-8"?>
<WasScan xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscan.xsd">
  <id>174726</id>
  <name><![CDATA[My Web Application Scan]]></name>
  <reference>was/1328563860860.218807</reference>
  <type>VULNERABILITY</type>
  <mode>API</mode>
  <target>
    <webApp>
      <id>952835</id>
      <name><![CDATA[My Web Application]]></name>
      <url><![CDATA[https://example.com/]]></url>
    </webApp>
    <scannerAppliance>
      <type>INTERNAL</type>
      <friendlyName><![CDATA[is_quays_tc321]]></friendlyName>
    </scannerAppliance>
  </target>
  <profile>
    <id>6714</id>
    <name><![CDATA[Initial WAS Options]]></name>
  </profile>
  <options>
    <count>10</count>
    <list>
      <WasScanOption>
        <name>Detection Scope</name>
        <value>COMPLETE</value>
      </WasScanOption>
      <WasScanOption>
        <name>Maximum Crawling Links</name>
        <value>300</value>
      </WasScanOption>
      <WasScanOption>
        <name>Bruteforce Settings</name>
        <value>MINIMAL</value>
      </WasScanOption>
      <WasScanOption>
        <name>Option Profile Name</name>
        <value>Initial WAS Options</value>
      </WasScanOption>
    </list>
  </options>
</WasScanOption>

```

```

    <name>Scanner Appliance Name</name>
<value><![CDATA[External (IP: 10.40.3.104, Scanner: 6.2.13-1, WAS:
2.13.5-1, Signatures: 2.2.52-2)]]></value>
    </WasScanOption>
<WasScanOption>
    <name>Ignore Binary Files</name>
    <VALUE><![CDATA[true]]></VALUE>
</WasScanOption>
...
</list>
</options>
<launchedDate>2017-02-06T21:31:00Z</launchedDate>
<launchedBy>
    <id>35842</id>
    <username>username</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
</launchedBy>
<status>FINISHED</status>
<endScanDate>2017-02-06T21:49:34Z</endScanDate>
<scanDuration>1114</scanDuration>
<summary>
    <crawlDuration>16</crawlDuration>
    <testDuration>138</testDuration>
    <linksCollected>10</linksCollected>
    <linksCrawled>1</linksCrawled>
    <nbRequests>503</nbRequests>
    <averageResponseTime>0.001554</averageResponseTime>
    <resultsStatus>SUCCESSFUL</resultsStatus>
    <authStatus>NONE</authStatus>
</summary>
<stats>
    <global>
        <nbVulnsTotal>79</nbVulnsTotal>
        <nbVulnsLevel5>24</nbVulnsLevel5>
        <nbVulnsLevel4>0</nbVulnsLevel4>
        <nbVulnsLevel3>3</nbVulnsLevel3>
        <nbVulnsLevel2>18</nbVulnsLevel2>
        <nbVulnsLevel1>34</nbVulnsLevel1>
        <nbScsTotal>0</nbScsTotal>
        <nbScsLevel5>0</nbScsLevel5>
        <nbScsLevel4>0</nbScsLevel4>
        <nbScsLevel3>0</nbScsLevel3>
        <nbScsLevel2>0</nbScsLevel2>
        <nbScsLevel1>0</nbScsLevel1>

```

```

<nbIgsTotal>10</nbIgsTotal>
<nbIgsLevel5>0</nbIgsLevel5>
<nbIgsLevel4>0</nbIgsLevel4>
<nbIgsLevel3>0</nbIgsLevel3>
<nbIgsLevel2>0</nbIgsLevel2>
<nbIgsLevel1>10</nbIgsLevel1>
</global>
<byGroup>
  <count>3</count>
  <list>
    <GroupStat>
      <group>PATH</group>
      <nbTotal>18</nbTotal>
      <nbLevel5>0</nbLevel5>
      <nbLevel4>0</nbLevel4>
      <nbLevel3>0</nbLevel3>
      <nbLevel2>18</nbLevel2>
      <nbLevel1>0</nbLevel1>
    </GroupStat>
    ...
  </list>
</byGroup>
<byOwasp>
  <count>4</count>
  <list>
    <OwaspStat>
      <owasp>OWASP-A4</owasp>
      <nbTotal>18</nbTotal>
      <nbLevel5>0</nbLevel5>
      <nbLevel4>0</nbLevel4>
      <nbLevel3>0</nbLevel3>
      <nbLevel2>18</nbLevel2>
      <nbLevel1>0</nbLevel1>
    </OwaspStat>
    ...
  </list>
</byOwasp>
<byWasc>
  <count>5</count>
  <list>
    <WascStat>
      <wasc>WASC-15</wasc>
      <nbTotal>14</nbTotal>
      <nbLevel5>0</nbLevel5>
      <nbLevel4>0</nbLevel4>

```



```

    </instances>
  </WasScanVuln>
...
</list>
</vulns>
<sensitiveContents>
  <count>0</count>
</sensitiveContents>
<igs>
  <count>10</count>
  <list>
    <WasScanIg>
      <qid>150058</qid>
      <title><![CDATA[Flash Analysis]]></title>
      <data base64="true"><![CDATA
[U1dGIGZpbGU6IGh0dHA6Ly8xMC4xMC4yNi4yMzg6ODAvYm9xL2FjY3QvcGVyc29uYWwvd
2ludGVyMi5zd2YKICAgICBWZXJzaW9uOiA4CgpTV0YgZmlsZTogaHR0cDovLzEwLjEwLjI
2LjIzOC9ib3EvcHJvdGVjdGVkL21pbWUvZGVmYXVsdFBhZ2Uuc3dmCiAgICAgVmVyc2lvb
jogNgoK]]></data>
    </WasScanIg>
...
  </list>
</igs>
</WasScan>

```

## Sample - Download results of a scan with SSL/TLS details

### API request

```

curl -n -u "USERNAME:PASSWORD"
  "https://qualysapi.qualys.com/qps/rest/3.0/download/was/wasscan/1302"

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<WasScan xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/wasscan.xsd">
  <id>3217161</id>
  <name>
    <![CDATA[[[SSL-Certs]] 2020-01-30 6:20:49PM]]>
  </name>
  <reference>was/1580388655076.626241</reference>
  <type>VULNERABILITY</type>
  <mode>ONDEMAND</mode>

```

```

<progressiveScanning>DISABLED</progressiveScanning>
<multi>>false</multi>
<target>
  <webApp>
    <id>3016632</id>
    <name>
      <![CDATA[SSL-Certs]]>
    </name>
    <url>
      <![CDATA[https://10.115.78.72/welcome.html]]>
    </url>
  </webApp>
  <scannerAppliance>
    <type>INTERNAL</type>
    <friendlyName>
      <![CDATA[WAS_Scanner_vp1]]>
    </friendlyName>
  </scannerAppliance>
  <cancelOption>SPECIFIC</cancelOption>
</target>
<profile>
  <id>893488</id>
  <name>
    <![CDATA[ssl]]>
  </name>
</profile>
<options>
  <count>16</count>
  <list>
    <WasScanOption>
      <name>Web Application Authentication Record
Name</name>
      <value>
        <![CDATA[None]]>
      </value>
    </WasScanOption>
    ...
  </list>
  <WasScanIg>
    <qid>38704</qid>
    <title>
      <![CDATA[SSL/TLS Key Exchange Methods]]>
    </title>
    <sslData>
    ...

```

```

<sslDataInfoList>
  <list>
    <SSLDataInfo>
      <sslDataKexList>
        <list>
          <SSLDataKex>
            <protocol>TLSv1</protocol>
            <kex>ECDHE</kex>
            <group>x25519</group>
            <keysize>256</keysize>
            <fwdsec>yes</fwdsec>
            <classical>128</classical>
            <quantum>low</quantum>
          </SSLDataKex>
        ...
      </sslDataKexList>
    </SSLDataInfo>
  </list>
</sslDataInfoList>
<WasScanIg>
  <qid>38706</qid>
  <title>
    <![CDATA[SSL/TLS Protocol Properties]]>
  </title>
  <sslData>
    ...
  </sslData>
</WasScanIg>
<sslDataInfoList>
  <list>
    <SSLDataInfo>
      <sslDataPropList>
        <list>
          <SSLDataProp>
            <name>Extended Master
Secret</name>
            <value>yes</value>
            <protocol>TLSv1</protocol>
          </SSLDataProp>
          <SSLDataProp>
            <name>Encrypt Then
MAC</name>
            <value>yes</value>
            <protocol>TLSv1</protocol>
          </SSLDataProp>
        ...
      </sslDataPropList>
    </SSLDataInfo>
  </list>
</sslDataInfoList>
<WasScanIg>
  <qid>6</qid>
  <title>
    <![CDATA[DNS Host Name]]>
  </title>

```

```

        <sslData>
...
<sslDataInfoList>
    <list>
        <SSLDataInfo>
            <certificateFingerprint>291126AC8ED272
F71EDF06E5B76BBECD1C811769D4FE988DE95FF848AFEB6A</certificateFingerp
rint>
            </SSLDataInfo>
        </list>
    </sslDataInfoList>
...
<WasScanIg>
    <qid>38291</qid>
    <title>
        <![CDATA[SSL Session Caching Information]]>
    </title>
...
<WasScanIg>
    <qid>45017</qid>
    <title>
        <![CDATA[Operating System Detected]]>
    </title>
    <sslData>
        <protocol>tcp</protocol>
        <ip>10.115.78.72</ip>
        <port>0</port>
        <result>
            <![CDATA[Ubuntu_/_Fedora_/_Tiny_Core_Linux_/_L
inux_3.x TCP/IP_Fingerprint U5933:443
]]>
        </result>
    </sslData>
...
<WasScanIg>
    <qid>38116</qid>
    <title>
        <![CDATA[SSL Server Information Retrieval]]>
    </title>
    <sslData>
...
<sslDataInfoList>
    <list>
        <SSLDataInfo>
            <sslDataCipherList>

```

```

<list>
  <SSLDataCipher>
    <protocol>TLSv1</protocol>
    <name>ECDHE-RSA-AES128-
SHA</name>
    <keyExchange>ECDH</keyExch
ange>
    <auth>RSA</auth>
    <mac>SHA1</mac>
    <encryption>AES(128)</encr
yption>
    <grade>MEDIUM</grade>
  </SSLDataCipher>
  ...
</igs>
  <sendMail>true</sendMail>
  <enableWAFAuth>false</enableWAFAuth>
</WasScan>

```

## XSD

[platform API server](https://platform-api-server/qls/xsd/3.0/was/wasscan.xsd)/qls/xsd/3.0/was/wasscan.xsd

## Cancel Scan

/qps/rest/3.0/cancel/was/wasscan/<id>

[POST]

Cancel an unfinished scan on a web application which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Cancel WAS Scan".

### Input Parameters

The element "id" (integer) is required, where "id" identifies the scan.

[Click here for available operators](#)

### Sample - Cancel unfinished scan

Cancel the unfinished scan that has the ID 168.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/cancel/was/wasscan/168"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/wasscan.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WasScan>  
      <id>168</id>  
    </WasScan>  
  </data>
```

```
</ServiceResponse>
```

## Sample - Cancel unfinished scan with scan results

Use parameter `<cancelWithResults>` to cancel the scan and still retain results. You can use the scan ID and generate a report to view the results.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/cancel/was/wasscan/6620298"
```

### Request POST data

```
<ServiceRequest>
  <data>
    <WasScan>
      <cancelWithResults>true</cancelWithResults>
    </WasScan>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <data>
    <WasScan>
      <id>6620298</id>
    </WasScan>
  </data>
</ServiceResponse>
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd)/qps/xsd/3.0/was/wasscan.xsd

## Delete Scan

/qps/rest/3.0/delete/was/wasscan/<id>

/qps/rest/3.0/delete/was/wasscan/<filters>

[POST]

Delete an existing scan on a web application which is in the user's scope. You can delete any scan in your account that is not running.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Delete WAS scan" permission. The scan to be deleted must be within the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. Click here for descriptions of <WebApp> elements

[Click here for available operators](#)

Parameter	Description
id	(integer)The scan ID.
name	(text) The scan name.
webApp.name	(text) The name of the web application being scanned.
webApp.id	(integer) The ID of the web application being scanned.
reference	(text) Scan Reference ID.
launchedDate	(date) The date and time when the scan was launched in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).

type	(keyword) The scan type: VULNERABILITY or DISCOVERY.
mode	(keyword) The mode of the scan: ONDEMAND, SCHEDULED or API.
status	(keyword) The status of the scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR or CANCELED.
authStatus	(Keyword) Indicates the status of the authentication record: NONE, NOT_USED, SUCCESSFUL, FAILED or PARTIAL.
resultsStatus	(keyword) The status of the scan: NOT_USED, NO_HOST_ALIVE, NO_WEB_SERVICE, PROCESSING, SCAN_RESULTS_INVALID, TIME_LIMIT_REACHED, SERVICE_ERROR, SCAN_INTERNAL_ERROR, SUCCESSFUL, TO_BE_PROCESSED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, SUBMITTED, RUNNING, FINISHED, CANCELED, CANCELING ERROR, DELETED.

## Sample - Delete a specified scan

Let us delete the scan with the ID 12405.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" "https://qualysapi.qualys.com/qps/rest/3.0/delete/was/wasscan/12405"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScan>
      <id>12405</id>
    </WasScan>
  </data>
```

```
</ServiceResponse>
```

## Sample - Delete scans with criteria

Let us delete scans with a name that contains the string "VULN".

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/wasscan" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="name" operator="CONTAINS">VULN</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/wasscan.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>2</count>  
  <data>  
    <WasScan>  
      <id>12874</id>  
    </WasScan>  
    <WasScan>  
      <id>13093</id>  
    </WasScan>  
  </data>  
</ServiceResponse>
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscan.xsd)/qps/xsd/3.0/was/wasscan.xsd

## WasScan Reference

The <WasScan> element includes sub elements used to define a web application scan. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) The scan ID. This element is assigned by the service and is required for a certain type of request (details, status, results or cancel).
name	(text) The user-defined scan name (maximum 256 characters).
target* (for single web application)	<p>(text) The target of the scan. The target includes the web application and authentication records, if any.</p> <p>&lt;scannerAppliance&gt; - type (keyword) is set to INTERNAL for a scanner appliance, or EXTERNAL for external scanners or scannerTags for assigning multiple scanner appliances grouped by asset tag. If the type is INTERNAL, friendlyName (text) is the user-defined appliance name.</p> <p>&lt;/webAppAuthRecord&gt; - Specify &lt;id&gt; set to an auth record ID, or &lt;isDefault&gt; set to true (to use the default auth record for the target web app).</p> <p>Example: target.webApp is required</p> <pre>&lt;target&gt;   &lt;webApp&gt;     &lt;id&gt;323126&lt;/id&gt;   &lt;/webApp&gt;   &lt;webAppAuthRecord&gt;     &lt;id&gt;1054&lt;/id&gt;   &lt;/webAppAuthRecord&gt;   &lt;scannerAppliance&gt;     &lt;type&gt;Internal&lt;/type&gt;     &lt;friendlyName&gt;dp_scanner&lt;/friendlyName&gt;   &lt;/scannerAppliance&gt;   &lt;cancelOption&gt;DEFAULT&lt;/cancelOption&gt;</pre>

```
</target>
```

target\* (for multiple web application)

<cancelOption> set to DEFAULT - Forces the use of the target web app's cancelScans option if set, else fall back to the one passed in to the API while launching the scan.

<cancelOption> set to SPECIFIC - Always use the cancel scan option passed while launching the scan.

<target.authRecordOption> set to SPECIFIC -Always use the authRecord passed while launching the scan.

<target.authRecordOption> set to DEFAULT-Forces the use of the authRecord, if set, else fall back to the one passed in to the API while launching the scan.

<target.profileOption> set to SPECIFIC-Always use the optionProfile passed while launching the scan.

<target.profileOption> set to DEFAULT-Forces the use of the optionProfile if set, else fall back to the one passed in to the API while launching the scan.

<target.scannerOption> set to SPECIFIC-Always use the scanner passed while launching the scan.

<target.scannerOption> set to DEFAULTForces the use of the scanner if set, else fall back to the one passed in to the API while launching the scan.

<target.randomizeScan> (Boolean) - Set to true to scan the selected web applications in random order. Set to false to scan the selected web application in sequential order.

target.tags (For MultiScan)--

---target.tags.included.option(ALL/ANY) is required,

---target.tags.included.tagList is required, only <set> is allowed for target.tags.included.tagList.

--- target.tags.included.tagList.set.Tag.id is required and should be

valid

---Only target.tags.exclusive is not allowed, it must be with target.tags.inclusive

---If target.tags.excluded is present, all the above rules are applicable to it

Example: Either target.webApps or target.tags is required and these are mutually exclusive.

target.webApps (For MultiScan)-

Only <set> is allowed for target.webApps

```
<webApps>
  <set>
    <WebApp>
      <id>4330527</id>
    </WebApp>
    <WebApp>
      <id>4330327</id>
    </WebApp>
  </set>
</webApps>
```

target.tags (For MultiScan)-

```
<tags>
  <included>
    <option>ALL</option>
    <tagList>
      <set>
        <Tag><id>12017424</id></Tag>
        <Tag><id>12017228</id></Tag>
      </set>
    </tagList>
  </included>
  <excluded>
    <option>ANY</option>
    <tagList>
      <set>
        <Tag><id>12017228</id></Tag>
      </set>
    </tagList>
  </excluded>
</tags>
```

*Qualys Web Application Scanning API*  
*Scans*

type	(keyword) The scan type: VULNERABILITY or DISCOVERY.
sendMail	(boolean) Set to false to disable scan complete email notifications.  Example: <sendMail>false</sendMail>
sendOneMail	(boolean) Set to false to disable scan complete email notifications.  Example: <sendMail>false</sendMail>
profile.id	(integer) The name of the option profile that includes scan settings. The service provides the profile “Initial WAS Options” and we recommend this to get started.  Example: <profile> <name>Initial WAS Options</name> </profile>
proxy.id	(integer) The name of the option profile that includes scan settings. The service provides the profile “Initial WAS Options” and we recommend this to get started.  Example: <profile> <name>Initial WAS Options</name> </profile>
dnsOverride.id	(integer) The DNS override record for scanning the target web application.  Example: <dnsOverride> <id>67890</id> </dnsOverride>
Scanner Appliance	(integer) The IP address of the external scanner appliance, when an external scanner is used.
mode	(keyword) The mode of the scan: ONDEMAND, SCHEDULED or API.

launchedDate	(date) The date and time when the scan was launched in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).
launchedBy*	<p>The user who launched the scan. User properties include user ID, user login, first and last name.</p> <p>Example:</p> <pre>&lt;launchedBy&gt;   &lt;id&gt;123056&lt;/id&gt;   &lt;username&gt;username&lt;/username&gt;   &lt;firstName&gt;&lt;![CDATA[John]]&gt;&lt;/firstName&gt;   &lt;lastName&gt;&lt;![CDATA[Smith]]&gt;&lt;/lastName&gt; &lt;/launchedBy&gt;</pre>
status	(keyword) The status of the scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR or CANCELED.
endScanDate	(date) The date and time when the scan ended in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).
summary	<p>The scan summary. &lt;crawlTime&gt; is the length of time used to crawl the web application. &lt;testDuration&gt; is the length of time used to perform analysis. &lt;nbRequests&gt; is the number of requests sent during the scan. &lt;authStatus&gt; is the authentication status (NONE, NOT_USED, SUCCESSFUL, FAILED or PARTIAL)</p> <p>Example:</p> <pre>&lt;summary&gt;   &lt;crawlTime&gt;22.0&lt;/crawlTime&gt;   &lt;testDuration&gt;112.0&lt;/testTime&gt;   &lt;linksCrawled&gt;17&lt;/linksCrawled&gt;   &lt;nbRequests&gt;3814&lt;/nbRequests&gt;   &lt;os&gt;Windows XP SP2&lt;/os&gt;   &lt;resultsStatus&gt;RESULTS_PROCESSED_SUCCESSFULLY&lt;/resultsStatus&gt;   &lt;authStatus&gt;NO_AUTH&lt;/authStatus&gt; &lt;/summary&gt;</pre>
vulns	The list of detected vulnerabilities. Each <WasScanVuln> element identifies a particular vulnerability QID and the URI where detected, each <WasScanVulnInstance> element identifies a

vulnerability instance, and each <WasScanVulnInstancePayload> element identifies associated payloads.

igs	The detected information gathered. Each <WasScanIlg> element identifies a particular information gathered QID.
sensitiveContents	The detected sensitive content. Each <WasScanSensitiveContent> element identifies a particular sensitive content QID and the URI where detected, each <instances> element identifies a sensitive content instance, and each <WasScanSensitiveContentInstancePayload> element identifies associated payloads.
stats	The statistics gathered by the scan: the total number of vulnerabilities, the number of vulnerabilities by severity level, information gathered by severity level and the number of vulnerabilities by group, OWASP and WASC.

cancelWithResults (boolean) A flag to indicate if the scan to be canceled should retain partial scan results or not. The parameter is supported for single scan, only child scan (but not parent scan).

We recommend you to use this parameter only after 20 minutes of scan goes into Running status.

Example:

```
<WasScan>
  <cancelWithResults>true</cancelWithResults>
</WasScan>
```

## WAS Scan Results Reference

You have the option to retrieve web application scan results in legacy format (WAS v2 and earlier), using the webapp\_scan.dtd (see [Retrieve the results of a scan](#)). You can download this DTD by going to [https://qualysapi.qualys.com/webapp\\_scan.dtd](https://qualysapi.qualys.com/webapp_scan.dtd) (where qualysapi is the API server URL where your account is located ).

### WAS scan results DTD

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- QUALYS WEB APPLICATION SCAN DTD -->
<!ELEMENT WEB_APPLICATION_SCAN (ERROR | (HEADER, SUMMARY,
                                         RESULTS))>

<!ELEMENT ERROR (#PCDATA)>
<!ATTLIST ERROR number CDATA #IMPLIED>
<!-- GENERIC HEADER -->
<!ELEMENT HEADER (NAME, GENERATION_DATETIME, COMPANY_INFO,
                  USER_INFO)>
<!ELEMENT NAME (#PCDATA)>
<!ELEMENT GENERATION_DATETIME (#PCDATA)>
<!ELEMENT COMPANY_INFO (NAME, ADDRESS, CITY, STATE, COUNTRY,
                        ZIP_CODE)>
<!ELEMENT ADDRESS (#PCDATA)>
<!ELEMENT CITY (#PCDATA)>
<!ELEMENT STATE (#PCDATA)>
<!ELEMENT COUNTRY (#PCDATA)>
<!ELEMENT ZIP_CODE (#PCDATA)>
<!ELEMENT USER_INFO (NAME, USERNAME, ROLE)>
<!ELEMENT USERNAME (#PCDATA)>
<!ELEMENT ROLE (#PCDATA)>
<!-- SUMMARY -->
<!ELEMENT SUMMARY (SCAN_SUMMARY, VULN_SUMMARY?,
                  SENSITIVE_CONTENT_SUMMARY)>
<!ELEMENT SCAN_SUMMARY (SCAN_INFO*)>
<!ELEMENT SCAN_INFO (KEY, VALUE)>
<!ELEMENT KEY (#PCDATA)>
<!ELEMENT VALUE (#PCDATA)>
<!ELEMENT VULN_SUMMARY (VULN_GROUP*)>
<!ELEMENT VULN_GROUP (TITLE, SEVERITY_5, SEVERITY_4, SEVERITY_3,
                      SEVERITY_2, SEVERITY_1, TOTAL)>
<!ELEMENT SEVERITY_1 (#PCDATA)>
<!ELEMENT SEVERITY_2 (#PCDATA)>
```

```
<!ELEMENT SEVERITY_3 (#PCDATA)>
<!ELEMENT SEVERITY_4 (#PCDATA)>
<!ELEMENT SEVERITY_5 (#PCDATA)>
<!ELEMENT TOTAL (#PCDATA)>
<!ELEMENT SENSITIVE_CONTENT_SUMMARY (SENSITIVE_CONTENT_GROUP*)>
<!ELEMENT SENSITIVE_CONTENT_GROUP (TITLE, TOTAL)>
<!-- RESULTS -->
<!ELEMENT RESULTS (VULN_LIST?, SENSITIVE_CONTENT_LIST?,
                   INFO_LIST?)>
<!ELEMENT VULN_LIST (VULN*)>
<!ELEMENT VULN (GROUP, QID, TITLE, VULN_INSTANCES)>
<!ELEMENT VULN_INSTANCES (VULN_INSTANCE*)>
<!ELEMENT VULN_INSTANCE (HOST, PORT, URI, AUTHENTICATED?,
FORM_ENTRY_POINT?, PARAMS, FINDINGS)>
<!ELEMENT AUTHENTICATED (#PCDATA)>
<!ELEMENT FORM_ENTRY_POINT (#PCDATA)>
<!ELEMENT SENSITIVE_CONTENT_LIST (SENSITIVE_CONTENT*)>
<!ELEMENT SENSITIVE_CONTENT (GROUP, QID, TITLE,
                              SENSITIVE_CONTENT_INSTANCES)>
<!ELEMENT SENSITIVE_CONTENT_INSTANCES (SENSITIVE_CONTENT_INSTANCE*)>
<!ELEMENT SENSITIVE_CONTENT_INSTANCE (HOST, PORT, URI, CONTENT?,
                                       FINDINGS)>

<!ELEMENT INFO_LIST (INFO*)>
<!ELEMENT INFO (QID, TITLE, RESULT)>
<!ELEMENT GROUP (#PCDATA)>
<!ELEMENT QID (#PCDATA)>
<!ELEMENT TITLE (#PCDATA)>
<!ELEMENT HOST (#PCDATA)>
<!ELEMENT PORT (#PCDATA)>
<!ELEMENT URI (#PCDATA)>
<!ELEMENT CONTENT (#PCDATA)>
<!ELEMENT PARAMS (#PCDATA)>
<!ELEMENT FINDINGS (FINDING*)>
<!ELEMENT FINDING (PAYLOAD?, RESULT)>
<!ELEMENT PAYLOAD (#PCDATA)>
<!ELEMENT RESULT (#PCDATA)>
<!ATTLIST RESULT base64 (true|false) "false">
```

# Schedules

## Schedule Count

`/qps/rest/3.0/count/was/wasscanschedule`

[GET] [POST]

Returns the total number of schedules in the user's account. Input elements are optional and are used to filter the number of schedules included in the count.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes scan targets in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. All dates must be entered in UTC date/time format. See [Reference: WasScanSchedule](#) for descriptions of these <WasScanSchedule> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) The schedule ID. This element is assigned by the service and is required for a certain type of request.
name	(text) The user-defined schedule name (maximum 256 characters).
owner.id	(integer) ID associated with the owner who created the schedule.

createdDate	(date) The date when the schedule was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the schedule was created in WAS, in UTC date/time format.
type	(keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.
webApp.name	(text) The name of the web application being scanned.
webApp.id	(integer) The ID of the web application being scanned.
webApp.tags (with operator="NONE")	Tags associated with the web application being scanned.
webApp.tags.id	(integer) ID of the tag applied to the web application being scanned.
invalid	(boolean) Indicates the schedule is invalid. The web application to which the schedule was applied is deleted and hence the schedule is invalid.
active	(boolean) Indicates whether the schedule is active or not. True indicates active schedule.

### Sample - Get count of schedules in user's account

Return the number (count) of all schedules in the user's scope.

#### API request

```
curl -u "USERNAME:PASSWORD"  
https://qualysapi.qualys.com/qps/rest/3.0/count/was/wasscanschedule"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>15</count>
</ServiceResponse>
```

### Sample - Get count of schedules with a criteria

Return the number (count) of schedules for discovery scan type.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/wasscanschedule"
< file.xml
Note: "file.xml" contains the request POST data.
```

#### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="type" operator="EQUALS">DISCOVERY</Criteria>
  </filters>
</ServiceRequest>
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>3</count>
</ServiceResponse>
```

### Sample - Get count of schedules for web applications without tags

Return the number (count) of schedules for web application that are not tagged..

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/wasscanschedule"
< file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <filters>
    <Criteria field="webApp.tags" operator="NONE"></Criteria>
  </filters>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
</ServiceResponse>
```

**Sample - Get count of schedules for web applications with tags**

Return the number (count) of schedules for web applications that are tagged..

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/wasscanschedule"
< file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <filters>
    <Criteria field="webApp.tags.id"
operator="EQUALS">1516928</Criteria>
```

```
<Criteria field="webApp.tags.id"
operator="EQUALS">1234567</Criteria>
</filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
</ServiceResponse>
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd)/qps/xsd/3.0/was/wasscanschedule.xsd

## Search Schedule

/qps/rest/3.0/search/was/wasscanschedule

[POST]

Returns a list of scheduled scans on web applications which are in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes scan targets in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. All dates must be entered in UTC date/time format. See [Reference: WasScanSchedule](#) for descriptions of these <WasScanSchedule> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) The schedule ID. This element is assigned by the service and is required for a certain type of request.
name	(text) The user-defined schedule name (maximum 256 characters).
owner.id	(integer) ID associated with the owner who created the schedule.
createdDate	(date) The date when the schedule was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the schedule was created in WAS, in UTC date/time format.

active	(boolean) Indicates whether the schedule is active or not. True indicates active schedule.
type	(keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.
webApp.name	(text) The name of the web application being scanned.
webApp.id	(integer) The ID of the web application being scanned.
webApp.tags (with operator="NONE")	Tags associated with the web application being scanned.
webApp.tags.id	(integer) ID of the tag applied to the web application being scanned.
invalid	(boolean) Indicates the schedule is invalid. The web application to which the schedule was applied is deleted and hence the schedule is invalid.
lastScan (with operation="NONE")	(boolean) Indicates if the last scan was performed or not. True indicates that the last scan was performed.
lastScan.launchedDate	(date) Date when the last scan was launched on the web application, in UTC date/time format.
lastScan.status	(keyword) Scan status reported by last web application scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR, CANCELED)
multi	(boolean) Indicates if the scheduled scan is single scan or multiple scan.

## Sample - List of schedules never launched

Let us view a list of all schedules that are in the user's scope but were not launched.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscanschedule
< file.xml"
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="lastScan" operator="NONE"></Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WasScanSchedule>
      <id>171425669</id>
      <name><![CDATA[Web Application Vulnerability Scan - 2017-Aug-
19]]></name>
      <owner>
        <id>8792415669</id>
      </owner>
      <active>>false</active>
      <type>VULNERABILITY</type>
      <target>
        <webApp>
          <id>1296335669</id>
          <name><![CDATA[My Web Application]]></name>
          <url><![CDATA[http://10.10.1.100]]></url>
        </webApp>
      </target>
    </WasScanSchedule>
  </data>
</ServiceResponse>
```

```

    <webAppAuthRecord>
      <id>175535669</id>
      <name><![CDATA[AR1]]></name>
    </webAppAuthRecord>
    <scannerAppliance>
      <type>EXTERNAL</type>
    </scannerAppliance>
  </target>
</profile>
  <id>716315669</id>
  <name><![CDATA[Copy of Initial WAS Options]]></name>
</profile>
<scheduling>
  <startDate>2017-08-19T12:30:00Z</startDate>
  <timeZone>
    <code>America/Dawson</code>
    <offset>-07:00</offset>
  </timeZone>
  <occurrenceType>ONCE</occurrenceType>
</scheduling>
<createdDate>2017-08-19T19:30:49Z</createdDate>
<updatedAtDate>2017-08-19T19:30:50Z</updatedAtDate>
</WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - List launched schedules

Let us view a list of all schedules that are in the user's scope and were launched.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscanschedule"
< file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="lastScan.status"
operator="IN">FINISHED,ERROR</Criteria>

```

```

    <Criteria field="lastScan.launchedDate"
operator="LESSER">2017-08-19</Criteria>
    </filters>
</ServiceRequest>

```

## XML response

```

...
</WasScanSchedule>
<WasScanSchedule>
  <id>97354000</id>
  <name><![CDATA[Schedule Notification]]></name>
  <owner>
    <id>334527</id>
  </owner>
  <active>>false</active>
  <type>VULNERABILITY</type>
  <target>
    <webApp>
      <id>1061764000</id>
      <name><![CDATA[My Web App]]></name>
      <url><![CDATA[http://10.10.26.238]]></url>
    </webApp>
    <webAppAuthRecord>
      <id>8753</id>
      <name><![CDATA[Auth Record 1]]></name>
    </webAppAuthRecord>
    <scannerAppliance>
      <type>EXTERNAL</type>
    </scannerAppliance>
  </target>
  <profile>
    <id>55784</id>
    <name><![CDATA[Initial WAS Options]]></name>
  </profile>
  <scheduling>
    <startDate>2017-05-06T18:22:00Z</startDate>
    <timeZone>
      <code>America/Dawson</code>
      <offset>-07:00</offset>
    </timeZone>
    <occurrenceType>DAILY</occurrenceType>
    <occurrence>
      <dailyOccurrence>
        <everyNDays>1</everyNDays>

```

```

    </dailyOccurrence>
  </occurrence>
</scheduling>
<lastScan>
  <id>14929668885</id>
  <launchedDate>2017-05-12T01:22:02Z</launchedDate>
  <status>FINISHED</status>
</lastScan>
<createdDate>2017-05-06T23:17:23Z</createdDate>
<updatedAt>2017-05-13T01:22:02Z</updatedAt>
</WasScanSchedule>

```

### Sample - List schedules no criteria

Let us view a list of all schedules that are in the user's scope and were launched.

#### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscanschedule"
< file.xml

```

Note: "file.xml" contains the request POST data. Specify an empty file, since no search criteria is being specified.

#### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WasScanSchedule>
      <id>649146</id>
      <name>
        <![CDATA[Web Application Vulnerability Scan - 2018-10-
08]]>
      </name>
      <owner>
        <id>412791</id>

```

```

</owner>
<active>true</active>
<multi>>false</multi>
<type>VULNERABILITY</type>
<target>
  <webApp>
    <id>8077389</id>
    <name>
      <![CDATA[SampleWebApp_1538665472012 ]]>
    </name>
    <url>
      <![CDATA[http://funkytown.vuln.qa.example.com:
80/cassium/xss/]]>
    </url>
  </webApp>
  <scannerAppliance>
    <type>EXTERNAL</type>
  </scannerAppliance>
  <cancelOption>SPECIFIC</cancelOption>
</target>
<profile>
  <id>1162483</id>
  <name>
    <![CDATA[Option Profile]]>
  </name>
</profile>
<scheduling>
  <startDate>2018-10-08T16:41:00Z</startDate>
  <timeZone>
    <code>Asia/Colombo</code>
    <offset>+05:30</offset>
  </timeZone>
  <occurrenceType>ONCE</occurrenceType>
</scheduling>
<nextLaunchDate>2018-10-09T11:11:00Z</nextLaunchDate>
<createdDate>2018-10-08T11:12:28Z</createdDate>
<updatedAt>2018-10-08T11:12:29Z</updatedAt>
</WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - List active schedules

Let us view a list of all schedules that are in the user's scope and were launched.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/wasscanschedule"
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="active" operator="EQUALS">true</Criteria>
    <Criteria field="type"
operator="EQUALS">VULNERABILITY</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <WasScanSchedule>
      <id>649146</id>
      <name>
        <![CDATA[Web Application Vulnerability Scan - 2018-10-
08]]>
      </name>
      <owner>
        <id>412791</id>
      </owner>
      <active>>true</active>
      <multi>>false</multi>
      <type>VULNERABILITY</type>
      <target>
        <webApp>
```

```

      <id>8077389</id>
      <name>
        <![CDATA[SampleWebApp_1538665472012 ]]>
      </name>
      <url>
        <![CDATA[http://funkytown.vuln.qa.example.com:
80/cassium/xss/]]>
      </url>
    </webApp>
    <scannerAppliance>
      <type>EXTERNAL</type>
    </scannerAppliance>
    <cancelOption>SPECIFIC</cancelOption>
  </target>
</profile>
  <id>1162483</id>
  <name>
    <![CDATA[Option Profile]]>
  </name>
</profile>
<cheduling>
  <startDate>2018-10-08T16:41:00Z</startDate>
  <timeZone>
    <code>Asia/Colombo</code>
    <offset>+05:30</offset>
  </timeZone>
  <occurrenceType>ONCE</occurrenceType>
</cheduling>
<nextLaunchDate>2018-10-09T11:11:00Z</nextLaunchDate>
<createdDate>2018-10-08T11:12:28Z</createdDate>
<updatedAt>2018-10-08T11:12:29Z</updatedAt>
</WasScanSchedule>
</data>
</ServiceResponse>

```

## XSD

[platform API server](#)/qps/xsd/3.0/was/webappauthrecord.xsd

## Get Schedule Details

/qps/rest/3.0/get/was/wasscanschedule/<id>

[GET]

View details for a scheduled scan on a web application which is in the user's scope. Want to find a schedule ID to use as input? See [Search schedules](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes schedules in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies a schedule.

[Click here for available operators](#)

### Sample - View schedule details

Let us view details for schedule with ID 714393.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/wasscanschedule/714393"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">  
<responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WasScanSchedule>  
      <id>714393</id>  
      <name>
```

```

    <![CDATA[Web schedVulnerability Scan - 2017-06-30]]>
  </name>
  <owner>
    <id>2473353</id>
    <username>username</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </owner>
  <active>>false</active>
  <multi>>true</multi>
  <type>VULNERABILITY</type>
  <target>
    <tags>
      <included>
        <option>ALL</option>
        <tagList>
          <list>
            <Tag>
              <id>12075819</id>
              <name>
                <![CDATA[New_tag]]>
              </name>
            </Tag>
            <Tag>
              <id>2685657</id>
              <name>
                <![CDATA[Business Units]]>
              </name>
            </Tag>
          </list>
        </tagList>
      </included>
    </tags>
    <scannerAppliance>
      <type>EXTERNAL</type>
    </scannerAppliance>
    <cancelOption>DEFAULT</cancelOption>
    <authRecordOption>DEFAULT</authRecordOption>
    <profileOption>DEFAULT</profileOption>
    <scannerOption>DEFAULT</scannerOption>
    <randomizeScan>>false</randomizeScan>
    <useDnsOverride>>false</useDnsOverride>
  </target>
  <profile>
    <id>598333</id>

```

```

    <name>
      <![CDATA[Initial WAS Options]]>
    </name>
  </profile>
  <scheduling>
    <startDate>2017-06-30T11:26:00Z</startDate>
    <timeZone>
      <code>Asia/Colombo</code>
      <offset>+05:30</offset>
    </timeZone>
    <occurrenceType>ONCE</occurrenceType>
  </scheduling>
  <notification>
    <active>>false</active>
    <reschedule>>false</reschedule>
    <delay>
      <nb>1</nb>
      <scale>DAY</scale>
    </delay>
    <message>
      <![CDATA[A Qualys scan is scheduled to start soon.]]>
    </message>
  </notification>
  <launchedCount>0</launchedCount>
  <createdDate>2017-06-30T05:57:12Z</createdDate>
  <createdBy>
    <id>2473353</id>
    <username>username</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </createdBy>
  <updatedAt>2017-07-01T05:56:02Z</updatedAt>
  <updatedBy>
    <id>2473353</id>
    <username>username</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </updatedBy>
  <sendMail>>true</sendMail>
  <sendOneMail>>true</sendOneMail>
  <enableWAFAuth>>false</enableWAFAuth>
</WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - View schedule details (progressive scan)

The progressiveScanning element will be included in the call response, if Progressive Scanning is enabled for the subscription.

### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/wasscanschedule/8183"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse  
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
  xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WasScanSchedule>  
      <id>8183</id>  
      <name>  
        <![CDATA[WASUI-3772 #3]]>  
      </name>  
      ...  
      <progressiveScanning>ENABLED</progressiveScanning>  
      ...
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd)/qps/xsd/3.0/was/wasscanschedule.xsd

## Create a Schedule (single web application)

/qps/rest/3.0/create/was/wasscanschedule

[POST]

Create a scheduled scan on a web application which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Create WAS Schedule" permission. The output includes schedules in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: WasScanSchedule](#) for descriptions of these <WasScanSchedule> elements

[Click here for available operators](#)

Parameter	Description
name	(text) Name of the schedule.
target.webApp.id <sub>1</sub>	(integer) The web applications to be scanned.
type	(keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.
profile.id <sub>2</sub>	(integer) The name of the option profile that includes scan settings. The service provides the profile "Initial WAS Options" and we recommend this to get started.  Example: <profile> <name>Initial WAS Options</name>

Qualys Web Application Scanning API  
Schedules

</profile>

startDate	(date) The date when the schedule starts in UTC date/time format.
timeZone	(text) The timezone in which the scan is scheduled in UTC date/time format.
occurrenceType	(keyword) The frequency of the scheduled scan : ONCE, DAILY, WEEKLY or MONTHLY.
notification	(boolean) A flag indicating whether email notification is enabled for scheduled scan.
reschedule	(boolean) Set this flag to reschedule the scan.
target.scannerAppliance.type	(keyword) The type of scanner appliance used for the scan: EXTERNAL or INTERNAL or scannerTags.
target.scannerAppliance.friendlyName	(text) Name of the scanner appliance used for the scan.
target.scannerTags.set.Tag.id	(integer) The scanner associated with the tag (identified by the specified tag ID) is picked for the scan.
target.webAppAuthRecord.id or target.webAppAuthRecord.isDefault	Decides the authentication record to be used for the scan.  target.webAppAuthRecord.id (integer): Specify the web application's authentication record ID to use the specific authentication record.  target.webAppAuthRecord.isDefault (boolean): Set to true to use the default web application's authentication record for the scan.
options	(keyword: ANY, ALL) Decides which web

## Qualys Web Application Scanning API Schedules

applications should be excluded from the scan.

ALL : Only the web applications associated with all the specified tags are excluded from the scan.

ANY : Only the web applications associated with any of the specified tags are excluded from the scan.

proxy.id

(integer) The proxy for scanning the target web application.

Example:

```
<proxy>  
  <id>12345</id>  
</proxy>
```

dnsOverride.id

(integer) The DNS override record for scanning the target web application.

Example:

```
<dnsOverride>  
  <id>67890</id>  
</dnsOverride>
```

cancelOption

(keyword: DEFAULT, SPECIFIC)

set to DEFAULT - Forces the use of the target web app's cancelScans option if set, else fall back to the one passed in to the API while launching the scan.

set to SPECIFIC - Always use the cancel scan option passed while launching the scan.

sendMail

(boolean) Set to false to disable scan complete email notifications.

Example:<sendMail>>false</sendMail>

sendMailFromAddressOption

Identifies the sender of the scan complete notifications. The valid values are: QUALYS\_SUPPORT and OWNER. OWNER means the user whose account is used to create the schedule.

Example:<sendMailFromAddressOption>QUALYS\_SUPPORT</sendMailFromAddressOption>

Example:<sendMailFromAddressOption>OWNER</sendMailFromAddressOption>

To set this parameter, the sendMail parameter must be set to true. If the sendMail parameter is true, then sendMailFromAddressOption is by default set to QUALYS\_SUPPORT. You can change the value of the parameter to OWNER.

1 The element target must have at least tags or web applications specified.

2 The element profile (text) is required unless the target has a default option profile.

### Sample - Create a new weekly schedule

Let us create a new web application called “My Web Application” that has the starting URL “http://mywebapp.com”. The default web application settings are assigned automatically.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/create/was/wasscanschedule"< file.xml
```

Note: “file.xml” contains the request POST data.

#### Request POST data

```
<ServiceRequest>  
<data>  
  <WasScanSchedule>  
    <name><![CDATA[Create Schedule from API3 - using Reschedule]]></name>
```

```

<type>VULNERABILITY</type>
<active>false</active>
<scheduling>
  <cancelAfterNHours>8</cancelAfterNHours>
  <startDate>2017-09-06T09:50:11Z</startDate>
  <timeZone>
    <code>America/Vancouver</code>
    <offset>-07:00</offset>
  </timeZone>
  <occurrenceType>WEEKLY</occurrenceType>
  <occurrence>
    <weeklyOccurrence>
      <everyNWeeks>2</everyNWeeks>
      <occurrenceCount>20</occurrenceCount>
      <onDays>
        <WeekDay>SATURDAY</WeekDay>
        <WeekDay>SUNDAY</WeekDay>
      </onDays>
    </weeklyOccurrence>
  </occurrence>
</scheduling>
<notification>
  <active>true</active>
  <reschedule>true</reschedule>
  <delay>
    <nb>1</nb>
    <scale>DAY</scale>
  </delay>
  <message><![CDATA[A Qualys scan is scheduled to start
soon.]]></message>
</notification>
<target>
  <webApp>
    <id>1296335669</id>
  </webApp>
  <webAppAuthRecord>
    <id>175535669</id>
  </webAppAuthRecord>
</target>
<profile>
  <id>712265669</id>
</profile>
</WasScanSchedule>
</data>
</ServiceRequest>

```

**XML response**

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
      <id>203285669</id>
      <name><![CDATA[Create Schedule from API3 - using
Reschedule]]></name>
      <owner>
        <id>8792415669</id>
        <username>quays_cp</username>
        <firstName><![CDATA[Customer_2.6_1]]></firstName>
        <lastName><![CDATA[pocm]]></lastName>
      </owner>
      <active>>false</active>
      <type>VULNERABILITY</type>
      <target>
        <webApp>
          <id>1296335669</id>
          <name><![CDATA[My Web Application]]></name>
          <url><![CDATA[http://10.10.26.238]]></url>
        </webApp>
        <webAppAuthRecord>
          <id>175535669</id>
          <name><![CDATA[AR1]]></name>
        </webAppAuthRecord>
        <scannerAppliance>
          <type>EXTERNAL</type>
        </scannerAppliance>
      </target>
      <profile>
        <id>712265669</id>
        <name><![CDATA[Initial WAS Options]]></name>
      </profile>
      <scheduling>
        <startDate>2017-09-06T09:50:00Z</startDate>
        <timeZone>
          <code>America/Vancouver</code>
          <offset>-07:00</offset>
        </timeZone>
        <occurrenceType>ONCE</occurrenceType>
      </scheduling>
    </WasScanSchedule>
  </data>
</ServiceResponse>

```

```

    <cancelAfterNHours>8</cancelAfterNHours>
  </scheduling>
  <notification>
    <active>true</active>
    <reschedule>true</reschedule>
    <delay>
      <nb>1</nb>
      <scale>DAY</scale>
    </delay>
    <message><![CDATA[A Qualys scan is scheduled to start
soon.]]></message>
  </notification>
  <launchedCount>0</launchedCount>
  <createdDate>2017-08-27T22:30:59Z</createdDate>
  <createdBy>
    <id>8792415669</id>
    <username>quays_cp</username>
    <firstName><![CDATA[Customer_2.6_1]]></firstName>
    <lastName><![CDATA[pocm]]></lastName>
  </createdBy>
  <updatedAt>2017-08-27T22:31:00Z</updatedAt>
  <updatedBy>
    <id>8792415669</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </updatedBy>
  <sendMail>true</sendMail>
  <sendOneMail>true</sendOneMail>
</WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - Create a new schedule - cancel scan option

Create a new vulnerability scan schedule on web app ID 2376281 and set the cancel scan option to SPECIFIC. Scans launched from this schedule will always use the cancel scan option passed with the schedule settings and will override the target web app's cancel scan setting, if set.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
```

```
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/wasscanschedule"
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <WasScanSchedule>
      <name><![CDATA[My Scan Schedule]]></name>
      <type>VULNERABILITY</type>
      <scheduling>
        <cancelAfterNHours>7</cancelAfterNHours>
        <startDate>2017-09-30T13:11:00Z</startDate>
        <timeZone>
          <code>America/Dawson</code>
        </timeZone>
        <occurrenceType>ONCE</occurrenceType>
      </scheduling>
      <target>
        <webApp>
          <id>2376281</id>
        </webApp>
        <scannerAppliance>
          <type>EXTERNAL</type>
        </scannerAppliance>
        <cancelOption>SPECIFIC</cancelOption>
      </target>
      <profile>
        <id>332147</id>
      </profile>
    </WasScanSchedule>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
```

```

<id>325624</id>
<name><![CDATA[My Scan Schedule]]></name>
<owner>
  <id>2086786</id>
  <username>user_john</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</owner>
<active>true</active>
<type>VULNERABILITY</type>
<target>
  <webApp>
    <id>2376281</id>
    <name><![CDATA[My Web App]]></name>
    <url><![CDATA[http://10.10.26.238]]></url>
  </webApp>
  <scannerAppliance>
    <type>EXTERNAL</type>
  </scannerAppliance>
  <cancelOption>SPECIFIC</cancelOption>
</target>
<progressiveScanning>DEFAULT</progressiveScanning>
<profile>
  <id>332147</id>
  <name><![CDATA[10 links]]></name>
</profile>
<scheduling>
  <startDate>2017-09-30T13:11:00Z</startDate>
  <timeZone>
    <code>America/Dawson</code>
    <offset>-07:00</offset>
  </timeZone>
  <occurrenceType>ONCE</occurrenceType>
  <cancelAfterNHours>7</cancelAfterNHours>
</scheduling>
<notification>
  <active>>false</active>
</notification>
<nextLaunchDate>2017-09-30T20:11:00Z</nextLaunchDate>
<launchedCount>0</launchedCount>
<createdDate>2017-06-26T20:54:30Z</createdDate>
<createdBy>
  <id>2086786</id>
  <username>user_john</username>
  <firstName><![CDATA[John]]></firstName>

```

```

    <lastName><![CDATA[Doe]]></lastName>
  </createdBy>
  <updatedAt>2017-06-26T20:54:30Z</updatedAt>
  <updatedBy>
    <id>2086786</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </updatedBy>
  <sendMail>true</sendMail>
  <sendOneMail>false</sendOneMail>
</WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - Create a new schedule - assign multiple scanners

Let us schedule a discovery scan on the web application and assign the pool of scanners using the asset tag ID.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/wasscanschedule"
< file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <data>
    <WasScanSchedule>
      <name><![CDATA[Scheduled Scan With Pool of Internal Scanners]]>
      </name>
      <type>VULNERABILITY</type>
    <active>false</active>
    <scheduling>
      <cancelAfterNHours>10</cancelAfterNHours>
      <startDate>2017-01-10T13:55:35Z</startDate>
      <timeZone>
        <code>Europe/Istanbul</code>
        <offset>+02:00</offset>
      </timeZone>
      <occurrenceType>ONCE</occurrenceType>
    </scheduling>
  </data>
</ServiceRequest>

```

```

</scheduling>
<notification>
  <active>>false</active>
</notification>
<target>
  <webApp><id>522066</id></webApp>
  <scannerTags>
    <set>
      <Tag>
        <id>15415353311147</id>
      </Tag>
    </set>
  </scannerTags>
</target>
<profile><id>53483</id></profile>
</WasScanSchedule>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
<responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
      <id>141147</id>
      <name>
        <![CDATA[Scheduled Scan With Pool of Internal
Scanners]]>
      </name>
      <owner>
        <id>1056860</id>
        <username>user_john</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
      </owner>
      <active>>false</active>
      <multi>>false</multi>
      <type>VULNERABILITY</type>
      <target>
        <webApp>

```

```

        <id>522065</id>
        <name><![CDATA[My Web Application]]></name>
        <url><![CDATA[http://mywebapp.com]]></url>
    </webApp>
    <scannerTags>
        <set>
            <Tag>
                <id>8461819</id>
            </Tag>
        </set>
    </scannerTags>
</target>
<progressiveScanning>DEFAULT</progressiveScanning>
<profile>
    <id>194283</id>
    <name>
        <![CDATA[Initial WAS Options]]>
    </name>
</profile>
<scheduling>
    <startDate>2017-01-10T13:55:00Z</startDate>
    <timeZone>
        <code>Europe/Istanbul</code>
        <offset>+02:00</offset>
    </timeZone>
    <occurrenceType>ONCE</occurrenceType>
    <cancelAfterNHours>10</cancelAfterNHours>
</scheduling>
<notification>
    <active>>false</active>
    <reschedule>>false</reschedule>
</notification>
<launchedCount>0</launchedCount>
<createdDate>2017-01-12T11:54:07Z</createdDate>
<createdBy>
    <id>1056860</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
</createdBy>
<updatedDate>2017-01-12T11:54:09Z</updatedDate>
<updatedBy>
    <id>1056860</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>

```

```

        <lastName><![CDATA[Doe]]></lastName>
    </updatedBy>
    <sendMail>true</sendMail>
    <sendOneMail>false</sendOneMail>
</WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - Create or update schedule for progressive scanning

The user will be able to set progressiveScanning to ENABLED, DISABLED or DEFAULT, if progressiveScanning is enabled for the subscription. If this option is not set for a new schedule, the value DEFAULT is used.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/wasscanschedule"
< file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <data>
    <WasScanSchedule>
      <name><![CDATA[Schedule with enabled
progressiveScanning]]></name>
      <type>VULNERABILITY</type>
      <active>false</active>
      <scheduling>
        <startDate>2019-01-30T12:40:27Z</startDate>
        <timeZone>
          <code>Asia/Kolkata</code>
          <offset>+05:30</offset>
        </timeZone>
        <occurrenceType>ONCE</occurrenceType>
      </scheduling>
      <notification>
        <active>true</active>
        <delay>
          <nb>1</nb>
          <scale>DAY</scale>
        </delay>

```

```

        <message><![CDATA[A scan is scheduled to start
soon.]]></message>
    </notification>
    <target>
        <webApps>
            <set>
                <WebApp><id>8389207</id></WebApp>
            </set>
        </webApps>
        <scannerAppliance>
            <type>EXTERNAL</type>
        </scannerAppliance>
    </target>
    <progressiveScanning>ENABLED</progressiveScanning>
    <profile>
        <id>53483</id>
    </profile>
</WasScanSchedule>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
    <responseCode>SUCCESS</responseCode>
    <count>1</count>
    <data>
        <WasScanSchedule>
            <id>8831789</id>
            <name>
                <![CDATA[Schedule with enabled progressiveScanning]]>
            </name>
            <owner>
                <id>1056860</id>
                <username>user_john</username>
                <firstName>
                    <![CDATA[John]]>
                </firstName>
                <lastName>
                    <![CDATA[Doe]]>
                </lastName>
            </owner>

```

```
<active>false</active>
<multi>false</multi>
<type>VULNERABILITY</type>
<target>
  <webApp>
    <id>8389207</id>
    <name>
      <![CDATA[My Web Application]]>
    </name>
    <url>
      <![CDATA[http://mywebapp.com]]>
    </url>
  </webApp>
  <scannerAppliance>
    <type>EXTERNAL</type>
  </scannerAppliance>
</target>
<progressiveScanning>ENABLED</progressiveScanning>
<profile>
  <id>53483</id>
  <name>
    <![CDATA[Scan OP]]>
  </name>
</profile>
<scheduling>
  <startDate>2019-01-30T12:40:00Z</startDate>
  <timeZone>
    <code>Asia/Kolkata</code>
    <offset>+05:30</offset>
  </timeZone>
  <occurrenceType>ONCE</occurrenceType>
</scheduling>
<notification>
  <active>true</active>
  <reschedule>false</reschedule>
  <delay>
    <nb>1</nb>
    <scale>DAY</scale>
  </delay>
  <message>
    <![CDATA[A scan is scheduled to start soon.]]>
  </message>
</notification>
<launchedCount>0</launchedCount>
<createdDate>2019-02-26T07:17:22Z</createdDate>
```

```

    <createdBy>
      <id>1056860</id>
      <username>user_john</username>
      <firstName>
        <![CDATA[John]]>
      </firstName>
      <lastName>
        <![CDATA[Doe]]>
      </lastName>
    </createdBy>
    <updatedAt>2019-02-26T07:17:22Z</updatedAt>
    <updatedBy>
      <id>1056860</id>
      <username>user_john</username>
      <firstName>
        <![CDATA[John]]>
      </firstName>
      <lastName>
        <![CDATA[Doe]]>
      </lastName>
    </updatedBy>
    <sendMail>true</sendMail>
    <sendOneMail>false</sendOneMail>
    <enableWAFAuth>false</enableWAFAuth>
  </WasScanSchedule>
</data>
</ServiceResponse>

```

If Progressive Scanning is not enabled for the subscription, the progressiveScanning element cannot be provided, otherwise an error will be returned.

### XML response (error)

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">
  <responseCode>INVALID_REQUEST</responseCode>
  <responseErrorDetails>
    <errorMessage>Progressive scanning is not enabled in your
subscription.</errorMessage>

```

```
<errorResolution>Please check with your account manager to  
enable this option.</errorResolution>  
</responseErrorDetails>  
</ServiceResponse>
```

## XSD

[<platform API server>](#)/qps/xsd/3.0/was/wasscanschedule.xsd

## Create Schedules (Multiple)

/qps/rest/3.0/create/was/wasscanschedule

[POST]

You can schedule a Multi-Scan to run automatically, on a regular basis. This way you always have the most up-to-date security information in your account.

A Multi-Scan allows you to scan any number of web applications. This feature enables you to scan hundreds or even thousands of web applications you may have in your organization with granular insight into what scans are running and which ones are complete.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Create WAS Schedule" permission. The output includes schedules in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: WasScanSchedule](#) for descriptions of these <WasScanSchedule> elements.

[Click here for available operators](#)

Parameter	Description
name	(text) Name of the schedule.
webApps.id or tags.id	(integer) The web applications to be scanned.  webApps.id: Specify the web application ID to include it in the scan.  tags.id: Specify the tag ID associated with the

*Qualys Web Application Scanning API*  
*Schedules*

web applications to be scanned.

target.tags.excluded.option	(keyword: ALL or ANY) Decides which web applications should be excluded from the scan. ALL : Only the web applications associated with all the specified tags are excluded from the scan. ANY : Only the web applications associated with any of the specified tags are excluded from the scan.
target.tags.excluded.tagList.Tag.id	(integer) The web applications associated with the tag (identified by the specified tag ID) are excluded from the scan.
target.tags.included.option	(keyword: ALL or ANY) Decides which web applications should be excluded from the scan.  ALL : Only the web applications associated with all the specified tags are excluded from the scan.  ANY : Only the web applications associated with any of the specified tags are excluded from the scan.
target.tags.included.tagList.Tag.id	(integer) The web applications associated with the tag (identified by the specified tag ID) are included in the scan.
type	(keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.
profile.id (integer) <sub>2</sub>	(integer) The name of the option profile that includes scan settings. The service provides the profile “Initial WAS Options” and we recommend this to get started.  Example:  <profile>

## Qualys Web Application Scanning API

### Schedules

```
<name>Initial WAS Options</name>
```

```
</profile>
```

startDate (date)	(date) The date when the schedule starts in UTC date/time format.
timeZone (text)	(text) The timezone in which the scan is scheduled in UTC date/time format.
occurrenceType	(keyword) The frequency of the scheduled scan : ONCE, DAILY, WEEKLY or MONTHLY.
notification	(boolean)A flag indicating whether email notification is enabled for scheduled scan.
reschedule	(boolean) Set this flag to reschedule the scan.
target.authRecordOption	(integer) Defines the authentication record to be used during the scan.  Set to SPECIFIC -Always use the authRecord passed while launching the scan.  Set to DEFAULT- Forces the use of the authRecord, if set, else fall back to the one passed in to the API while launching the scan.
target.profileOption	(keyword: ALL or ANY) Defines the option profile to be used during the scan.  Set to SPECIFIC - Always use the optionProfile passed while launching the scan.  Set to DEFAULT - Forces the use of the optionProfile if set, else fall back to the one passed in to the API while launching the scan.
target.scannerOption	(integer) Defines the scanner appliance to be used during the scan.

## Qualys Web Application Scanning API

### Schedules

Set to SPECIFIC - Always use the scanner passed while launching the scan

Set to DEFAULT - Forces the use of the scanner if set, else fall back to the one passed in to the API while launching the scan.

target.randomizeScan

Allows the service to scan the selected web applications in random order. The randomness will help prevent network slowdowns and/or errors

target.scannerAppliance.type

(keyword: EXTERNAL or INTERNAL or scannerTags) Type of the scanner appliance to be used for the scan.

target.scannerAppliance.friendlyName

(text) Name of the scanner appliance being used for the scan.

cancelOption

set to DEFAULT - Forces the use of the target web app's cancelScans option if set, else fall back to the one passed in to the API while launching the scan.

set to SPECIFIC - Always use the cancel scan option passed while launching the scan.

sendMail

(boolean) Set to false to disable scan complete email notifications.

Example:<sendMail>>false</sendMail>

sendOneMail

(boolean) Set to true to send one email upon multi-scan completion. Set to false to send one email upon completion of each individual scan.

Example:<sendOneMail>>true</sendOneMail>

Note: sendOneMail is valid only when sendMail = true for a multi-scan (multiple web

## Qualys Web Application Scanning API Schedules

applications being scanned). If `sendMail` is set to `false`, `sendOneMail` will be ignored.

### `sendMailFromAddressOption`

Identifies the sender of the scan complete notifications. The valid values are: `QUALYS_SUPPORT` and `OWNER`. `OWNER` means the user whose account is used to create the schedule.

Example: `<sendMailFromAddressOption>QUALYS_SUPPORT</sendMailFromAddressOption>`

Example: `<sendMailFromAddressOption>OWNER</sendMailFromAddressOption>`

To set this parameter, the `sendMail` parameter must be set to `true`. If the `sendMail` parameter is `true`, then `sendMailFromAddressOption` is by default set to `QUALYS_SUPPORT`. You can change the value of the parameter to `OWNER`.

1 The element target must have at least tags or web applications specified.

2 The element profile (text) is required unless the target has a default option profile.

## Sample - Schedule a multi-scan

Let's schedule a multi-scan for two web applications by specifying the ID for the web applications.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/create/was/wasscanschedule"< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
```

```

<WasScanSchedule>
  <name>MultiSchedule_1497351121650</name>
  <type>VULNERABILITY</type>
  <active>>false</active>
  <scheduling>
    <cancelAfterNHours>8</cancelAfterNHours>
    <startDate>2017-06-13T21:51:57Z</startDate>
    <timeZone>
      <code>America/Vancouver</code>
      <offset>-07:00</offset>
    </timeZone>
    <occurrenceType>WEEKLY</occurrenceType>
    <occurrence>
      <weeklyOccurrence>
        <everyNWeeks>2</everyNWeeks>
        <occurrenceCount>20</occurrenceCount>
        <onDays>
          <WeekDay>SATURDAY</WeekDay>
        </onDays>
      </weeklyOccurrence>
    </occurrence>
  </scheduling>
  <notification>
    <active>>true</active>
    <reschedule>>true</reschedule>
    <delay>
      <nb>1</nb>
      <scale>DAY</scale>
    </delay>
    <message><![CDATA[A scan is scheduled to start
soon.]]></message>
  </notification>
  <target>
    <webApps>
      <set>
        <WebApp>
          <id>4331923</id>
        </WebApp>
        <WebApp>
          <id>4331924</id>
        </WebApp>
      </set>
    </webApps>
    <webAppAuthRecord>
      <id>583957</id>
  </target>

```

```

    </webAppAuthRecord>
    <scannerAppliance>
      <type>EXTERNAL</type>
    </scannerAppliance>
    <cancelOption>SPECIFIC</cancelOption>
    <authRecordOption>DEFAULT</authRecordOption>
    <profileOption>SPECIFIC</profileOption>
    <scannerOption>DEFAULT</scannerOption>
    <randomizeScan>true</randomizeScan>
    <useDnsOverride>true</useDnsOverride>
  </target>
  <profile>
    <id>1071133</id>
  </profile>
</WasScanSchedule>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/
was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
      <id>697193</id>
      <name><![CDATA[MultiSchedule_1497351121650]]></name>
      <owner>
        <id>2911477</id>
        <username>john_doe</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
      </owner>
      <active>>false</active>
      <multi>>true</multi>
      <type>VULNERABILITY</type>
      <target>
        <webApps>
          <list>
            <WebApp>
              <id>4331923</id>

```

```

        <name><![CDATA[web app
1497351058103]]></name>
<url><![CDATA[http://www.example.com/cassium/xss/]]></url>
        </WebApp>
        <WebApp>
            <id>4331924</id>
            <name><![CDATA[web app
1497351100446]]></name>
<url><![CDATA[http://www.example.com/cassium/xss/]]></url>
        </WebApp>
    </list>
</webApps>
<webAppAuthRecord>
    <id>583957</id>
    <name><![CDATA[Form and
Server]149735111801]]></name>
</webAppAuthRecord>
<scannerAppliance>
    <type>EXTERNAL</type>
</scannerAppliance>
<cancelOption>SPECIFIC</cancelOption>
<authRecordOption>DEFAULT</authRecordOption>
<profileOption>SPECIFIC</profileOption>
<scannerOption>DEFAULT</scannerOption>
<randomizeScan>true</randomizeScan>
<useDnsOverride>true</useDnsOverride>
</target>
<progressiveScanning>DEFAULT</progressiveScanning>
<profile>
    <id>1071133</id>
    <name><![CDATA[My Option Profile - with defaults
1497351048931]]></name>
</profile>
<scheduling>
    <startDate>2017-06-13T21:51:00Z</startDate>
    <timeZone>
        <code>America/Vancouver</code>
        <offset>-07:00</offset>
    </timeZone>
    <occurrenceType>WEEKLY</occurrenceType>
    <occurrence>
        <weeklyOccurrence>
            <everyNWeeks>2</everyNWeeks>
            <onDays>
                <WeekDay>SATURDAY</WeekDay>

```

```

        </onDays>
        <occurrenceCount>20</occurrenceCount>
    </weeklyOccurrence>
</occurrence>
    <cancelAfterNHours>8</cancelAfterNHours>
</scheduling>
<notification>
    <active>true</active>
    <reschedule>true</reschedule>
    <delay>
        <nb>1</nb>
        <scale>DAY</scale>
    </delay>
    <message><![CDATA[A scan is scheduled to start
soon.]]></message>
</notification>
    <launchedCount>0</launchedCount>
    <createdDate>2017-06-13T10:52:07Z</createdDate>
    <createdBy>
        <id>2911477</id>
        <username>john_doe</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
    </createdBy>
    <updatedAt>2017-06-13T10:52:09Z</updatedAt>
    <updatedBy>
        <id>2911477</id>
        <username>john_doe</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
    </updatedBy>
    <sendMail>true</sendMail>
    <sendOneMail>false</sendOneMail>
    <enableWAFAuth>false</enableWAFAuth>
</WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - Schedule a multi-scan with some criteria

Let's schedule a multi-scan for all the web applications that are associated with the tags specified in the request filter and configure scan completion notification to be sent after completion of the multi-scan.

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/wasscanschedule"
< file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <WasScanSchedule>
      <name>SampleSchedule</name>
      <type>VULNERABILITY</type>
      <active>>false</active>
      <scheduling>
        <cancelAfterNHours>8</cancelAfterNHours>
        <startDate>2017-06-13T21:51:57Z</startDate>
        <timeZone>
          <code>America/Vancouver</code>
          <offset>-07:00</offset>
        </timeZone>
        <occurrenceType>WEEKLY</occurrenceType>
        <occurrence>
          <weeklyOccurrence>
            <everyNWeeks>2</everyNWeeks>
            <occurrenceCount>20</occurrenceCount>
            <onDays>
              <WeekDay>SATURDAY</WeekDay>
            </onDays>
          </weeklyOccurrence>
        </occurrence>
      </scheduling>
      <notification>
        <active>>true</active>
        <reschedule>>true</reschedule>
        <delay>
          <nb>1</nb>
          <scale>DAY</scale>
        </delay>
        <message><![CDATA[A scan is scheduled to start
soon.]]></message>
      </notification>
      <target>
```

```

<tags>
  <included>
    <option>ALL</option>
    <tagList>
      <set>
        <Tag>
          <id>12017424</id>
        </Tag>
        <Tag>
          <id>12017228</id>
        </Tag>
      </set>
    </tagList>
  </included>
  <excluded>
    <option>ANY</option>
    <tagList>
      <set>
        <Tag>
          <id>12017228</id>
        </Tag>
      </set>
    </tagList>
  </excluded>
</tags>
<webAppAuthRecord>
  <id>583957</id>
</webAppAuthRecord>
<scannerAppliance>
  <type>EXTERNAL</type>
</scannerAppliance>
<cancelOption>SPECIFIC</cancelOption>
<authRecordOption>DEFAULT</authRecordOption>
<profileOption>SPECIFIC</profileOption>
<scannerOption>DEFAULT</scannerOption>
<randomizeScan>true</randomizeScan>
<useDnsOverride>true</useDnsOverride>
</target>
<profile>
  <id>1071133</id>
</profile>
<sendOneMail>>false</sendOneMail>
</WasScanSchedule>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
      <id>699795</id>
      <name>
        <![CDATA[Schedule a multi scan for multiple web
apps]]>
      </name>
      <owner>
        <id>2911477</id>
        <username>john_doe</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
      </owner>
      <active>>false</active>
      <multi>>true</multi>
      <type>VULNERABILITY</type>
      <target>
        <tags>
          <included>
            <option>ANY</option>
            <tagList>
              <list>
                <Tag>
                  <id>12017424</id>
                </Tag>
                <Tag>
                  <id>12017228</id>
                </Tag>
              </list>
            </tagList>
          </included>
          <excluded>
            <option>ANY</option>
            <tagList>
              <list>
                <Tag>
                  <id>12017228</id>
                </Tag>
              </list>
            </tagList>
          </excluded>
        </tags>
      </target>
    </WasScanSchedule>
  </data>
</ServiceResponse>

```

```

        </list>
      </tagList>
    </excluded>
  </tags>
  <webAppAuthRecord>
    <id>583957</id>
    <name>
      <![CDATA[Form and Server]149735111801]]>
    </name>
  </webAppAuthRecord>
  <scannerAppliance>
    <type>EXTERNAL</type>
  </scannerAppliance>
  <cancelOption>SPECIFIC</cancelOption>
  <authRecordOption>DEFAULT</authRecordOption>
  <profileOption>SPECIFIC</profileOption>
  <scannerOption>DEFAULT</scannerOption>
  <randomizeScan>true</randomizeScan>
  <useDnsOverride>true</useDnsOverride>
</target>
<progressiveScanning>DEFAULT</progressiveScanning>
<profile>
  <id>1071133</id>
  <name>
    <![CDATA[My Option Profile - with defaults
1497351048931]]>
  </name>
</profile>
<scheduling>
  <startDate>2017-06-13T21:51:00Z</startDate>
  <timeZone>
    <code>America/Vancouver</code>
    <offset>-07:00</offset>
  </timeZone>
  <occurrenceType>WEEKLY</occurrenceType>
  <occurrence>
    <weeklyOccurrence>
      <everyNWeeks>2</everyNWeeks>
      <onDays>
        <WeekDay>SATURDAY</WeekDay>
      </onDays>
      <occurrenceCount>20</occurrenceCount>
    </weeklyOccurrence>
  </occurrence>
  <cancelAfterNHours>8</cancelAfterNHours>

```

```
</scheduling>
<notification>
  <active>true</active>
  <reschedule>true</reschedule>
  <delay>
    <nb>1</nb>
    <scale>DAY</scale>
  </delay>
  <message>
    <![CDATA[A scan is scheduled to start soon.]]>
  </message>
</notification>
<launchedCount>0</launchedCount>
<createdDate>2017-06-15T09:19:09Z</createdDate>
<createdBy>
  <id>2911477</id>
  <username>john_doe</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</createdBy>
<updatedAt>2017-06-15T09:19:09Z</updatedAt>
<updatedBy>
  <id>2911477</id>
  <username>john_doe</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</updatedBy>
<sendMail>true</sendMail>
<sendOneMail>false</sendOneMail>
<enableWAFAuth>false</enableWAFAuth>
</WasScanSchedule>
</data>
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/wasscanschedule.xsd)/qps/xsd/3.0/was/wasscanschedule.xsd

## Update Schedule

/qps/rest/3.0/update/was/wasscanschedule/<id>

[POST]

Update a scheduled scan on a web application which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Edit WAS Schedule". Scan target must be within the user's scope.

### Input Parameters

The "id" (integer) element and the data to be updated in the schedule are required where "id" identifies a schedule. See [Reference: WasScanSchedule](#) for descriptions of all of the <WasScanSchedule> elements.

[Click here for available operators](#)

### Sample - Update a schedule by enabling notification for the same

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/wasscanschedule/  
1688" < file.xml
```

Note: "file.xml" contains the request POST data.

#### Request POST data

```
<ServiceRequest>  
  <data>  
    <WasScanSchedule>  
      <notification>  
        <active>true</active>  
        <delay>  
          <nb>4</nb>  
          <scale>DAY</scale>  
        </delay>
```

```

    <recipients>
      <set>
        <EmailAddress><![CDATA[name1@company.com]]></EmailAddress>

        <EmailAddress><![CDATA[name2@company.com]]></EmailAddress>

        <EmailAddress><![CDATA[name3@company.com]]></EmailAddress>

      </set>
    </recipients>
    <message><![CDATA[The schedule notification
message]]></message>
  </notification>
</WasScanSchedule>
</data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
      <id>1688</id>
    </WasScanSchedule>
  </data>
</ServiceResponse>

```

### Sample - Update notification to reschedule

#### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/wasscanschedule/
171425669" < file.xml
Note: "file.xml" contains the request POST data.

```

#### Request POST data

```

<ServiceRequest>

```

```

<data>
  <WasScanSchedule>
<name><![CDATA[Update Notification to enable Reschedule]]></name>
  <notification>
    <active>true</active>
    <reschedule>true</reschedule>
    <delay>
      <nb>1</nb>
      <scale>DAY</scale>
    </delay>
    <message><![CDATA[A Qualys scan is scheduled to start
soon.]]></message>
  </notification>
</WasScanSchedule>
</data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
      <id>171425669</id>
    </WasScanSchedule>
  </data>
</ServiceResponse>

```

## Sample - Update schedule to configure scan completion notification

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/wasscanschedule/
171425669" < file.xml
Note: "file.xml" contains the request POST data.

```

### Request POST data

```

<ServiceRequest>

```

```
<data>
  <WasScanSchedule>
    <name>Schedule with sendOneMail enabled</name>
    <sendMail>true</sendMail>
    <sendOneMail>true</sendOneMail>
  </WasScanSchedule>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
      <id>171425669</id>
    </WasScanSchedule>
  </data>
</ServiceResponse>
```

## XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd)/qps/xsd/3.0/was/wasscanschedule.xsd

## Activate an Existing Schedule

`/qps/rest/3.0/update/was/wasscanschedule/<id>`

`/qps/rest/3.0/activate/was/wasscanschedule/<id>`

`/qps/rest/3.0/activate/was/wasscanschedule/<filters>`

[POST]

Activate one or more scheduled scans on web applications which are in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Edit WAS Schedule". Scan target must be within the user's scope.

### Input Parameters

The "id" (integer) element and the data to be updated in the schedule are required where "id" identifies a schedule. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: WasScanSchedule](#) for descriptions of all of the <WasScanSchedule> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) The schedule ID. This element is assigned by the service and is required for a certain type of request.
name	(text) The user-defined schedule name (maximum 256 characters).
createdDate	(date) The date when the schedule was created in WAS, in UTC date/time format.

updatedDate (date) The date when the schedule was created in WAS, in UTC date/time format.

type (keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.

webApp.name (text) The name of the web application being scanned.

webApp.id (integer) The ID of the web application being scanned.

owner.id (text) ID associated with the owner who created the schedule.

active (boolean) Indicates whether the schedule is active or not. True indicates active schedule.

invalid (boolean) Indicates the schedule is invalid. The web application to which the schedule was applied is deleted and hence the schedule is invalid.

## Sample - Activate a schedule

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/activate/was/wasscanschedule/1688" < file.xml
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WasScanSchedule>
```

```

    <id>1688</id>
  </WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - Activate Multi Schedule using filters

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/activate/was/wasscanschedul
e" < file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="name"
operator="CONTAINS">Schedule</Criteria>
  </filters>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <data>
    <WasScanSchedule>
      <id>701147</id>
    </WasScanSchedule>
    <WasScanSchedule>
      <id>701946</id>
    </WasScanSchedule>
  </data>
</ServiceResponse>

```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/wasscanschedule.xsd)/qps/xsd/3.0/was/wasscanschedule.xsd

## Deactivate Schedule

/qps/rest/3.0/update/was/wasscanschedule/<id>

/qps/rest/3.0/deactivate/was/wasscanschedule/<id>

/qps/rest/3.0/deactivate/was/wasscanschedule/<filters>

[POST]

Deactivate one or more scheduled scans on web applications which are in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Edit WAS Schedule". Scan target must be within the user's scope.

### Input Parameters

The "id" (integer) element and the data to be updated in the schedule are required where "id" identifies a schedule. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: WasScanSchedule](#) for descriptions of all of the <WasScanSchedule> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) The schedule ID. This element is assigned by the service and is required for a certain type of request.
name	(text) The user-defined schedule name (maximum 256 characters).
createdDate	(date) The date when the schedule was created in WAS, in UTC date/time format.

updatedDate	(date) The date when the schedule was created in WAS, in UTC date/time format.
type	(keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.
webApp.id	(integer) The ID of the web application being scanned.
webApp.name	(text) The name of the web application being scanned.
owner.id	(integer) ID associated with the owner who created the schedule.
active	(boolean) Indicates whether the schedule is active or not. True indicates active schedule.
invalid	(boolean) Indicates the schedule is invalid. The web application to which the schedule was applied is deleted and hence the schedule is invalid.

## Sample - Deactivate a schedule

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @"https://qualysapi.qualys.com/qps/rest/3.0/deactivate/was/wasscanschedule/1688" < file.xml
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <WasScanSchedule>
```

```

    <id>1688</id>
  </WasScanSchedule>
</data>
</ServiceResponse>

```

## Sample - Deactivate Multi Schedule using filters

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/deactivate/was/wasscansched
ule"< file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="name"
operator="CONTAINS">Schedule</Criteria>
  </filters>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <data>
    <WasScanSchedule>
      <id>701147</id>
    </WasScanSchedule>
    <WasScanSchedule>
      <id>701946</id>
    </WasScanSchedule>
  </data>
</ServiceResponse>

```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/wasscanschedule.xsd)/qps/xsd/3.0/was/wasscanschedule.xsd

## Delete Schedule

`/qps/rest/3.0/delete/was/wasscanschedule/<id>`

`/qps/rest/3.0/delete/was/wasscanschedule/<filters>`

[POST]

Delete scheduled scans on web applications which are in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and Delete WAS Schedule". Scan target must be within the user's scope.

### Input Parameters

The "id" (integer) element and the data to be updated in the schedule are required where "id" identifies a schedule. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: WasScanSchedule](#) for descriptions of all of the <WasScanSchedule> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) The schedule ID. This element is assigned by the service and is required for a certain type of request.
name	(text) The user-defined schedule name (maximum 256 characters).
createdDate	(date) The date when the schedule was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the schedule was created in WAS, in UTC date/time format.

type	(keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.
webApp.name	(text) The name of the web application being scanned.
webApp.id	(integer) The ID of the web application being scanned.
owner.id	(integer) ID associated with the owner who created the schedule.
active	(boolean) Indicates whether the schedule is active or not. True indicates active schedule.
invalid	(boolean) Indicates the schedule is invalid. The web application to which the schedule was applied is deleted and hence the schedule is invalid.

## Sample - Delete single schedule

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/wasscanschedule/
1846"
```

Note: "file.xml" contains the request POST data.

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.cm/qps/xsd/3.0
/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <WasScanSchedule>
      <id>1846</id>
    </WasScanSchedule>
```

```
</data>
</ServiceResponse>
```

## Sample - Delete schedules matching criteria

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/wasscanschedule/"
" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="active" operator="EQUALS">>false</Criteria>
    <Criteria field="name" operator="CONTAINS">WEEKLY -</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/wasscanschedule.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <data>
    <WasScanSchedule>
      <id>1747</id>
    </WasScanSchedule>
    <WasScanSchedule>
      <id>1768</id>
    </WasScanSchedule>
  </data>
</ServiceResponse>
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/wasscanschedule.xsd)/qps/xsd/3.0/was/wasscanschedule.xsd

## Download Schedule

/qps/rest/3.0/download/was/wasscanschedule/<id>

/qps/rest/3.0/download/was/wasscanschedule/<filters>

[POST]

Download scheduled scans on a web applications, which are in the user's scope, to iCalendar format and then import them into your favorite calendar application so you can access your schedules on the go. You can import your schedules into several calendars including Microsoft Outlook, Google Calendar and Apple iCal.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The schedule must be within the user's scope.

### Input Parameters

The "id" (integer) element and the data to be updated in the schedule are required where "id" identifies a schedule. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: WasScanSchedule](#) for descriptions of all of the <WasScanSchedule> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) The schedule ID. This element is assigned by the service and is required for a certain type of request.
name	(text) The user-defined schedule name (maximum 256 characters).
createdDate	(date) The date when the schedule was created in WAS, in UTC date/time format.

updatedDate	(date) The date when the schedule was created in WAS, in UTC date/time format.
type	(keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.
webApp.name	(text) The name of the web application being scanned.
webApp.id	(integer) The ID of the web application being scanned.
owner.id	(integer) ID associated with the owner who created the schedule.
active	(boolean) Indicates whether the schedule is active or not. True indicates active schedule.
invalid	(boolean) Indicates the schedule is invalid. The web application to which the schedule was applied is deleted and hence the schedule is invalid.

## Sample - Download a single schedule

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/download/was/wasscanschedule/1846"
```

Note: "file.xml" contains the request POST data.

### XML response

```
BEGIN:VCALENDAR  
PRODID:-//Qualys Inc//WAS Product//EN  
VERSION:2.0  
CALSCALE:GREGORIAN  
METHOD:PUBLISH  
BEGIN:VTIMEZONE  
TZID:America/Boise
```

```
TZURL:http://tzurl.org/zoneinfo/America/Boise
X-LIC-LOCATION:America/Boise
BEGIN:DAYLIGHT
TZOFFSETFROM:-0700
TZOFFSETTO:-0600
TZNAME:MDT
DTSTART:20070311T020000
RRULE:FREQ=YEARLY;BYMONTH=3;BYDAY=2SU
END:DAYLIGHT
BEGIN:STANDARD
TZOFFSETFROM:-0600
TZOFFSETTO:-0700
TZNAME:MST
DTSTART:20071104T020000
RRULE:FREQ=YEARLY;BYMONTH=11;BYDAY=1SU
END:STANDARD
BEGIN:STANDARD
TZOFFSETFROM:-074449
TZOFFSETTO:-0800
TZNAME:PST
DTSTART:18831118T121511
END:STANDARD
BEGIN:DAYLIGHT
...
CREATED:20181128T204534Z
LAST-MODIFIED:20181128T210007Z
SEQUENCE:0
STATUS:CONFIRMED
TRANSP:TRANSPARENT
END:VEVENT
END:VCALENDAR
```

## XSD

<http://<platform API server>/qps/xsd/3.0/was/wasscanschedule.xsd>

## Reference: Schedule

The <WasScanSchedule> element includes sub elements used to define a schedule. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) The schedule ID. This element is assigned by the service and is required for a certain type of request.
name	(text) The user-defined schedule name (maximum 256 characters).
owner.id	(integer) ID associated with the owner who created the schedule.
createdDate	(date) The date when the schedule was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the schedule was created in WAS, in UTC date/time format.
type	(keyword) The scheduled scan type: VULNERABILITY or DISCOVERY.
webApp.name	(text) The name of the web application being scanned.
webApp.id	(integer) The ID of the web application being scanned.
webApp.tags (with operator="NONE")	Tags associated with the web application being scanned.
webApp.tags.id	(integer) ID of the tag applied to the web application being scanned.

invalid	(boolean) Indicates the schedule is invalid. The web application to which the schedule was applied is deleted and hence the schedule is invalid.
lastScan (with operation="NONE")	(boolean) Indicates if the last scan was performed or not. True indicates that the last scan was performed.
lastScan.launchedDate	(date) Date when the last scan was launched on the web application, in UTC date/time format.
lastScan.status	(keyword) Scan status reported by last web application scan: SUBMITTED, RUNNING, FINISHED, TIME_LIMIT_EXCEEDED, SCAN_NOT_LAUNCHED, SCANNER_NOT_AVAILABLE, ERROR, CANCELED)
multi (Boolean)	(boolean) Indicates if the scheduled scan is single scan or multiple scan.

## Reference: WasScanSchedule

The <WasScanSchedule> element includes sub elements used to define a web application scan schedule. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) The schedule ID. This element is assigned by the service and is required for a certain type of request (details, activate, deactivate).
owner	(text)The user who owns the schedule. User properties include user ID, user login, first and last name.  Example: <owner> <id>123056</id> <username>username</username> <firstName><![CDATA[John]]></firstName> <lastName><![CDATA[Smith]]></lastName> </owner>
active (Boolean)	The schedule is active: true or false.
launchedCount (integer)	The number of times the scan has been launched.
nextLaunchDate (date)	The next launch date and time in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).
target* (for single web application)	(text) The target of the scan. <webApp> is the target web application.  <scannerAppliance> - type (keyword) is set to INTERNAL for a scanner appliance, or EXTERNAL for

## Qualys Web Application Scanning API

### Schedules

external scanners or scannerTags for assigning multiple scanner appliances grouped by asset tag. If the type is INTERNAL, friendlyName (text) is the user-defined appliance name.

<cancelOption> set to DEFAULT - Forces the use of the target web app's cancelScans option if set, else fall back to the one passed in to the API with the schedule settings.

<cancelOption> set to SPECIFIC - Always use the cancel scan option passed with the schedule settings.

Example: target.webApp is required

```
<target>
  <webApp>
    <id>324265</id>
    <name><![CDATA[Merchant Site]]></name>
    <url><![CDATA[http://url]]></url>
  </webApp>
  <scannerAppliance>
    <type>INTERNAL</type>
    <friendlyName><![CDATA[name]]></friendlyName>
  </scannerAppliance>
  <cancelOption>SPECIFIC</cancelOption>
</target>
```

target\* (for multiple web application)

<cancelOption> set to DEFAULT - Forces the use of the target web app's cancelScans option if set, else fall back to the one passed in to the API while launching the scan.

<cancelOption> set to SPECIFIC - Always use the cancel scan option passed while launching the scan.

<target.authRecordOption> set to SPECIFIC - Always use the authRecord passed while launching the scan

<target.authRecordOption> set to DEFAULT - Forces the use of the authRecord, if set, else fall back to the one passed in to the API while launching the

scan.

<target.profileOption> set to SPECIFIC-Always use the optionProfile passed while launching the scan

<target.profileOption> set to DEFAULT-Forces the use of the optionProfile if set, else fall back to the one passed in to the API while launching the scan.

<target.scannerOption> set to SPECIFIC-Always use the scanner passed while launching the scan

<target.scannerOption> set to DEFAULT-Forces the use of the scanner if set, else fall back to the one passed in to the API while launching the scan.

<target.randomizeScan> (Boolean) - Set to true to scan the selected web applications in random order. Set to false to scan the selected web application in sequential order.

target.tags (For MultiScan)--

---target.tags.included.option(ALL/ANY) is required,

---target.tags.included.tagList is required, only <set> is allowed for target.tags.included.tagList.

--- target.tags.included.tagList.set.Tag.id is required and should be valid

---Only target.tags.exclusive is not allowed, it must be with target.tags.inclusive

---If target.tags.excluded is present, all the above rules are applicable to it

Example: Either target.webApps or target.tags is required and these are mutually exclusive.

target.webApps (For MultiScan)-

Only <set> is allowed for target.webApps

<webApps>

<set>

```

        <WebApp>
          <id>4330527</id>
        </WebApp>
        <WebApp>
          <id>4330327</id>
        </WebApp>
      </set>
    </webApps>
    target.tags (For MultiScan)-
    <tags>
      <included>
        <option>ALL</option>
        <tagList>
          <set>
            <Tag><id>12017424</id></Tag>
            <Tag><id>12017228</id></Tag>
          </set>
        </tagList>
      </included>
      <excluded>
        <option>ANY</option>
        <tagList>
          <set>
            <Tag><id>12017228</id></Tag>
          </set>
        </tagList>
      </excluded>
    </tags>

```

profile.id

(integer) The name of the option profile that includes scan settings. The service provides the profile “Initial WAS Options” and we recommend this to get started.

Example:

```

<profile>
  <name>Initial WAS Options</name>
</profile>

```

proxy.id

(integer) The proxy for scanning the target web application.

Example:

```

<proxy>
  <id>12345</id>

```

	</proxy>
dnsOverride.id	<p>(integer) The DNS override record for scanning the target web application.</p> <p>Example:  <pre>&lt;dnsOverride&gt;   &lt;id&gt;67890&lt;/id&gt; &lt;/dnsOverride&gt;</pre></p>
createdDate (date)	<p>The schedule creation date and time in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).</p>
createdBy*	<p>The user who created the schedule.</p> <p>Example:  <pre>&lt;createdBy&gt;   &lt;id&gt;123056&lt;/id&gt;   &lt;username&gt;username&lt;/username&gt;   &lt;firstName&gt;&lt;![CDATA[John]]&gt;&lt;/firstName&gt;   &lt;lastName&gt;&lt;![CDATA[Smith]]&gt;&lt;/lastName&gt; &lt;/createdBy&gt;</pre></p>
updatedAt (date)	<p>The date and time of the most recent update of the schedule in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).</p>
updatedAt*	<p>The user who updated the schedule.</p> <p>Example:  <pre>&lt;updatedAt&gt;   &lt;id&gt;123056&lt;/id&gt;   &lt;username&gt;username&lt;/username&gt;   &lt;firstName&gt;&lt;![CDATA[John]]&gt;&lt;/firstName&gt;   &lt;lastName&gt;&lt;![CDATA[Smith]]&gt;&lt;/lastName&gt; &lt;/updatedAt&gt;</pre></p>
scheduling*	<p>The schedule settings. &lt;cancelAfterNHours&gt; is the number of hours after which the scan task will be cancelled. &lt;cancelTime&gt; is the time at which a scan will be cancelled. &lt;startDate&gt; is the date and time the scan will begin. &lt;timeZone&gt; is the time zone that applies to the schedule. &lt;occurrence&gt; defines</p>

frequency of the task: SINGLE, DAILY, WEEKLY or MONTHLY.

Example of weekly scan with the `<cancelAfterNHours>` option:

```
<scheduling>
  <cancelAfterNHours>11</cancelAfterNHours>
  <startDate>2017-02-02T10:10:00Z</startDate>
  <timeZone>
    <code>Europe/Paris</code>
  </timeZone>
  <occurrenceType>WEEKLY</occurrenceType>
  <occurrence>
    <weeklyOccurrence>
      <everyNWeeks>2</everyNWeeks>
      <occurrenceCount>20</occurrenceCount>
      <onDays>
        <WeekDay>MONDAY</WeekDay>
        <WeekDay>SATURDAY</WeekDay>
        <WeekDay>SUNDAY</WeekDay>
      </onDays>
    </weeklyOccurrence>
  </occurrence>
</scheduling>
```

Example of single occurrence scan with the `<cancelTime>` option:

```
<scheduling>
  <startDate>2017-02-02T10:10:00Z</startDate>
  <timeZone>
    <code>Europe/Paris</code>
  </timeZone>
  <occurrenceType>ONCE</occurrenceType>
  <occurrence>
    <cancelTime>11:15</cancelTime>
  </occurrence>
</scheduling>
```

notification\*

The notification settings.

- `<active>` indicates whether notification is enabled.

## Qualys Web Application Scanning API

### Schedules

- <delay> indicates when the notification will be sent as number of days, hours, or minutes before the scan.

- <scale> indicates the delay unit: DAY, HOUR or MINUTE.

- <fromAddressOption> identifies the sender of the notification. The valid values for the tag are: QUALYS\_SUPPORT and OWNER. OWNER means the user whose account is used to create the schedule. If you do not specify this tag, then by default the QUALYS\_SUPPORT value is sent in the request for this tag.

```
<fromAddressOption>QUALYS_SUPPORT
</fromAddressOption>
<fromAddressOption>OWNER</fromAddressOption>
```

- <recipients> identifies the email addresses of the notification recipients. <message> is the text of the notification message.

Example:

```
<notification>
  <active>true</active>
  <delay>
    <nb>1</nb>
    <scale>DAY</scale>
  </delay>
  <fromAddressOption>OWNER</fromAddressOption>
  <recipients>
    <set>
      <EmailAddress><![CDATA[1@a.com]]></EmailAddress>
      <EmailAddress><![CDATA[2@a.com]]></EmailAddress>
    </set>
  </recipients>
  <message><![CDATA[The message]]></message>
</notification>
```

sendMail

(boolean) Set to false to disable scan complete email notifications.

```
Example:<sendMail>>false</sendMail>
```

sendOneMail

(boolean) Set to true to send one email upon multi-scan completion. Set to false to send one email upon completion of each individual scan.

```
Example:<sendOneMail>>true</sendOneMail>
```

Note: sendOneMail is valid only when sendMail = true for a multi-scan (multiple web applications being scanned). If sendMail is set to false, sendOneMail will be ignored.

sendMailFromAddressOption

Identifies the sender of the scan complete notifications. The valid values are: QUALYS\_SUPPORT and OWNER. OWNER means the user whose account is used to create the schedule.

```
Example:<sendMailFromAddressOption>QUALYS_
SUPPORT</sendMailFromAddressOption>
```

```
Example:<sendMailFromAddressOption>OWNER
</sendMailFromAddressOption>
```

To set this parameter, the sendMail parameter must be set to true. If the sendMail parameter is true, then sendMailFromAddressOption is by default set to QUALYS\_SUPPORT. You can change the value of the parameter to OWNER.

# Reports

## Report Count

/qps/rest/3.0/count/was/report

[GET] [POST]

Returns the total number of reports in the user's scope.

Permissions required User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes reports in the user's scope.

## Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: Report](#) for descriptions of these <Report> elements

[Click here for available operators](#)

Parameter	Description
id	(integer) The report ID. This element is assigned by the service and is required for a certain type of request (details, status, update, delete, send or download).
name	(text) A report name (maximum 256 characters). Applies to all reports.
tags.id	(integer) ID of the tag associated with the report.
tags.name	(text) Name of the tag associated with the report.
creationDate	(date) The date when the report was created in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).

type	(keyword) The report type, one of: WAS_SCAN_REPORT, WAS_WEBAPP_REPORT, WAS_SCORECARD_REPORT, WAS_CATALOG_REPORT, DATALIST_REPORT.
format	(keyword) The format of the report, one of: HTML_ZIPPED, HTML_BASE64, PDF, PDF_ENCRYPTED, POWERPOINT, CSV, CSV_V2, XML, WORD.
status	(keyword) The status of the report: RUNNING, ERROR or COMPLETE.

### Sample - Get count of reports in user's account

Return the number (count) of all reports in the user's scope.

#### API request

```
curl -u "USERNAME:PASSWORD"  
https://qualysapi.qualys.com/qps/rest/3.0/count/was/report"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/report.xsd"  
<ServiceResponse>  
  <count>12</count>  
  <responseCode>SUCCESS</responseCode>  
</ServiceResponse>
```

### Sample - Get count of reports with a criteria

Return the number (count) reports with an ID that includes 1302 and 1303.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-
```

```
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/report" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="id" operator="IN">1302, 1303</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/report.xsd"
<ServiceResponse>
  <count>1</count>
  <responseCode>SUCCESS</responseCode>
</ServiceResponse>
```

### XSD

[<platform API server>/qps/xsd/3.0/was/report.xsd](#)

## Search Report

/qps/rest/3.0/search/was/report

[POST]

Returns a list of reports which are in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes reports in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: Report](#) for descriptions of these <Report> elements

[Click here for available operators](#)

Parameter	Description
id	(integer) The report ID. This element is assigned by the service and is required for a certain type of request (details, status, update, delete, send or download).
name	(text) A report name (maximum 256 characters). Applies to all reports.
tags.id	(integer) ID of the tag associated with the report.
tags.name	(text) Name of the tag associated with the report.
creationDate	(date) The date when the report was created in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).
type	(keyword) The report type, one of: WAS_SCAN_REPORT, WAS_WEBAPP_REPORT,

WAS\_SCORECARD\_REPORT,  
WAS\_CATALOG\_REPORT, DATALIST\_REPORT.

format	(keyword) The format of the report, one of: HTML_ZIPPED, HTML_BASE64, PDF, PDF_ENCRYPTED, POWERPOINT, CSV, CSV_V2, XML, WORD.
status	(keyword) The status of the report: RUNNING, ERROR or COMPLETE.

### Sample - Search reports (no criteria)

Let us view a list of all reports in the user's scope.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" "https://qualysapi.qualys.com/qps/rest/3.0/search/was/report"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd"
<ServiceResponse>
  <count>3</count>
  <data>
    <list>
      <Report>
        <id>1393</id>
        <name><![CDATA[Web Application Report 1]]></name>
        <type>WAS_WEBAPP_REPORT</type>
        <format>PDF</format>
        <status>COMPLETE</status>
        <size>2244667</size>
        <creationDate>2017-11-25T10:20:06Z</creationDate>
        <tags>
          <count>0</count>
        </tags>
        <owner>
          <id>123056</id>
```

```
<username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</owner>
</Report>
<Report>
  <id>1394</id>
  <name><![CDATA[Web Application Report 2]]></name>
  <type>WAS_WEBAPP_REPORT</type>
  <format>PDF</format>
  <status>COMPLETE</status>
  <size>124578</size>
  <creationDate>2017-11-25T10:21:25Z</creationDate>
  <tags>
    <count>0</count>
  </tags>
  <owner>
    <id>123056</id>
    <username>username</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </owner>
</Report>
<Report>
  <id>1282</id>
  <name><![CDATA[Web Application Report 3]]></name>
  <type>WAS_WEBAPP_REPORT</type>
  <format>PDF</format>
  <status>COMPLETE</status>
  <size>12341234</size>
  <creationDate>2017-11-24T00:00:00Z</creationDate>
  <tags>
    <count>0</count>
  </tags>
  <owner>
    <id>123056</id>
    <username>username</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Smith]]></lastName>
  </owner>
</Report>
</list>
</data>
<isDone>>true</isDone>
<responseCode>SUCCESS</responseCode>
```

```
<responseErrorDetails>
  <internalErrorCodeId>0</internalErrorCodeId>
</responseErrorDetails>
</ServiceResponse>
```

## Sample - Search for a particular report

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/report" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="tags.id" operator="EQUALS">99511</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/report.xsd"
<ServiceResponse>
  <count>1</count>
  <data>
    <list>
      <Report>
        <id>1302</id>
        <name><![CDATA[Web Application Report 2]]></name>
        <type>WAS_WEBAPP_REPORT</type>
        <format>PDF_ENCRYPTED</format>
        <status>COMPLETE</status>
        <size>2244667</size>
        <creationDate>2017-11-24T00:00:00Z</creationDate>
        <tags>
          <count>1</count>
        </tags>
        <distributionList>
```

```
<count>12</count>
</distributionList>
<owner>
  <id>123056</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</owner>
</Report>
</list>
</data>
<isDone>true</isDone>
<responseCode>SUCCESS</responseCode>
<responseErrorDetails>
  <internalErrorCodeId>0</internalErrorCodeId>
</responseErrorDetails>
</ServiceResponse>
```

## XSD

[platform API server](platform API server/qps/xsd/3.0/was/report.xsd)/qps/xsd/3.0/was/report.xsd

## Get Report Details

/qps/rest/3.0/get/was/report/<id>

[GET]

View details for a report which is in the user's scope. Want to find a report ID to use as input? See [Search reports](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes reports in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the report.

[Click here for available operators](#)

### Sample - View details of a report

Let us view details for a report with ID 1302.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/report/1302"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/report.xsd"  
<ServiceResponse>  
  <count>1</count>  
  <data>  
    <Report>  
      <id>1302</id>  
      <name><![CDATA[Web Application Report 2]]></name>  
      <type>WAS_WEBAPP_REPORT</type>
```

```

<format>PDF_ENCRYPTED</format>
<status>COMPLETE</status>
<size>2244667</size>
<creationDate>2018-11-24T00:00:00Z</creationDate>
<lastDownloadDate>2018-11-09T00:00:00Z</lastDownloadDate>
<downloadCount>1</downloadCount>
<tags>
  <count>2</count>
  <list>
    <Tag>
      <id>99509</id>
      <name><![CDATA[Tag 1]]></name>
    </Tag>
    <Tag>
      <id>99510</id>
      <name><![CDATA[Tag 2]]></name>
    </Tag>
  </list>
</tags>
<distributionList>
  <count>2</count>
  <list>
<EmailAddress><![CDATA[email1@company.com]]></EmailAddress>
<EmailAddress><![CDATA[email2@company.com]]></EmailAddress>
  </list>
</distributionList>
<owner>
  <id>123056</id>
  <username>username</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</owner>
</Report>
</data>
<responseCode>SUCCESS</responseCode>
</ServiceResponse>

```

## XSD

[platform API server](#)/qps/xsd/3.0/was/report.xsd

## Get Report Status

/qps/rest/3.0/status/was/report/<id>

[GET]

Retrieve the status of a report which is in the user's scope. Want to find a report ID to use as input? See [Search reports](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes reports in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the report.

[Click here for available operators](#)

### Sample - Get report status of a particular report

Let us view details for report with ID 1302.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/status/was/report/1302"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/report.xsd"  
<ServiceResponse>  
  <count>1</count>  
  <data>  
    <Report>  
      <id>1302</id>  
      <status>COMPLETE</status>  
    </Report>
```

```
</data>  
<responseCode>SUCCESS</responseCode>  
</ServiceResponse>
```

## XSD

[<platform API server>](#)/qps/xsd/3.0/was/report.xsd

## Download Report

/qps/rest/3.0/download/was/report/<id>

[GET]

Download a report which is in the user's scope. Want to find a report ID to use as input? See [Search reports](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes reports in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies the report.

[Click here for available operators](#)

### Sample - Download a report

Let us view download a report with ID 1302.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/download/was/report/1302"
```

#### XML response

Report ID 1302 will be downloaded in the format in which it was generated.

#### XSD

[<platform API server>/qps/xsd/3.0/was/report.xsd](#)

## Send Encrypted PDF Report

/qps/rest/3.0/send/was/report/<id>

[POST]

Send an encrypted PDF report, which is in the user's scope, to a distribution list.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Distribute Report" permission. The output includes reports in the user's scope.

### Input Parameters

The elements "id" (integer) and "distributionList" (text) are required, where "id" identifies a report and "distributionList" identifies the email addresses of the report recipients.

[Click here for available operators](#)

### Sample - Send Encrypted PDF Report

Let us send an encrypted PDF report to a distribution list.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
@data-binary  
"https://qualysapi.qualys.com/qps/rest/3.0/send/was/report/1302" <  
file.xml
```

Note: "file.xml" contains the request POST data.

#### Request POST data

```
<ServiceRequest>  
  <data>  
    <Report>  
    <distributionList>  
    <add>  
      <EmailAddress><![CDATA[email1@abc.com]]></EmailAddress>
```

```
<EmailAddress><![CDATA[email2@abc.com]]></EmailAddress>
</add>
</distributionList>
</Report>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd"
<ServiceResponse>
  <count>1</count>
  <data>
    <Report>
      <id>1302</id>
    </Report>
  </data>
  <responseCode>SUCCESS</responseCode>
</ServiceResponse>
```

## XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd)/qps/xsd/3.0/was/report.xsd

## Update Report

/qps/rest/3.0/update/was/report/<id>

[POST]

Update the tags assigned to a report which is in the user's scope. Want to find a report ID to use as input? See [Search reports](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Edit Report" permission. The output includes reports in the user's scope.

### Input Parameters

The elements "id" (integer) and "tags" (complex element) are required, where "id" identifies a report and "tags" identifies tags to be added or removed.

The element "showPatched" can be set to filter the report to include/not include findings with virtual patches. Applies to Web Application Report and Scan Report. This filter can be set to:

SHOW\_ONLY - show patched findings only

SHOW\_BOTH - show patched & unpatched findings (default)

SHOW\_NONE - show unpatched findings only

[Click here for available operators](#)

### Sample - Update a report - add a tag

Let us update the a report with ID 1304 by tagging the report.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/report/1304" <  
file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<ServiceRequest>
  <data>
    <Report>
      <tags>
        <set>
          <Tag>
            <id>99509</id>
          </Tag>
          <Tag>
            <id>99510</id>
          </Tag>
        </set>
      </tags>
    </Report>
  </data>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd"
<ServiceResponse>
  <count>1</count>
  <data>
    <Report>
      <id>1304</id>
    </Report>
  </data>
  <responseCode>SUCCESS</responseCode>
</ServiceResponse>
```

**XSD**

[platform API server](https://platform-api-server/qps/xsd/3.0/was/report.xsd)/qps/xsd/3.0/was/report.xsd

## Delete Report

/qps/rest/3.0/delete/was/report/<id>

/qps/rest/3.0/delete/was/report

[POST]

Delete a report which is in the user's scope. Want to find a report ID to use as input? See [Search reports](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Delete Report" permission. The output includes reports in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. To delete one report by the report ID, the id element is required. The other elements listed below are used to delete reports based on filters. See [Reference: Report](#) for descriptions of these <Report> elements.

[Click here for available operators](#)

Parameter	Description
id	(integer) The report ID. This element is assigned by the service and is required for a certain type of request (details, status, update, delete, send or download).
name	(text) A report name (maximum 256 characters). Applies to all reports.
tags.id	(integer) ID of the tag associated with the report.
tags.name	(text) Name of the tag associated with the report.
creationDate	(date) The date when the report was created in UTC

	date/time format (YYYY-MM-DDTHH:MM:SSZ).
type	(keyword) The report type, one of: WAS_SCAN_REPORT, WAS_WEBAPP_REPORT, WAS_SCORECARD_REPORT, WAS_CATALOG_REPORT, DATALIST_REPORT.
format	(keyword) The format of the report, one of: HTML_ZIPPED, HTML_BASE64, PDF, PDF_ENCRYPTED, POWERPOINT, CSV, XML, WORD.
status	(keyword) The status of the report: RUNNING, ERROR or COMPLETE.

### Sample - Delete a single report

Let us delete report with the ID 6333.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/report/6333"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>6333</id>
    </Report>
  </data>
```

### Sample - Delete reports - criteria

Let us delete reports matching one or both of these criteria: 1) reports with names that contain the string “to be deleted”, and 2) reports that are completed (having the status COMPLETED).

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/report" <  
file.xml
```

Note: “file.xml” contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="name" operator="CONTAINS">to be  
deleted</Criteria>  
    <Criteria field="status" operator="EQUALS">COMPLETE</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/report.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Report>  
      <id>1542</id>  
    </Report>  
  </data>  
</ServiceResponse>
```

### XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd)/qps/xsd/3.0/was/report.xsd

# Report Creation

## Create Report

`/qps/rest/3.0/create/was/report`

[POST]

Using the Report Creation API you can create different types of report: [Web Application Report](#), [Scan Report](#), [Scorecard Report](#), [Catalog Report](#).

**Note:** You can generate a report without the template ID or display and filter information. In such a case, we will use the default template based on the type of the report to generate the report.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission “API Access” and “Create Report”.

## XSD

<platform API server>/qps/xsd/3.0/was/report.xsd

## Web Application Report

/qps/rest/3.0/create/was/report

[POST]

Using the Report Creation API you can create the Web Application Report.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission “API Access” and “Create Report”.

Note: Report creation may sometimes fail if the report is created for large number of web applications. To avoid such failures, we have now categorized report creation as per the number of web applications being included in the report. For web applications less than or equal to 500, you can create the report. But if the number of web applications exceeds 500, report cannot be created and error message is displayed in such cases.

The categorization is as follows:

Number of Web Applications	Create Report (API)
Less than or equal to 500	Yes
More than 500	No

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
name	(text) Name of the report.

Note: Generating a report without template will allow you to assign a name to the report. If you use template during report generation, the name you provide in the request is ignored and the template name is assigned to the report.

**type** (keyword) Type of the report, one of:  
WAS\_SCAN\_REPORT, WAS\_WEBAPP\_REPORT,  
WAS\_SCORECARD\_REPORT, WAS\_CATALOG\_REPORT

**format** (keyword) Report format, one of: WORD, HTML\_ZIPPED,  
HTML\_BASE64, PDF, PDF\_ENCRYPTED, CSV, CSV\_V2,  
XML, POWERPOINT

**template.id** (integer) The template ID. This element is assigned by the system and is required for a certain type of request.

**config\*(1)** The “config” element must have one and only one of these child elements: webAppReport, scanReport, catalogReport or scorecardReport. Refer to [Reference: Report](#) for more details.

**tags.id** (integer) ID of the tag associated with the web application.

**tags.name** (text) Name of the tag associated with the web application.

**password** (text) The password for a PDF encrypted report.

**distributionList\*** This element specifies the email addresses for distribution of the report.

Example:

```
<distributionList>
  <count>2</count>
  <list>
    <EmailAddress><![CDATA[1@abc.com]]></EmailAddress>
    <EmailAddress><![CDATA[2@abc.com]]></EmailAddress>
  </list>
</distributionList>
```

## Sample - Create web app report - minimum criteria

Let us create a web application report in encrypted PDF format, setting both tags and web applications for the target.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <Report>  
      <name><![CDATA[API Web Application Report]]></name>  
      <description><![CDATA[PDF WebApp report]]></description>  
      <format>PDF</format>  
      <type>WAS_WEBAPP_REPORT</type>  
      <config>  
        <webAppReport>  
          <target>  
            <webapps>  
              <WebApp><id>8223303</id></WebApp>  
            </webapps>  
          </target>  
        </webAppReport>  
      </config>  
    </Report>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/report.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Report>
```

```
        <id>1085046</id>
      </Report>
    </data>
  </ServiceResponse>
```

## Sample - Create a web application report - use tags as target

Let us create a web application report using tags to add web applications as target for the report.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <Report>
      <name><![CDATA[Web App Report]]></name>
      <format>PDF</format>
      <type>WAS_WEBAPP_REPORT</type>
      <config>
        <webAppReport>
          <target>
            <tags>
              <included>
                <option>ALL</option>
                <tagList>
                  <Tag>
                    <id>12008216</id>
                  </Tag>
                </tagList>
              </included>
              <excluded>
                <option>ANY</option>
                <tagList>
                  <Tag>
                    <id>12008219</id>
                  </Tag>
                </tagList>
              </excluded>
            </tags>
          </target>
        </webAppReport>
      </config>
    </Report>
  </data>
</ServiceRequest>
```

```
</tagList>
    </excluded>
  </tags>
</target>
</webAppReport>
</config>
</Report>
</data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/
was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report><id>981654</id>
  </Report>
  </data>
</ServiceResponse>
```

### Sample - Create a web application report using report template

Let's generate a web application report in PDF format using a specific template (identified by its template ID).

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report/" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <Report>
      <name>Web_App_Report</name>
```

```

    <description><![CDATA[A web application
report]]></description>
    <type>WAS_WEBAPP_REPORT</type>
    <format>PDF</format>
    <config>
      <webAppReport>
        <target>
          <tags>
            <included>
              <option>ALL</option>
              <tagList>
                <Tag>
                  <id>12001856</id>
                </Tag>
              </tagList>
            </included>
            <excluded>
              <option>ANY</option>
              <tagList>
                <Tag>
                  <id>12001856</id>
                </Tag>
              </tagList>
            </excluded>
          </tags>
        </target>
      </webAppReport>
    </config>
    <template>
      <id>876048</id>
    </template>
  </Report>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/
was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>

```

```
<Report>
  <id>973056</id>
</Report>
</data>
</ServiceResponse>
```

## Sample - Create a web application report using CSV\_V2 format

Let's generate a web application report in CSV\_V2 format.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report/" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <Report>
      <name><![CDATA[Web Application Report for Servers]]></name>
      <format>CSV_V2</format>
      <template>
        <id>46440</id>
      </template>
      <config>
        <webAppReport>
          <target>
            <webapps>
              <WebApp>
                <id>470281</id>
              </WebApp>
            </webapps>
          </target>
        </webAppReport>
      </config>
    </Report>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>214158</id>
    </Report>
  </data>
</ServiceResponse>
```

## XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd)/qps/xsd/3.0/was/report.xsd

## Scan Report

/qps/rest/3.0/create/was/report

[POST]

Using the Report Creation API you can create the Scan Report. A scan report shows you the results of scans on a particular web application.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission “API Access” and “Create Report”.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. The element “target” is required and at least one “scans” child element is required. For details, refer to [Reference: Report Creation](#).

[Click here for available operators](#)

Parameter	Description
target.scans	(WasScan) The web applications to be scanned.
filters.searchlists	(SearchList) Number of search lists to report on vulnerabilities in those lists. If no search lists are selected, the report will include all findings.
filters.url	(text) Number of URLs of the web applications to being scanned.
filters.status	(ScanFindingStatus) Select status of vulnerabilities to be included in this report: New, Active, Re-opened, Fixed, Protected.

filters.remediation.showPatched	(keyword) Specify the filter to include ignored or patched findings (vulnerabilities and sensitive content) in this report. Show patched filter: SHOW_ONLY, SHOW_NONE, SHOW_BOTH - default.
filters.remediation.ignoredReasons	(keyword) The reason to ignore a finding: FALSE_POSITIVE, RISK_ACCEPTED, NOT_APPLICABLE.
display.contents	(ScanAppReportContent) The report content: Description, Summary, Results, Individual Records, Details, AllResults, Appendix, Severity Levels.
display.graphs	(ScanAppReportGraph) The graphs to be included in the report: Vulnerabilities by severity, Vulnerabilities by status, Vulnerabilities by group, Sensitive contents by group, Vulnerabilities by OWASP, Vulnerabilities by WASC, Most vulnerable URLs.
display.groups	(ScanAppReportGroup) The group category to be included in the report: URL, OWASP, WASC, State, Category, QID, Group.
display.options	(rawLevels) (Urgent), 4 (Critical), 3 (Serious), 2 (Medium), 1 (Minimal)
filters.remediation.showIgnored	(boolean) Specify if you wish to include ignored or patched findings.
format	(keyword) Report format, one of: WORD, HTML_ZIPPED, HTML_BASE64, PDF,

PDF\_ENCRYPTED, CSV, CSV\_V2,  
XML, POWERPOINT

## Sample - Create a scan report

Let us create a scan report in HTML ZIPPED format, selecting a single scan for the target.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <Report>  
      <name><![CDATA[with all parameters HTML_ZIPPED]]></name>  
      <description><![CDATA[A simple scan report]]></description>  
      <format>HTML_ZIPPED</format>  
      <type>WAS_SCAN_REPORT</type>  
      <config>  
        <scanReport>  
          <target>  
            <scans>  
              <WasScan>  
                <id>104268</id>  
              </WasScan>  
            </scans>  
          </target>  
          <display>  
            <contents>  
              <ScanReportContent>DESCRIPTION</ScanReportContent>  
              <ScanReportContent>SUMMARY</ScanReportContent>  
              <ScanReportContent>GRAPHS</ScanReportContent>  
              <ScanReportContent>RESULTS</ScanReportContent>  
            <ScanReportContent>INDIVIDUAL_RECORDS</ScanReportContent>  
            <ScanReportContent>RECORD_DETAILS</ScanReportContent>  
            <ScanReportContent>ALL_RESULTS</ScanReportContent>
```

```

        <ScanReportContent>APPENDIX</ScanReportContent>
    </contents>
    <graphs>
        <ScanReportGraph>VULNERABILITIES_BY_SEVERITY</ScanReport
Graph>
        <ScanReportGraph>VULNERABILITIES_BY_GROUP</ScanReportGra
ph>
        <ScanReportGraph>VULNERABILITIES_BY_OWASP</ScanReportGra
ph>
        <ScanReportGraph>VULNERABILITIES_BY_WASC</ScanReportGrap
h>
        <ScanReportGraph>SENSITIVE_CONTENTS_BY_GROUP</ScanReport
Graph>
    </graphs>
    <groups>
        <ScanReportGroup>URL</ScanReportGroup>
        <ScanReportGroup>GROUP</ScanReportGroup>
        <ScanReportGroup>OWASP</ScanReportGroup>
        <ScanReportGroup>WASC</ScanReportGroup>
        <ScanReportGroup>STATUS</ScanReportGroup>
        <ScanReportGroup>CATEGORY</ScanReportGroup>
        <ScanReportGroup>QID</ScanReportGroup>
    </groups>
    <options>
        <rawLevels>>true</rawLevels>
    </options>
</display>
<filters>
    <searchlists>
        <SearchList>
            <id>43147</id>
        </SearchList>
    </searchlists>
    <url>http://www.mysite.com/help.html</url>
    <status>
        <ScanFindingStatus>NEW</ScanFindingStatus>
        <ScanFindingStatus>ACTIVE</ScanFindingStatus>
        <ScanFindingStatus>REOPENED</ScanFindingStatus>
        <ScanFindingStatus>FIXED</ScanFindingStatus>
    </status>
</filters>
</scanReport>
</config>
</Report>
</data>

```

```
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/report.xsd">  
<responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Report>  
      <id>3629</id>  
    </Report>  
  </data>  
</ServiceResponse>
```

### Sample - Create a scan report with remediation filter options

Let us create a scan report with remediation filter options to either include ignored findings.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <Report>  
      <name><![CDATA[with all parameters HTML_ZIPPED]]></name>  
      <description><![CDATA[A scan report with ignored  
findings]]></description>  
      <format>HTML_ZIPPED</format>  
      <type>WAS_SCAN_REPORT</type>  
      <config>  
        <scanReport>  
          <target>  
            <scans>  
              <WasScan>
```

```

        <id>104268</id>
      </WasScan>
    </scans>
  </target>
  <display>
    <contents>
      <ScanReportContent>DESCRIPTION</ScanReportContent>
      <ScanReportContent>SUMMARY</ScanReportContent>
      <ScanReportContent>GRAPHS</ScanReportContent>
      <ScanReportContent>RESULTS</ScanReportContent>
      <ScanReportContent>INDIVIDUAL_RECORDS</ScanReportContent>
      <ScanReportContent>RECORD_DETAILS</ScanReportContent>
      <ScanReportContent>ALL_RESULTS</ScanReportContent>
      <ScanReportContent>APPENDIX</ScanReportContent>
    </contents>
    <graphs>
      <ScanReportGraph>VULNERABILITIES_BY_SEVERITY</ScanReport
Graph>
      <ScanReportGraph>VULNERABILITIES_BY_GROUP</ScanReportGra
ph>
      <ScanReportGraph>VULNERABILITIES_BY_OWASP</ScanReportGra
ph>
      <ScanReportGraph>VULNERABILITIES_BY_WASC</ScanReportGrap
h>
      <ScanReportGraph>SENSITIVE_CONTENTS_BY_GROUP</ScanReport
Graph>
    </graphs>
    <groups>
      <ScanReportGroup>URL</ScanReportGroup>
      <ScanReportGroup>GROUP</ScanReportGroup>
      <ScanReportGroup>OWASP</ScanReportGroup>
      <ScanReportGroup>WASC</ScanReportGroup>
      <ScanReportGroup>STATUS</ScanReportGroup>
      <ScanReportGroup>CATEGORY</ScanReportGroup>
      <ScanReportGroup>QID</ScanReportGroup>
    </groups>
    <options>
      <rawLevels>>true</rawLevels>
    </options>
  </display>
  <filters>
    <searchlists>
      <SearchList>
        <id>43147</id>
      </SearchList>

```

```

</searchlists>
<url>http://www.mysite.com/help.html</url>
<remediation>
  <showIgnored>SHOW_BOTH</showIgnored>
  <ignoredReasons>
    <IgnoredReason>FALSE_POSITIVE</IgnoredReason>
    <IgnoredReason>RISK_ACCEPTED</IgnoredReason>
    <IgnoredReason>NOT_APPLICABLE</IgnoredReason>
  </ignoredReasons>
</remediation>
</filters>
</scanReport>
</config>
</Report>
</data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>202447</id>
    </Report>
  </data>
</ServiceResponse>

```

### Sample - Create a scan report using report template

Let's generate a scan report in PDF format using a specific template (identified by its template ID).

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report/" <
file.xml

```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <Report>
      <name><![CDATA[Scan Report for Servers]]></name>
      <format>PDF</format>
      <template>
        <id>876049</id>
      </template>
      <config>
        <scanReport>
          <target>
            <scans>
              <WasScan>
                <id>2252466</id>
              </WasScan>
            </scans>
          </target>
        </scanReport>
      </config>
    </Report>
  </data>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/
was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>973057</id>
    </Report>
  </data>
</ServiceResponse>
```

**Sample - Create a scan report in CSV\_V2 format**

Let's generate a scan report in CSV-V2 format.

**API request**

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report/" <
file.xml
```

Note: "file.xml" contains the request POST data.

**Request POST data**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <Report>
      <name><![CDATA[Scan Report for Servers]]></name>
      <format>CSV_V2</format>
      <template>
        <id>46441</id>
      </template>
      <config>
        <scanReport>
          <target>
            <scans>
              <WasScan>
                <id>1667002</id>
              </WasScan>
            </scans>
          </target>
        </scanReport>
      </config>
    </Report>
  </data>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>214159</id>
    </Report>
```

```
</data>  
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server/qps/xsd/3.0/was/report.xsd)/qps/xsd/3.0/was/report.xsd

## Scorecard Report

/qps/rest/3.0/create/was/report

[POST]

Using the Report Creation API you can create the Scorecard Report. A Scorecard Report ranks the vulnerability of your web applications.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission “API Access” and “Create Report”.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. For details, refer to [Reference: Report Creation](#).

[Click here for available operators](#)

Parameter	Description
target.webapps	(WebApp) The web applications to be scanned.
target.tags.included.option	(keyword: ALL or ANY) Decides which web applications should be included in the scan.  ALL : Only the web applications associated with all the specified tags are included in the scan.  ANY : Only the web applications associated with any of the specified tags included in the scan.
target.tags.included.tagList.Tag.id	(integer) The web applications

	associated with the tag (identified by the specified tag ID) are included in the scan.
filters.searchlists	(SearchList) Number of search lists to report on vulnerabilities in those lists. If no search lists are selected, the report will include all findings.
filters.scanDate	(DatetimeRange) Filter by Scan date.
filters.scanStatus	(WasScanConsolidatedStatus) Filter by scan status.
filters.scanAuthStatus	(WasScanAuthStatus) Filter by authentication status of the scan.
format	(keyword) Report format, one of: WORD, HTML_ZIPPED, HTML_BASE64, PDF, PDF_ENCRYPTED, CSV, CSV_V2, XML, POWERPOINT
display.contents	(ScanAppReportContent) The report content: Description, Summary, Results, Individual Records, Details, AllResults, Appendix, Severity Levels.
target.tags.excluded.option	(Keyword) Value is ALL or ANY
target.tags.excluded.option	(keyword: ALL or ANY) Decides which web applications should be excluded from the scan.  ALL : Only the web applications associated with all the specified tags are excluded from the scan.  ANY : Only the web applications associated with any of the specified tags are excluded from the scan.

target.tags.excluded.tagList.Tag.id (integer) The web applications associated with the tag (identified by the specified tag ID) are excluded from the scan.

display.graphs (ScanAppReportGraph) The graphs to be included in the report: Vulnerabilities by severity, Vulnerabilities by status, Vulnerabilities by group, Sensitive contents by group, Vulnerabilities by OWASP, Vulnerabilities by WASC, Most vulnerable URLs.

display.groups (ScanAppReportGroup) The group category to be included in the report: URL, OWASP, WASC, State, Category, QID, Group.

display.options (rawLevels) (Urgent), 4 (Critical), 3 (Serious), 2 (Medium), 1 (Minimal)

## Sample - Create a scorecard report

Let us create a scorecard report in PDF format, selecting a single tag for the target.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @"-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <Report>  
      <name><![CDATA[with all parameters PDF with rawLevel  
false]]></name>
```

```

<description><![CDATA[A simple scorecard report]]></description>
<format>PDF</format>
<type>WAS_SCORECARD_REPORT</type>
<config>
  <scorecardReport>
    <target>
      <tags>
        <included>
          <option>ALL</option>
          <tagList>
            <Tag>
              <id>7821676</id>
            </Tag>
          </tagList>
        </included>
      </tags>
    </target>
    <display>
      <contents>
        <ScorecardReportContent>DESCRIPTION</ScorecardReportCont
ent>
        <ScorecardReportContent>SUMMARY</ScorecardReportContent>
        <ScorecardReportContent>GRAPHS</ScorecardReportContent>
        <ScorecardReportContent>RESULTS</ScorecardReportContent>
      </contents>
      <graphs>
        <ScorecardReportGraph>VULNERABILITIES_BY_GROUP</ScorecardRepo
rtGraph>
        <ScorecardReportGraph>VULNERABILITIES_BY_OWASP</ScorecardRepo
rtGraph>
        <ScorecardReportGraph>VULNERABILITIES_BY_WASC</ScorecardRepor
tGraph>
      </graphs>
      <groups>
        <scorecardReportGroup>GROUP</ScorecardReportGroup>
        <ScorecardReportGroup>OWASP</ScorecardReportGroup>
        <ScorecardReportGroup>WASC</ScorecardReportGroup>
      </groups>
      <options>
        <rawLevels>>false</rawLevels>
      </options>
    </display>
    <filters>
      <searchlists>
        <SearchList>

```

```
        <id>43147</id>
      </SearchList>
    <SearchList>
      <id>43147</id>
    </SearchList>
  </searchlists>
  <scanDate>
    <startDate>2017-08-28</startDate>
    <endDate>2017-10-28</endDate>
  </scanDate>
  <scanStatus>NO_HOST_ALIVE</scanStatus>
  <scanAuthStatus>NONE</scanAuthStatus>
</filters>
</scorecardReport>
</config>
</Report>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd">
<responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>4629</id>
    </Report>
  </data>
</ServiceResponse>
```

## Sample - Create a scorecard report using the report template

Let's generate a scorecard report in HTML format using a specific template (identified by its template ID).

## API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <Report>
      <name>Report_08</name>
      <description><![CDATA[A scorecard report]]></description>
      <type>WAS_SCORECARD_REPORT</type>
      <format>HTML_ZIPPED</format>
      <template>
        <id>876051</id>
      </template>
      <config>
        <scorecardReport>
          <target>
            <tags>
              <included>
                <option>ALL</option>
                <tagList>
                  <Tag>
                    <id>11999629</id>
                  </Tag>
                </tagList>
              </included>
              <excluded>
                <option>ANY</option>
                <tagList>
                  <Tag>
                    <id>11999629</id>
                  </Tag>
                </tagList>
              </excluded>
            </tags>
          </target>
        </scorecardReport>
      </config>
    </Report>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/
was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>973058</id>
    </Report>
  </data>
</ServiceResponse>
```

## XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd)/qps/xsd/3.0/was/report.xsd

## Catalog Report

/qps/rest/3.0/create/was/report

[POST]

Using the Report Creation API you can create the Catalog Report. A Catalog Report shows you the number and status of entries in your web application catalog.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission “API Access” and “Create Report”.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. The element “target” is required and at least one “scans” child element is required. For details, refer to [Reference: Report Creation](#).

[Click here for available operators](#)

Parameter	Description
filters.scanDate	(DatetimeRange) Filter by scan date.
filters.url	(text) Filter by web app URL.
filters.ip	(text) Filter by IP address.
filters.os	(text) Filter by OS.
filters.status	(EntryStatus) Filter by status.
format	(keyword) Report format, one of: WORD, HTML_ZIPPED, HTML_BASE64, PDF, PDF_ENCRYPTED, CSV, CSV_V2, XML, POWERPOINT

display.contents	(ScanAppReportContent) The report content: Description, Summary, Results, Individual Records, Details, AllResults, Appendix, Severity Levels.
display.graphs	(ScanAppReportGraph) The graphs to be included in the report: Vulnerabilities by severity, Vulnerabilities by status, Vulnerabilities by group, Sensitive contents by group, Vulnerabilities by OWASP, Vulnerabilities by WASC, Most vulnerable URLs.
display.groups	(ScanAppReportGroup) The group category to be included in the report: URL, OWASP, WASC, State, Category, QID, Group.
display.options	(rawLevels) 5 (Urgent), 4 (Critical), 3 (Serious), 2 (Medium), 1 (Minimal)

## Sample - Create a catalog report

Let us create a catalog report in CSV format, selecting a single tag for the target.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <Report>  
      <name><![CDATA[with all parameters CSV]]></name>  
      <description><![CDATA[A simple Catalog report]]></description>  
      <type>WAS_CATALOG_REPORT</type>  
      <format>CSV</format>  
      <config>  
        <catalogReport>  
          <display>
```

```

    <contents>
      <CatalogReportContent>DESCRIPTION</CatalogReportContent>
      <CatalogReportContent>SUMMARY</CatalogReportContent>
      <CatalogReportContent>GRAPHS</CatalogReportContent>
      <CatalogReportContent>RESULTS</CatalogReportContent>
      <CatalogReportContent>INDIVIDUAL_RECORDS</CatalogReportC
ontent>
    </contents>
    <graphs>
      <CatalogReportGraph>ENTRIES_ADDED_OVER_TIME</CatalogRepo
rtGraph>
      <CatalogReportGraph>ENTRIES_BY_STATUS</CatalogReportGrap
h>
    </graphs>
    <groups>
      <CatalogReportGroup>STATUS</CatalogReportGroup>
      <CatalogReportGroup>OPERATING_SYSTEM</CatalogReportGroup
>
    </groups>
  </display>
  <filters>
    <status>
      <EntryStatus>NEW</EntryStatus>
      <EntryStatus>SUBSCRIPTION</EntryStatus>
      <EntryStatus>ROGUE</EntryStatus>
      <EntryStatus>APPROVED</EntryStatus>
      <EntryStatus>REJECTED</EntryStatus>
    </status>
    <scanDate>
      <startDate>2017-06-29</startDate>
      <endDate>2017-06-29</endDate>
    </scanDate>
    <url><![CDATA[mysite.fr]]></url>
    <os><![CDATA[unix]]></os>
  </filters>
</catalogReport>
</config>
</Report>
</data>
</ServiceRequest>

```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd">
<responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>5629</id>
    </Report>
  </data>
</ServiceResponse>
```

## Sample - Create a catalog report using report template

Let's generate a catalog report in PDF format using a specific template (identified by its template ID).

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/report" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <Report>
      <name><![CDATA[Catalog Report for Servers]]></name>
      <description><![CDATA[A simple catalog
report]]></description>
      <format>PDF</format>
      <template>
        <id>876050</id>
      </template>
    </Report>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/
xsd/3.0/was/report.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Report>
      <id>973058</id>
    </Report>
  </data>
</ServiceResponse>
```

## XSD

[platform API server](https://qualysapi.qualys.com/qps/xsd/3.0/was/report.xsd)/qps/xsd/3.0/was/report.xsd

## Report Template Count

/qps/rest/3.0/count/was/reporttemplate

[POST]

Returns the total number of report templates in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access".

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. See [Reference: Report Creation](#) for details.

[Click here for available operators](#)

Parameter	Description
id	(integer) The report ID. This element is assigned by the service and is required for a certain type of request (details, status, update, delete, send or download).
name	(text) A report name (maximum 256 characters). Applies to all reports.
type	(keyword) The report type, one of: WAS_SCAN_REPORT, WAS_WEBAPP_REPORT, WAS_SCORECARD_REPORT, WAS_CATALOG_REPORT, DATALIST_REPORT.

### Sample - Count the report templates

You can search for templates by using different filters for template ID, template name or type of report. Let's consider an example of searching report template using filter for template ID.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/reporttemplate" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="id" operator="EQUALS">1234</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/  
was/reporttemplate.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>6</count>  
</ServiceResponse>
```

### XSD

[<platform API server>/qps/xsd/3.0/was/report.xsd](#)

## Search Report Template

/qps/rest/3.0/search/was/reporttemplate

[POST]

You can search for existing report templates

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access".

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND. The element "target" is required and at least one "scans" child element is required. See [Reference: Report Creation](#) for details.

[Click here for available operators](#)

Parameter	Description
id	(integer) The report ID. This element is assigned by the service and is required for a certain type of request (details, status, update, delete, send or download).
name	(text) A report name (maximum 256 characters). Applies to all reports.
type	(keyword) The report type, one of: WAS_SCAN_REPORT, WAS_WEBAPP_REPORT, WAS_SCORECARD_REPORT, WAS_CATALOG_REPORT, DATALIST_REPORT.

### Sample - Search report templates

You can search for templates by using different filters for template ID, template name or type of report. Let's consider an example of searching report template using filter for template ID.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/reporttemplate"
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="id" operator="EQUALS">876048</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/
was/reporttemplate.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <ReportTemplate>
      <id>876048</id>
      <name><![CDATA[Web Application Report]]></name>
      <description>
        <![CDATA[Each targeted web application is listed with
the total number of detected vulnerabilities and sensitive content.]]>
      </description>
      <owner>
        <id>23220145</id>
        <username>username</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Smith]]></lastName>
      </owner>
      <type>WAS_WEBAPP_REPORT</type>
      <creationDate>2017-04-11T09:29:23Z</creationDate>
```

```

    <tags>
      <count>0</count>
    </tags>
    <config>
      <webAppReportTemplate>
        <display>
          <contents>
<WebAppReportContent>DESCRIPTION</WebAppReportContent>
<WebAppReportContent>SUMMARY</WebAppReportContent>
<WebAppReportContent>GRAPHS</WebAppReportContent>
<WebAppReportContent>RESULTS</WebAppReportContent>
<WebAppReportContent>INDIVIDUAL_RECORDS</WebAppReportContent>
<WebAppReportContent>RECORD_DETAILS</WebAppReportContent>
<WebAppReportContent>APPENDIX</WebAppReportContent>
          </contents>
          <graphs>
<WebAppReportGraph>VULNERABILITIES_BY_SEVERITY</WebAppReportGraph>
<WebAppReportGraph>VULNERABILITIES_BY_STATUS</WebAppReportGraph>
<WebAppReportGraph>VULNERABILITIES_BY_GROUP</WebAppReportGraph>
<WebAppReportGraph>VULNERABILITIES_BY_OWASP</WebAppReportGraph>
          </graphs>
          <groups>
            <WebAppReportGroup>WEBAPP</WebAppReportGroup>
          >
            <WebAppReportGroup>CATEGORY</WebAppReportGro
up>
            <WebAppReportGroup>GROUP</WebAppReportGroup>
            <WebAppReportGroup>QID</WebAppReportGroup>
          </groups>
          <options>
            <rawLevels>>true</rawLevels>
          </options>
        </display>
        <filters>
          <includedSearchLists/>
          <excludedSearchLists/>
          <url><![CDATA[null]]></url>
          <status>
            <WebAppFindingStatus>NEW</WebAppFindingStatus
>
            <WebAppFindingStatus>ACTIVE</WebAppFindingS
tatus>
            <WebAppFindingStatus>REOPENED</WebAppFindingSta
tus>
          </status>

```

```
        <remediation>
            <showPatched>SHOW_BOTH</showPatched>
            <showIgnored>SHOW_NONE</showIgnored>
            <ignoredReasons>
<IgnoredReason>NOT_APPLICABLE</IgnoredReason>
<IgnoredReason>FALSE_POSITIVE</IgnoredReason>
            <IgnoredReason>RISK_ACCEPTED</IgnoredR
eason>
            </ignoredReasons>
        </remediation>
    </filters>
</webAppReportTemplate>
</config>
</ReportTemplate>
</data>
</ServiceResponse>
```

## XSD

[platform API server/qps/xsd/3.0/was/report.xsd](http://platform API server/qps/xsd/3.0/was/report.xsd)

## Get details of Report Template

/qps/rest/3.0/get/was/reporttemplate/<id>

[GET]

View details for a report template which is in the user's scope. See "Search Report Template" to find a record ID to use as input.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access".

### Input Parameters

The element "id" (integer) is required, where "id" identifies the report.

[Click here for available operators](#)

### Sample - Get details of the report template

Let us get details of a report template.

#### API request

```
curl -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/reporttemplate/876048"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/reporttemplate.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <ReportTemplate>  
      <id>876048</id>  
      <name><![CDATA[Web Application Report]]></name>  
      <description>
```

```

    <![CDATA[Each targeted web application is listed with
the total number of detected vulnerabilities and sensitive content.]]>
    </description>
    <owner>
      <id>23220145</id>
      <username>john_doe</username>
      <firstName><![CDATA[John]]></firstName>
      <lastName><![CDATA[Doe]]></lastName>
    </owner>
    <type>WAS_WEBAPP_REPORT</type>
    <creationDate>2017-04-11T09:29:23Z</creationDate>
    <tags>
      <count>0</count>
    </tags>
    <config>
      <webAppReportTemplate>
        <display>
          <contents>
<WebAppReportContent>DESCRIPTION</WebAppReportContent>
          <WebAppReportContent>SUMMARY</WebAppReportCo
ntent>
          <WebAppReportContent>GRAPHS</WebAppReportCon
tent>
          <WebAppReportContent>RESULTS</WebAppReportC
ontent>
          <WebAppReportContent>INDIVIDUAL_RECORDS</We
bAppReportContent>
          <WebAppReportContent>RECORD_DETAILS</WebApp
ReportContent>
          <WebAppReportContent>APPENDIX</WebAppReport
Content>
          </contents>
          <graphs>
<WebAppReportGraph>VULNERABILITIES_BY_SEVERITY</WebAppReportGraph>
          <WebAppReportGraph>VULNERABILITIES_BY_STATU
S</WebAppReportGraph>
          <WebAppReportGraph>VULNERABILITIES_BY_GROUP
</WebAppReportGraph>
          <WebAppReportGraph>VULNERABILITIES_BY_OWASP
</WebAppReportGraph>
          </graphs>
          <groups>
            <WebAppReportGroup>WEBAPP</WebAppReportGro
up>
            <WebAppReportGroup>CATEGORY</WebAppReportG
roup>

```

```

p>
    <WebAppReportGroup>GROUP</WebAppReportGroup>
    <WebAppReportGroup>QID</WebAppReportGroup>
  </groups>
  <options>
    <rawLevels>>true</rawLevels>
  </options>
</display>
<filters>
  <includedSearchLists/>
  <excludedSearchLists/>
  <url><![CDATA[null]]></url>
  <status>
    <WebAppFindingStatus>NEW</WebAppFindingStat
us>
    <WebAppFindingStatus>ACTIVE</WebAppFindingS
tatus>
    <WebAppFindingStatus>REOPENED</WebAppFindingSt
atus>
  </status>
  <remediation>
    <showPatched>SHOW_BOTH</showPatched>
    <showIgnored>SHOW_NONE</showIgnored>
    <ignoredReasons>
      <IgnoredReason>NOT_APPLICABLE</IgnoredR
eason>
      <IgnoredReason>FALSE_POSITIVE</IgnoredReason>
      <IgnoredReason>RISK_ACCEPTED</IgnoredR
eason>
    </ignoredReasons>
  </remediation>
</filters>
</webAppReportTemplate>
</config>
</ReportTemplate>
</data>
</ServiceResponse>

```

## XSD

[<platform API server>/qps/xsd/3.0/was/report.xsd](#)

## Reference: Report

The <Report> element includes sub elements used to define a web application report. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) The report ID. This element is assigned by the service and is required for a certain type of request (details, status, update, delete, send or download).
name	(text) A report name (maximum 256 characters). Applies to all reports.  Note: Generating a report without template will allow you to assign a name to the report. If you use template during report generation, the name you provide in the request is ignored and the template name is assigned to the report.
description	(text) A description of the report.
owner*	This element is assigned by the service and may be specified for an update request only.  Example: <pre>&lt;owner&gt;   &lt;id&gt;123056&lt;/id&gt;   &lt;username&gt;username&lt;/username&gt;   &lt;firstName&gt;&lt;![CDATA[Johns]]&gt;&lt;/firstName&gt;   &lt;lastName&gt;&lt;![CDATA[Smith]]&gt;&lt;/lastName&gt; &lt;/owner&gt;</pre>
type	(text) The report type, one of: WAS_SCAN_REPORT, WAS_WEBAPP_REPORT, WAS_SCORECARD_REPORT, WAS_CATALOG_REPORT, DATALIST_REPORT
format	(text) The format of the report, one of: HTML_ZIPPED,

HTML\_BASE64, PDF, PDF\_ENCRYPTED,  
POWERPOINT, CSV, CSV\_V2, XML, WORD

**tags\*** This element identifies the tags associated with the report.

Example:

```
<tags>
  <count>2</count>
  <list>
    <Tag>
      <id>99509</id>
      <name><![CDATA[Tag 1]]></name>
    </Tag>
    <Tag>
      <id>99511</id>
      <name><![CDATA[Tag 2]]></name>
    </Tag>
  </list>
</tags>
```

**password** (text) The password for a PDF encrypted report.

**distributionList\*** This element specifies the email addresses for distribution of the report.

Example:

```
<distributionList>
  <count>2</count>
  <list>
    <EmailAddress><![CDATA[1@abc.com]]></EmailAddress>
    <EmailAddress><![CDATA[2@abc.com]]></EmailAddress>
  </list>
</distributionList>
```

**config\*** The configuration options for report creation.

...

Example:

```
<config>
  <webAppReport>
    <target>
      <tags>
        <Tag>
```

Qualys Web Application Scanning API  
Report Creation

```
<id>102609</id>
</Tag>
</tags>
<webapps>
  <WebApp>
    <id>324538</id>
  </WebApp>
</webapps>
</target>
```

status	(keyword) The status of the report: RUNNING, ERROR or COMPLETE
creationDate	(date) The date when the report was created in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).
lastDownloadDate	(date) The date when the report was last downloaded in UTC date/time format (YYYY-MM-DDTHH:MM:SSZ).
downloadCount	(integer) The number of times the report has been downloaded.

## Reference: Report Creation

The Report “config” element includes sub elements used to define a web application report type. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) The report ID. This element is assigned by the service and is required for a certain type of request (details, status, update, delete, send or download).
name	(text) A report name (maximum 256 characters). Applies to all reports.  Note: Generating a report without template will allow you to assign a name to the report. If you use template during report generation, the name you provide in the request is ignored and the template name is assigned to the report.
target*	A report target. Applies to all reports.  Example for a web application report: <pre>&lt;tags&gt;   &lt;included&gt;     &lt;option&gt;ALL&lt;/option&gt;     &lt;tagList&gt;       &lt;set&gt;         &lt;Tag&gt;&lt;id&gt;12017424&lt;/id&gt;&lt;/Tag&gt;         &lt;Tag&gt;&lt;id&gt;12017228&lt;/id&gt;&lt;/Tag&gt;       &lt;/set&gt;     &lt;/tagList&gt;   &lt;/included&gt;   &lt;excluded&gt;     &lt;option&gt;ANY&lt;/option&gt;     &lt;tagList&gt;       &lt;set&gt;         &lt;Tag&gt;&lt;id&gt;12017228&lt;/id&gt;&lt;/Tag&gt;</pre>

```
        </set>  
      </tagList>  
    </excluded>  
  </tags>
```

template.id (integer) The template ID. This element is assigned by the system and is required

for a certain type of request.

Example:

```
<template>  
  <id>876048</id>  
</template>
```

type (text) The report type, one of: WAS\_SCAN\_REPORT, WAS\_WEBAPP\_REPORT, WAS\_SCORECARD\_REPORT, WAS\_CATALOG\_REPORT, DATALIST\_REPORT

password (text) A password for a encrypted PDF report. Applies to all reports.

distributionList\* Email addresses for a report distribution list. Applies to all reports.

Example:

```
<distributionList>  
  <set>  
    <EmailAddress><EMAIL_ADDRESS1></EmailAddress>  
    <EmailAddress><EMAIL_ADDRESS2></EmailAddress>  
  </set>  
</distributionList>
```

display.contents\* Identifies the report content to display.

Values: DESCRIPTION, SUMMARY, GRAPHS, RESULTS, INDIVIDUAL\_RECORDS (all reports)

Values: RECORD\_DETAILS, ALL\_RESULTS, APPENDIX (Web Application Report and Scan

Report)

Example for a Scan Report:

```
<display>
  <contents>
    <ScanReportContent>GRAPHS</ScanReportContent>
    <ScanReportContent>RESULTS</ScanReportContent>
  </contents>
</display>
```

display.graphs\*

Identifies the graphs to display. Applies to all reports.

Example for a Scan Report:

```
<display>
<graphs>
  <ScanReportGraph>
    MOST_VULNERABLE_URLS
  </ScanReportGraph>
  <ScanReportGraph>
    VULNERABILITIES_BY_SEVERITY
  </ScanReportGraph>
  <ScanReportGraph>
    VULNERABILITIES_BY_GROUP
  </ScanReportGraph>
  <ScanReportGraph>
    VULNERABILITIES_BY_OWASP
  </ScanReportGraph>
  <ScanReportGraph>
    VULNERABILITIES_BY_WASC
  </ScanReportGraph>
  <ScanReportGraph>
    SENSITIVE_CONTENTS_BY_GROUP
  </ScanReportGraph>
</graphs>
</display>
```

display.groups\*

Identifies the vulnerability groups to display. Applies to all reports.

Example for a Web Application Report or Scan Report:

```
<display>
  <groups>
    <WebAppReportGroup>GROUP</WebAppReportGroup>
    <WebAppReportGroup>OWASP</WebAppReportGroup>
    <WebAppReportGroup>WASC</WebAppReportGroup>
  </groups>
</display>
```

display.options\*

Specifies whether to display severity using levels (1 through 5) or using ratings (low, medium, high). Applies to all reports.

filters.searchlists\*

Identifies search list filters. Applies to a Web Application Report, Scan Report or Scorecard Report.

Example:

```
<filters>
  <SearchLists>
    <SearchList>
      <id>43147</id>
    </SearchList>
  </SearchLists>
</filters>
```

filters.url (text)

Identifies URL filters. Applies to a Web Application Report, Scan Report or Catalog Report.

Example:

```
<filters>
<url>http://www.mysite.com/help.html</url>
...
</filters>
```

filters.status\*

Identifies status filters. Applies to Web Application Report, Scan Report and Catalog Report.

Values for Web Application Report and Scan Report:  
NEW, ACTIVE, REOPENED, FIXED

Values for Catalog Report: NEW, ROGUE,  
APPROVED, REJECTED, SUBSCRIPTION

filters.showPatched

Identifies whether to include/not include findings with

(keyword)	<p>virtual patches. Applies to Web Application Report and Scan Report.</p> <p>Values:</p> <p>SHOW_ONLY - show patched findings only</p> <p>SHOW_BOTH - show patched &amp; unpatched findings (default)</p> <p>SHOW_NONE - show unpatched findings only</p>
filters.remediation.showIgnored (boolean)	<p>Include ignored findings: true or false</p>
filters.remediation.ignoredReasons (keyword)	<p>Identifies the types of findings to be included in the report. Applies to Scan Report.</p> <p>Values:</p> <p>FALSE_POSITIVE - include false positive findings in the report</p> <p>RISK_ACCEPTED - include risk accepted findings in the report</p> <p>NOT_APPLICABLE - include findings marked as not applicable in the report</p>
filters.scanDate*	<p>Applies to a Scorecard Report and Catalog Report.</p> <p>Example:</p> <pre>&lt;filters&gt;   &lt;scanDate&gt;     &lt;startDate&gt;2017-08-28&lt;/startDate&gt;     &lt;endDate&gt;2017-10-28&lt;/endDate&gt;   &lt;/scanDate&gt; &lt;/filters&gt;</pre>
filters.scanStatus*	<p>Applies to a Scorecard Report. Tip - Specify SERVICE_ERROR to include scans with the status</p>

Service Errors Detected.

Example:

```
<filters>  
  <scanStatus>FINISHED</scanStatus>  
</filters>
```

filters.scanAuthStatus\* Applies to a Scorecard Report

Example:

```
<filters>  
  <scanAuthStatus>SUCCESSFUL</scanAuthStatus>  
</filters>
```

filters.ip (text) Applies to a Catalog Report

Example:

```
<filters>  
  <ip><![CDATA[10.56.64.245]]></ip>  
</filters>
```

filters.os (text) Applies to a Catalog Report

Example:

```
<filters>  
  <os><![CDATA[unix]]></os>  
</filters>
```

# Findings

## Finding Count

/qps/rest/3.0/count/was/finding

[POST]

Returns the total number of findings on web application(s) in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The count includes web applications in the user's scope.

## Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) ID of the finding (WebAppVuln, WebApplg, or WebAppSensitiveContent).
uniqueId	(value) The 36-bit unique id assigned to the finding.  For example:  <pre>&lt;Finding&gt;   &lt;id&gt;132990&lt;/id&gt;   &lt;uniqueId&gt;8a2c4d51-6d28-2b92-e053- 2943720a74ab&lt;/uniqueId&gt;   &lt;qid&gt;150004&lt;/qid&gt;   ...</pre>
qid	(integer) Qualys ID assigned to the detection.

name	(text) Name of the detection finding.
type	(keyword) Type of the finding: VULNERABILITY, SENSITIVE_CONTENT, or INFORMATION_GATHERED.
url	(text) URL of the web application on which the finding was detected.
webApp.tags.id	(date) ID of the tag associated with the web application on which the finding was detected.
webApp.tags.name	(text) Name of the tag associated with the web application on which the finding was detected.
status	(keyword) Status of the finding: NEW, ACTIVE, REOPENED, PROTECTED and FIXED.
patch	(integer-long) Use WAF to protect against vulnerabilities by installing virtual patches.
webApp.id	(integer) ID of the web application on which the finding was detected.
webApp.name	(text) Name of the web application on which the finding was detected.
severity	(integer) Severity of the finding.
externalRef	(string) Tip - Use operator IS EMPTY for findings with empty external references.
ignoredDate	(date) The date on which the finding was marked to ignore.
ignoredReason	(keyword) The reason for which the finding is ignored: FALSE_POSITIVE, RISK_ACCEPTED or NOT_APPLICABLE
group	(keyword) XSS, SQL, INFO, PATH, CC, SSN_US or

	CUSTOM
owasp.name	(text) Name of the OWASP vulnerability.
owasp.code	(integer) Code associated with the OWASP vulnerability
wasc.name	(text) Name of the vulnerability.
wasc.code	(integer) Code of the vulnerability.
cwe.id	(integer) ID associated with CWE.
firstDetectedDate	(date) The date when the finding was first detected in the web application,
lastDetectedDate	(date) The date when the finding was last detected in the web application.
lastTestedDate	(date) The date when the finding was last tested in the web application.
timesDetected	(integer) The count indicating the number of times the finding was detected.
severity level	(integer) The severity associated with the finding:1,2,3,4,5

### Sample - Get count of all findings

Return the number (count) of all findings in the user's scope.

#### API request

```
curl -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/finding/"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchemainstance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2815</count>
</ServiceResponse>
```

## Sample - Get count of findings with a criteria

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/finding/" <
file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="type"
operator="EQUALS">VULNERABILITY</Criteria>
    <Criteria field="severity" operator="EQUALS">5</Criteria>
    <Criteria field="status" operator="IN">NEW, ACTIVE,
REOPENED</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchemainstance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>41</count>
</ServiceResponse>
```

## Sample - Get details of finding

If you search for a finding using unique ID (uniqueId), the count will always be one.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/finding/" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="uniqueId" operator="EQUALS">8a2c4d51-6d28-2b92-  
e053-2943720a74ab</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
was/finding.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
</ServiceResponse>
```

### XSD

[<platform API server>/qps/xsd/3.0/was/finding.xsd](#)

## Search Findings

/qps/rest/3.0/search/was/finding

[POST]

Returns list of findings (vulnerabilities, sensitive contents, information gathered) found in web applications which are in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes findings in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) ID of the finding (WebAppVuln, WebApplg, or WebAppSensitiveContent).
uniqueId	(value) The 36-bit unique id assigned to the finding.  For example:  <pre>&lt;Finding&gt;   &lt;id&gt;132990&lt;/id&gt;   &lt;uniqueId&gt;8a2c4d51-6d28-2b92-e053-2943720a74ab&lt;/uniqueId&gt;   &lt;qid&gt;150004&lt;/qid&gt;   ...</pre>
qid	(integer) Qualys ID assigned to the detection.
name	(text) Name of the detection finding.

type	(keyword) Type of the finding: VULNERABILITY, SENSITIVE_CONTENT, or INFORMATION_GATHERED.
url	(text) URL of the web application on which the finding was detected.
webApp.tags.id	(date) ID of the tag associated with the web application on which the finding was detected.
webApp.tags.name	(text) Name of the tag associated with the web application on which the finding was detected.
status	(keyword) Status of the finding: NEW, ACTIVE, REOPENED, PROTECTED, and FIXED.
patch	(integer-long) Use WAF to protect against vulnerabilities by installing virtual patches.
webApp.id	(integer) ID of the web application on which the finding was detected.
webApp.name	(text) Name of the web application on which the finding was detected.
severity	(integer) Severity of the finding.
externalRef	(string) Tip - Use operator IS EMPTY for findings with empty external references.
ignoredDate	(date) The date on which the finding was marked to ignore.
ignoredReason	(keyword) The reason for which the finding is ignored: FALSE_POSITIVE, RISK_ACCEPTED or NOT_APPLICABLE
group	(keyword) XSS, SQL, INFO, PATH, CC, SSN_US or CUSTOM

owasp.name	(text) Name of the OWASP vulnerability.
owasp.code	(integer) Code associated with the OWASP vulnerability
wasc.name	(text) Name of the vulnerability.
wasc.code	(integer) Code of the vulnerability.
cwe.id	(integer) ID associated with CWE.
firstDetectedDate	(date) The date when the finding was first detected in the web application,
lastDetectedDate	(date) The date when the finding was last detected in the web application.
lastTestedDate	(date) The date when the finding was last tested in the web application.
timesDetected	(integer) The count indicating the number of times the finding was detected.
severity level	(integer) The severity associated with the finding:1,2,3,4,5

## Sample - Search for finding with specific ID

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/search/was/finding/" <file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <preferences>
```

```

    <verbose>true</verbose>
  </preferences>
  <filters>
    <Criteria field="id" operator="EQUALS">156582</Criteria>
  </filters>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>false</hasMoreRecords>
  <data>
    <Finding>
      <id>156582</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
      <qid>150124</qid>
      <name>
        <![CDATA[Clickjacking - Framable Page]]>
      </name>
      <type>VULNERABILITY</type>
      <findingType>QUALYS</findingType>
      <cwe>
        <count>1</count>
        <list>
          <long>451</long>
        </list>
      </cwe>
      <owasp>
        <count>1</count>
        <list>
          <OWASP>
            <name>
              <![CDATA[Security Misconfiguration]]>
            </name>
            <url>
              <![CDATA[https://www.owasp.org/index.php/T
op_10-2017_A6-Security_Misconfiguration]]>
            </url>
            <code>6</code>
          </OWASP>
        </list>
      </owasp>
    </Finding>
  </data>
</ServiceResponse>

```

```

    </list>
  </owasp>
  <wasc>
    <count>1</count>
    <list>
      <WASC>
        <name>
          <![CDATA[Application Misconfiguration]]>
        </name>
        <url>
          <![CDATA[http://projects.webappsec.org/w/p
age/13246914/WASC]]>
        </url>
        <code>15</code>
      </WASC>
    </list>
  </wasc>
  <resultList>
    <count>1</count>
    <list>
      <Result>
        <authentication>>false</authentication>
        <ajax>>false</ajax>
        <payloads>
          <count>1</count>
          <list>
            <PayloadInstance>
              <payload>
                <![CDATA[N/A]]>
              </payload>
              <request>
                <method>
                  <![CDATA[GET]]>
                </method>
                <link>
                  <![CDATA[http://funkytown.
vuln.qa.qualys.com/cassium/xss/]]>
                </link>
                <headers>
                  <![CDATA[]]>
                </headers>
              </request>
              <response>
                <![CDATA[The URI was framed.
]]>

```

```

        </response>
      </PayloadInstance>
    </list>
  </payloads>
</Result>
</list>
</resultList>
<severity>3</severity>
<url>
  <![CDATA[http://funkytown.vuln.qa.qualys.com/cassium/x
ss/]]>
  </url>
  <status>ACTIVE</status>
  <firstDetectedDate>2017-04-
28T09:36:13Z</firstDetectedDate>
  <lastDetectedDate>2018-02-21T09:03:32Z</lastDetectedDate>
  <lastTestedDate>2018-02-21T09:03:32Z</lastTestedDate>
  <timesDetected>3</timesDetected>
  <webApp>
    <id>286824</id>
    <name>
      <![CDATA[webapp]]>
    </name>
    <url>
      <![CDATA[http://funkytown.vuln.qa.qualys.com:80/ca
ssium/xss/]]>
    </url>
    <tags>
      <count>2</count>
      <list>
        <Tag>
          <id>8753812</id>
          <name>
            <![CDATA[Multiscan]]>
          </name>
        </Tag>
        <Tag>
          <id>9029017</id>
          <name>
            <![CDATA[TagWebapp1]]>
          </name>
        </Tag>
      </list>
    </tags>
  </webApp>

```

```

    <isIgnored>true</isIgnored>
    <ignoredReason>FALSE_POSITIVE</ignoredReason>
    <ignoredBy>
      <id>1056860</id>
      <username>user_john</username>
      <firstName>
        <![CDATA[John]]>
      </firstName>
      <lastName>
        <![CDATA[Doe]]>
      </lastName>
    </ignoredBy>
    <ignoredDate>2019-03-04T03:19:29Z</ignoredDate>
    <ignoredComment>
      <![CDATA[This is test comment]]>
    </ignoredComment>
    <retest/>
  </Finding>
</data>
</ServiceResponse>

```

## Sample - Search with criteria: condensed response

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/finding/" <
file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="id" operator="EQUALS">935943</Criteria>
  </filters>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/finding.xsd">

```

```

<responseCode>SUCCESS</responseCode>
<count>1</count>
<hasMoreRecords>>false</hasMoreRecords>
<data>
  <Finding>
    <id>935943</id>
    <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    <qid>150117</qid>
    <name>
      <![CDATA[Path-Based Cross-Site Scripting (XSS)]]>
    </name>
    <type>VULNERABILITY</type>
    <findingType>QUALYS</findingType>
    <severity>5</severity>
    <url>
      <![CDATA[http://funkytown.vuln.qa.example.com/cassium/
traversal/page_48/%22%3e%3cimg%20src%3dq%20onerror%3dalert(9)%3e]]>
    </url>
    <status>ACTIVE</status>
    <firstDetectedDate>2017-04-
04T06:15:33Z</firstDetectedDate>
    <lastDetectedDate>2017-04-04T06:16:20Z</lastDetectedDate>
    <lastTestedDate>2017-04-04T06:16:20Z</lastTestedDate>
    <timesDetected>3</timesDetected>
    <webApp>
      <id>4080112</id>
      <name>
        <![CDATA[web app 1491286489688]]>
      </name>
      <url>
        <![CDATA[http://funkytown.vuln.qa.example.com:80/c
assium/xss/]]>
      </url>
    </webApp>
    <isIgnored>>true</isIgnored>
  </Finding>
</data>
</ServiceResponse>

```

## Sample - Search with criteria: condensed response

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
```

```
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/finding/" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="id" operator="EQUALS">935943</Criteria>
  </filters>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <Finding>
      <id>935943</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
      <qid>150117</qid>
      <name>
        <![CDATA[Path-Based Cross-Site Scripting (XSS)]]>
      </name>
      <type>VULNERABILITY</type>
      <findingType>QUALYS</findingType>
      <severity>5</severity>
      <url>
        <![CDATA[http://funkytown.vuln.qa.example.com/cassium/
traversal/page_48/%22%3e%3cimg%20src%3dq%20onerror%3dalert(9)%3e]]>
      </url>
      <status>ACTIVE</status>
      <firstDetectedDate>2017-04-
04T06:15:33Z</firstDetectedDate>
      <lastDetectedDate>2017-04-04T06:16:20Z</lastDetectedDate>
      <lastTestedDate>2017-04-04T06:16:20Z</lastTestedDate>
      <timesDetected>3</timesDetected>
      <webApp>
        <id>4080112</id>
        <name>
```

```

        <![CDATA[web app 1491286489688]]>
    </name>
    <url>
        <![CDATA[http://funkytown.vuln.qa.example.com:80/c
assium/xss/]]>
    </url>
</webApp>
<isIgnored>true</isIgnored>
</Finding>
</data>

```

## Sample - Search finding using uniqueId

As every uniqueId is unique, using uniqueId, you could search for the exact finding.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/finding/" <
file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="uniqueId" operator="EQUALS">8a2c4d51-6d28-2b92-
e053-2943720a74ab</Criteria>
  </filters>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <Finding>

```

```
<id>132990</id>
<uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
<qid>150004</qid>
<name>
  <![CDATA[Path-Based Vulnerability]]>
</name>
<type>VULNERABILITY</type>
<findingType>QUALYS</findingType>
<cwe>
  <count>1</count>
  <list>
    <long>22</long>
  </list>
</cwe>
  ...
</webApp>
<isIgnored>>false</isIgnored>
<retest/>
</Finding>
</data>
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server/qps/xsd/3.0/was/finding.xsd)/qps/xsd/3.0/was/finding.xsd

## Get Finding Details

/qps/rest/3.0/get/was/finding/<id>

[GET]

Returns details for a finding on a web application which is in the user's scope. See "Search findings" to find a record ID to use as input? See [Search Findings](#).

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The output includes findings for web applications in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies a finding (WebAppVuln, WebApplg, or WebAppSensitiveContent).

[Click here for available operators](#)

### Sample - View details for the finding

Let us view details for the web application with the ID 1729432.

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/finding/1729432"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/finding.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Finding>  
      <id>1729432</id>  
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
```

```

<qid>150117</qid>
<name>
  <![CDATA[Path-Based Cross-Site Scripting (XSS)]]>
</name>
<type>VULNERABILITY</type>
<findingType>QUALYS</findingType>
<group>XSS</group>
<cwe>
  <count>1</count>
  <list>
    <long>79</long>
  </list>
</cwe>
<owasp>
  <count>1</count>
  <list>
    <OWASP>
      <name>
        <![CDATA[Cross-Site Scripting (XSS)]]>
      </name>
      <url>
        <![CDATA[https://www.owasp.org/index.php/T
op_10-2017_A7-Cross-Site_Scripting_(XSS)]]>
      </url>
      <code>7</code>
    </OWASP>
  </list>
</owasp>
<wasc>
  <count>1</count>
  <list>
    <WASC>
      <name>
        <![CDATA[Cross-Site Scripting]]>
      </name>
      <url>
        <![CDATA[http://projects.webappsec.org/w/page/13246920/WASC]]>
      </url>
      <code>8</code>
    </WASC>
  </list>
</wasc>
<resultList>
  <count>1</count>
  <list>

```

```

    <Result>
      <authentication>>false</authentication>
      <ajax>>false</ajax>
      <payloads>
        <count>1</count>
        <list>
          <PayloadInstance>
            <payload>
              <![CDATA[@APPEND@/%22%3e%3cimg
%20src%3dq%20onerror%3dalert(9)%3e]]>
            </payload>
            <request>
              <method>
                <![CDATA[GET]]>
              </method>
              <link>
                <![CDATA[http://funkytown.vuln.qa.qualys.com/cassium/traversal/page_48
/%22%3e%3cimg%20src%3dq%20onerror%3dalert(9)%3e]]>
              </link>
              <headers>
                <![CDATA[UmVmZXJlcjogaHR0cDovL2Z1bmt5dG93bi52dWxuLnFhLnF1YWx5cy5jb20vY
2Fzc2l1bS94c3MvDQpDb29raWU6IFBIUFNFU1NJRd00ODlmNTI4ZjUxNWE1MTY3MjM0OTQ
wNzExYTE1MWM0MDsNCg==]]>
              </headers>
            </request>
            <response>
              <![CDATA[<html><head><title>We
lcome to page page_48/\ "><img src=q
onerror=alert(9)></title></head><body><h1>Welcome to page
page_48/\ "><img src=q onerror=alert(9)></h1><h1>Click <a
href='/cassium/traversal/page_49'>here</a> to go to the next
page.Click<a href='/cassium/traversal/page_47'>here</a> to go back to
the previous page.</body></html>]]>
            </response>
          </PayloadInstance>
        </list>
      </payloads>
    </Result>
  </list>
</resultList>
<severity>5</severity>

```

```

<url>
<![CDATA[http://funkytown.vuln.qa.example.com/cassium/traversal/page_4
8/%22%3e%3cimg%20src%3dq%20onerror%3dalert(9)%3e]]>
</url>
<status>ACTIVE</status>
<firstDetectedDate>2017-04-04T06:15:33Z</firstDetectedDate>
<lastDetectedDate>2017-04-04T06:16:20Z</lastDetectedDate>
<lastTestedDate>2017-04-04T06:16:20Z</lastTestedDate>
<timesDetected>3</timesDetected>
<webApp>
  <id>4080112</id>
  <name>
    <![CDATA[web app 1491286489688]]>
  </name>
  <url>
    <![CDATA[http://funkytown.vuln.qa.example.com:80/cassium/xss/]
]>
  </url>
  <tags>
    <count>2</count>
    <list>
      <Tag>
        <id>8753812</id>
        <name>
          <![CDATA[Multiscan]]>
        </name>
      </Tag>
      <Tag>
        <id>9029017</id>
        <name>
          <![CDATA[TagWebapp1]]>
        </name>
      </Tag>
    </list>
  </tags>
</webApp>
<isIgnored>true</isIgnored>
<ignoredReason>FALSE_POSITIVE</ignoredReason>
<ignoredBy>
  <id>6717940</id>
  <username>user_john</username>
  <firstName>
    <![CDATA[John]]>
  </firstName>
  <lastName>

```

```

    <![CDATA[Doe]]>
  </lastName>
</ignoredBy>
<ignoredDate>2018-09-06T06:15:44Z</ignoredDate>
<ignoredComment>
  <![CDATA[Test comment]]>
</ignoredComment>
<retest/>
</Finding>
</data>
</ServiceResponse>

```

## Sample - Get details of finding

You can fetch details of a finding using `uniqueId`.

### API request

```

curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/finding/8a2c4d51-
6d28-2b92-e053-2943720a74ab"

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>132990</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
      <qid>150004</qid>
      <name>
        <![CDATA[Path-Based Vulnerability]]>
      </name>
      <type>VULNERABILITY</type>
      <findingType>QUALYS</findingType>
      <group>PATH</group>
      <cwe>
        <count>1</count>
        <list>

```

```

        <long>22</long>
      </list>
    </cwe>
    ...
    <isIgnored>>false</isIgnored>
    <retest/>
  </Finding>
</data>
</ServiceResponse>

```

## Sample - Groups for Information Gathered Issues

Let us view the two groups for issues of type Information Gathered:

- Diagnostic IG (general information about the scan)
- Weakness IG (issues that are security weakness or conflict with best practices)

The response accordingly reflects to which group the issue belongs.

### API request

```

curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/finding/713223"

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>713223</id>
      <uniqueId>8c9c933f-04f1-f77e-e053-294f2c0ab892</uniqueId>
      <qid>150014</qid>
      <name>
        <![CDATA[External Form Actions Discovered]]>
      </name>
      <type>INFORMATION_GATHERED</type>
      <findingType>QUALYS</findingType>
    </Finding>
  </data>
</ServiceResponse>

```

```

    <group>IG_DIAG</group>
    <resultList>
      <count>1</count>
      <list>
        ....
      </tags>
    </webApp>
  </Finding>
</data>
</ServiceResponse>

```

## Sample - Get details of findings with "SSL/TLS and Certificate issues"

Let us fetch details of a finding that includes different types of SSL/TLS and Certificate issues. Depending on the type of the finding, the details are listed in Information Gathered and Information Disclosure type. The different types of SSL/TLS and certificate issues that we support are:

- SSL Data with Certificate Fingerprint
- SSL Data with Prop
- SSL Data with Kex
- SSL Data with Ciphers

The finding you view could include one or multiple issues for an issue type that is listed above. The name tag indicates the type of the issue.

### API request

```

curl -n -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/finding/581856"

```

### XML response (SSL Data with Certificate Fingerprint)

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>

```

```

<Finding>
  <id>581856</id>
  <uniqueId>d6a88c61-fcda-4f46-9767-1d8cb521d953</uniqueId>
  <qid>86002</qid>
  <name>
    <![CDATA[SSL Certificate - Information]]>
  </name>
  <type>INFORMATION_GATHERED</type>
  <findingType>QUALYS</findingType>
  ...
  <sslDataInfoList>
    <list>
      <SSLDataInfo>
        <certificateFingerprint>291126AC8ED272F71E
DF06E5B76BBECD1C811769D4FE988DE95FF848AFEB6A</certificateFingerprint
>
        </SSLDataInfo>
      </list>
    </sslDataInfoList>
  </sslData>
</Finding>
</data>
</ServiceResponse>

```

## XSD

[platform API server/qps/xsd/3.0/was/finding.xsd](http://platform API server/qps/xsd/3.0/was/finding.xsd)

## Ignore Findings

```
/qps/rest/3.0/ignore/was/finding  
/qps/rest/3.0/ignore/was/finding/<id>
```

[POST]

Ignore findings for a web application which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Ignore Vulnerabilities" permission. The output includes findings for web applications in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) ID of the finding (WebAppVuln, WebApplg, or WebAppSensitiveContent).
uniqueId	(value) The 36-bit unique id assigned to the finding.  For example:  <Finding> <id>132990</id> <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId> <qid>150004</qid> ...
qid	(integer) Qualys ID assigned to the detection.

name	(text) Name of the detection finding.
type	(keyword) Type of the finding: VULNERABILITY, SENSITIVE_CONTENT, or INFORMATION_GATHERED.
url	(text) URL of the web application on which the finding was detected.
webApp.tags.id	(date) ID of the tag associated with the web application on which the finding was detected.
webApp.tags.name	(text) Name of the tag associated with the web application on which the finding was detected.
status	(keyword) Status of the finding: NEW, ACTIVE, REOPENED, PROTECTED and FIXED.
patch	(integer-long) Use WAF to protect against vulnerabilities by installing virtual patches.
webApp.id	(integer) ID of the web application on which the finding was detected.
webApp.name	(text) Name of the web application on which the finding was detected.
severity	(integer) Severity of the finding.
externalRef	(string) Tip - Use operator IS EMPTY for findings with empty external references.
ignoredDate	(date) The date on which the finding was marked to ignore.
ignoredReason	(keyword) The reason for which the finding is ignored: FALSE_POSITIVE, RISK_ACCEPTED or NOT_APPLICABLE
group	(keyword) XSS, SQL, INFO, PATH, CC, SSN_US or

CUSTOM	
reactivateDate	(date) Specify the date after which the ignored finding should be re-activated. The date/time is specified in YYYY-MM-DD format.
reactivateIn	(integer) Specify the number of days after which the ignored finding should be reactivated.  Note: reactivateDate and reactivateIn are mutually exclusive parameters and cannot be used together. You can use only either of them for a finding.
owasp.name	(text) Name of the OWASP vulnerability.
owasp.code	(integer) Code associated with the OWASP vulnerability
wasc.name	(text) Name of the vulnerability.
wasc.code	(integer) Code of the vulnerability.
cwe.id	(integer) ID associated with CWE.
firstDetectedDate	(date) The date when the finding was first detected in the web application,
lastDetectedDate	(date) The date when the finding was last detected in the web application.
lastTestedDate	(date) The date when the finding was last tested in the web application.
timesDetected	(integer) The count indicating the number of times the finding was detected.
severity level	(integer) The severity associated with the finding:1,2,3,4,5

## Sample - Ignore a specific finding

### API request

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/ignore/was/finding/1645195669"
```

### Request POST data

```
<ServiceRequest>  
  <data>  
    <Finding>  
      <id>1645195669</id>  
      <ignoredReason>FALSE_POSITIVE</ignoredReason>  
      <ignoredComment>test</ignoredComment>  
    </Finding>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/was/finding.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Finding>  
      <id>1645195669</id>  
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>  
    </Finding>  
  </data>  
</ServiceResponse>
```

## Sample - Reactivate an ignored finding (date)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"  
--data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/ignore/was/finding/"
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <Finding>
      <id>927823</id>
      <ignoredReason>FALSE_POSITIVE</ignoredReason>
      <ignoredComment>test</ignoredComment>
      <reactivateDate>2018-11-14</reactivateDate>
    </Finding>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/
was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>927823</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>
</ServiceResponse>
```

## Sample - Reactivate an ignored finding (day)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
--data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/ignore/was/finding/"
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
```

```

<data>
  <Finding>
    <id>927913</id>
    <ignoredReason>FALSE_POSITIVE</ignoredReason>
    <ignoredComment>test</ignoredComment>
    <reactivateIn>1</reactivateIn>
  </Finding>
</data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>927913</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>
</ServiceResponse>

```

## Sample - Ignore multiple findings

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"
--data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/ignore/was/finding/"
Note: "file.xml" contains the request POST data.

```

### Request POST data

```

<ServiceRequest>
  <filters>
    <Criteria field="id" operator="NOT EQUALS">1231056</Criteria>
    <Criteria field="type" operator="NOT
EQUALS">INFORMATION_GATHERED</Criteria>
  </filters>
  <data>

```

```

<Finding>
  <ignoredReason>FALSE_POSITIVE</ignoredReason>
  <ignoredComment>test</ignoredComment>
</Finding>
</data>
</ServiceRequest>

```

Note : When you are trying to ignore findings, make sure that type of finding is passed in data is not of INFORMATION\_GATHERED type as they cannot be ignored. This can be ensured by using type not equals INFORMATION\_GATHERED tag when using NOT EQUALS, GREATER or LESSER operator.

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>27</count>
  <data>
    <Finding>
      <id>1231057</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
    <Finding>
      <id>1231058</id>
      <uniqueId>5a2c4d51-5d28-2b92-e053-2943720a32ab</uniqueId>
    </Finding>
    <Finding>
      <id>1231059</id>
      <uniqueId>4a2c4d51-8d28-2b92-e053-2943720a16ab</uniqueId>
    </Finding>
    <Finding>
      <id>1231060</id>
      <uniqueId>3a2c4d51-9d28-2b92-e053-2943720a90ab</uniqueId>
    </Finding>
    ...
  </data>
</ServiceResponse>

```

### Sample - Ignore finding using uniqueId

As every `uniqueId` is unique, using `uniqueId`, you could ignore the exact finding.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/ignore/was/finding/8a2c4d51
-6d28-2b92-e053-2943720a74ab" < file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
  <data>
    <Finding>
      <ignoredReason>FALSE_POSITIVE</ignoredReason>
      <ignoredComment>test</ignoredComment>
    </Finding>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>132990</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>
</ServiceResponse>
```

### XSD

[platform API server](http://platform-api-server/qps/xsd/3.0/was/finding.xsd)/qps/xsd/3.0/was/finding.xsd

## Activate Findings

/qps/rest/3.0/activate/was/finding

[POST]

Activate ignored findings for a web application which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Ignore Vulnerabilities" permission. The output includes findings for web applications in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) ID of the finding (WebAppVuln, WebAppIlg, or WebAppSensitiveContent).
uniqueId	(value) The 36-bit unique id assigned to the finding.  For example: <pre>&lt;Finding&gt;   &lt;id&gt;132990&lt;/id&gt;   &lt;uniqueId&gt;8a2c4d51-6d28-2b92-e053-2943720a74ab&lt;/uniqueId&gt;   &lt;qid&gt;150004&lt;/qid&gt;   ...</pre>
qid	(integer) Qualys ID assigned to the detection.
name	(text) Name of the detection finding.

type	(keyword) Type of the finding: VULNERABILITY, SENSITIVE_CONTENT, or INFORMATION_GATHERED.
url	(text) URL of the web application on which the finding was detected.
webApp.tags.id	(date) ID of the tag associated with the web application on which the finding was detected.
webApp.tags.name	(text) Name of the tag associated with the web application on which the finding was detected.
status	(keyword) Status of the finding: NEW, ACTIVE, REOPENED, PROTECTED and FIXED.
patch	(integer-long) Use WAF to protect against vulnerabilities by installing virtual patches.
webApp.id	(integer) ID of the web application on which the finding was detected.
webApp.name	(text) Name of the web application on which the finding was detected.
severity	(integer) Severity of the finding.
externalRef	(string) Tip - Use operator IS EMPTY for findings with empty external references.
ignoredDate	(date) The date on which the finding was marked to ignore.
ignoredReason	(keyword) The reason for which the finding is ignored: FALSE_POSITIVE, RISK_ACCEPTED or NOT_APPLICABLE
group	(keyword) XSS, SQL, INFO, PATH, CC, SSN_US or CUSTOM

owasp.name	(text) Name of the OWASP vulnerability.
owasp.code	(integer) Code associated with the OWASP vulnerability
wasc.name	(text) Name of the vulnerability.
wasc.code	(integer) Code of the vulnerability.
cwe.id	(integer) ID associated with CWE.
firstDetectedDate	(date) The date when the finding was first detected in the web application,
lastDetectedDate	(date) The date when the finding was last detected in the web application.
lastTestedDate	(date) The date when the finding was last tested in the web application.
timesDetected	(integer) The count indicating the number of times the finding was detected.
severity level	(integer) The severity associated with the finding:1,2,3,4,5

## Sample - Activate all ignored findings

### API request

```
curl -n -u "USERNAME:PASSWORD"  
"qualysapi.qualys.com/qps/rest/3.0/activate/was/finding"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
/was/finding.xsd">  
  <responseCode>SUCCESS</responseCode>
```

```

<count>3</count>
<data>
  <Finding>
    <id>1613225669</id>
    <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
  </Finding>
  <Finding>
    <id>1613255669</id>
    <uniqueId>9a2c4d41-6d21-2b92-e054-3943720a65ab</uniqueId>
  </Finding>
  <Finding>
    <id>1645195669</id>
    <uniqueId>7a2c4d31-5d28-2b92-e055-4943720a51ab</uniqueId>
  </Finding>
</data>
</ServiceResponse>

```

## Sample - Activate specific finding

### API request

```

curl -n -u "USERNAME:PASSWORD"
"qualysapi.qualys.com/qps/rest/3.0/activate/was/finding/1613255669"

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>1613255669</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>
</ServiceResponse>

```

## Sample - Activate a finding using uniqueId

**API request**

```
curl -n -u "USERNAME:PASSWORD"  
"qualysapi.qualys.com/qps/rest/3.0/activate/was/finding/1613255669"
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
was/finding.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Finding>  
      <id>1613255669</id>  
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>  
    </Finding>  
  </data>  
</ServiceResponse>
```

**XSD**

[<platform API server>/qps/xsd/3.0/was/finding.xsd](#)

## Edit Finding Severity

/qps/rest/3.0/editSeverity/was/finding

/qps/rest/3.0/editSeverity/was/finding/<id>

[POST]

Edit severity level of the given findings.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Ignore Vulnerabilities" permission. User must have access to web application which belongs to given WebAppVuln id. The output includes findings for web applications in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) ID of the finding (WebAppVuln, WebApplg, or WebAppSensitiveContent).
uniqueId	(value) The 36-bit unique id assigned to the finding.  For example:  <Finding> <id>132990</id> <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId> <qid>150004</qid> ...</td>
new severity	(integer) {1,2,3,4,5}

level

comments (text) User comments.

## Sample - Edit severity level

Edit severity for single finding.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/editSeverity/was/finding/"  
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <Finding>  
      <id>647</id>  
      <severityComment>Test comment API</severityComment>  
      <severity>2</severity>  
    </Finding>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/finding.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Finding>  
      <id>647</id>  
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>  
    </Finding>  
  </data>  
</ServiceResponse>
```

## Sample - Edit severity for multiple findings

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/editSeverity/was/finding/"  
< file.xml  
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>  
  <data>  
    <Finding>  
      <severityComment>test comment api</severityComment>  
      <severity>2</severity>  
    </Finding>  
  </data>  
  <filters>  
    <Criteria field="id" operator="IN">183, 645</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/finding.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>2</count>  
  <data>  
    <Finding>  
      <id>645</id>  
      <uniqueId>6a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>  
    </Finding>  
    <Finding>  
      <id>183</id>  
      <uniqueId>5a2c4d31-5d28-2b92-e055-4943720a51ab</uniqueId>  
    </Finding>  
  </data>  
</ServiceResponse>
```

## Sample - Edit severity of a finding using uniqueId

As every uniqueId is unique, using uniqueId, you could edit the severity of a finding.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/editSeverity/was/finding/"
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <Finding>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
      <severityComment>Test comment API</severityComment>
      <severity>3</severity>
    </Finding>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>132990</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>
</ServiceResponse>
```

### XSD

[platform API server](http://platform API server/qps/xsd/3.0/was/finding.xsd)/qps/xsd/3.0/was/finding.xsd

## Restore Findings Severity

/qps/rest/3.0/restoreSeverity/was/finding

/qps/rest/3.0/restoreSeverity/was/finding/<id>

[POST]

Restore severity level of the given findings.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Ignore Vulnerabilities" permission. User must have access to web application which belongs to given WebAppVuln id. The output includes findings for web applications in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies a finding (WebAppVuln, WebApplg, or WebAppSensitiveContent).

[Click here for available operators](#)

### Sample - Restore severity level

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"qualysapi.qualys.com/qps/rest/3.0/restoreSeverity/was/finding"
```

#### Request POST data

```
<ServiceRequest>  
  <data>  
    <Finding>  
      <id>6034</id>  
    </Finding>  
  </data>  
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>6034</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>
</ServiceResponse>
```

**Sample - Restore for multiple findings****API request**

```
curl -n -u "USERNAME:PASSWORD"
"qualysapi.qualys.com/qps/rest/3.0/restoreSeverity/was/finding"
```

**Request POST data**

```
<ServiceRequest>
  <filters>
    <Criteria field="id" operator="IN">645,183</Criteria>
  </filters>
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>2</count>
  <data>
    <Finding>
      <id>645</id>
      <uniqueId>6a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
    <Finding>
```

```

        <id>183</id>
        <uniqueId>5a2c4d31-5d28-2b92-e055-4943720a51ab</uniqueId>
    </Finding>
</data>
</ServiceResponse>

```

## Sample - Restore severity of a finding using uniqueId

As every uniqueId is unique, you could restore the severity of specific finding.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/editSeverity/was/finding/"
< file.xml

```

Note: "file.xml" contains the request POST data.

### Request POST data

```

<ServiceRequest>
  <data>
    <Finding>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
      <severityComment>Restoring default
severity</severityComment>
      <severity>3</severity>
    </Finding>
  </data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>132990</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>

```

```
</ServiceResponse>
```

## XSD

<platform API server>/qps/xsd/3.0/was/finding.xsd

## Retest Findings

`/qps/rest/3.0/retest/was/finding`

`/qps/rest/3.0/retest/was/finding/<id>`

[POST]

You can now easily retest the findings for individual vulnerabilities using Finding API to test the selected finding. Only potential vulnerabilities, confirmed vulnerabilities and sensitive contents are available for retest.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "WAS.VULN.RETEST" permission. The output includes findings for web applications in the user's scope.

### Input Parameters

The element "id" (integer) is required, where "id" identifies a finding (WebAppVuln, WebAppIlg, or WebAppSensitiveContent).

[Click here for available operators](#)

### Sample - Retest Finding using XML Request

#### API request

```
curl -n -u "USERNAME:PASSWORD"  
"qualysapi.qualys.com/qps/rest/3.0/retest/was/finding"
```

#### Request POST data

```
<ServiceRequest>  
  <data>  
    <Finding>  
      <id>1728792</id>  
    </Finding>  
  </data>  
</ServiceRequest>
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/portal-
api/xsd/3.0/was/finding.xsd" >
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>1728792</id>
      <uniqueId>2a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>
</ServiceResponse>
```

**Sample - Using Finding ID****API request**

```
curl -n -u "USERNAME:PASSWORD"
"qualysapi.qualys.com/qps/rest/3.0/retest/was/finding/1728792"
```

**XML response**

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/portal-
api/xsd/3.0/was/finding.xsd"
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>1728792</id>
      <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>
    </Finding>
  </data>
</ServiceResponse>
```

**Sample - Retest a finding using uniqueId****API request**

```
curl -n -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/retest/was/finding/8a2c4d51-6d28-2b92-e053-2943720a74ab"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse  
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">  
  xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/portal-  
api/xsd/3.0/was/finding.xsd"  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <Finding><id>1728792</id></Finding>  
    <uniqueId>8a2c4d51-6d28-2b92-e053-2943720a74ab</uniqueId>  
  </data>  
</ServiceResponse>
```

### XSD

[platform API server](http://platform-api-server/qps/xsd/3.0/was/finding.xsd)/qps/xsd/3.0/was/finding.xsd

## Retrieve Finding Retest Status

`/qps/rest/3.0/retestStatus/was/finding/{id}`

[POST]

Retrieves the retest status for a finding. You can use the retest status to automate the scanning and retesting processes. The API returns one of these statuses: NO\_RETEST, UNDER\_RETEST, RETESTED, CANCELING, and CANCELED.

Permissions required - You must have the WAS module enabled. You must have the "API access" and "Access WAS module" permissions. You must have the View permission.

### Input Parameters

The API supports POST method. The Input parameters are id or uniqueId. We support optional filters that are available for the Search Finding API.

Parameter	Description
id	(integer) ID of the finding (WebAppVuln or WebAppSensitiveContent).
uniqueId	(value) The 36-bit unique id assigned to the finding.

### Sample - Retrieve retest status for a finding

Let us retrieve the retest status of a finding with ID 2730074.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" "https://qualysapi.qualys.com/qps/rest/3.0/retestStatus/was/finding/2730074"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/finding.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Finding>
      <id>2774812</id>
      <uniqueId>af45db08-80c6-4527-a48a-9759450b21a2</uniqueId>
      <retest>
        <retestStatus>RETESTED</retestStatus>
        <retestedDate>2020-10-30T09:03:11Z</retestedDate>
        <findingStatus>Finding has been
detected</findingStatus>
        <reason>Finding was confirmed</reason>
      </retest>
    </Finding>
  </data>
</ServiceResponse>
```

## WAS Findings in XML Report

Findings in all WAS reports in XML format are Base64 encoded starting with version 3.1. Findings include vulnerability detections, information gathered and sensitive content.

Did you build clients using WAS version 3.0 or earlier? If yes, please update your clients so that WAS findings data is processed accurately.

Tell me about Base64 encoded findings

All findings reported for scan and web applications are base64 encoded in XML. This includes:

- Actual contents of the response
- If evidence in response is highlighted, the evidence contents
- Information gathered data

Base64 encoded data usually will have the attribute set to “base64=true”. For example:

```
<FINDING>
  <PAYLOAD><![CDATA[uid=%00%3Cscript%3E_q%3Drandom(X157105156Y1Z)%3C%2
Fscript
%3E]]></PAYLOAD>
  <RESULT base64="true"><![CDATA[C19mZWVkKCgKCgpbCiI=]]></RESULT>
</FINDING>
```

If the “base64=true attribute” is not set, the value will be in plain text. For example:

```
<FINDING>
  <PAYLOAD><![CDATA[uid=%00%3Cscript%3E_q%3Drandom(X157105156Y1Z)%3C%2
Fscript
%3E]]></PAYLOAD>
  <RESULT><![CDATA[_feed((")]]></RESULT>
</FINDING>
```

Which WAS reports show findings?

- WAS v3 Scan Results
- Web Application Report

- Web Application Scan Report

WAS v3 Scan Results

**Vulnerability and Sensitive Content findings**

WasScan/vulns/list/WasScanVuln/instances/list/WasScanVulnInstance/  
payloads/list/WasScanVulnPayload/result

WasScan/sensitiveContents/list/WasScanSensitiveContent/  
instances/list/ WasScanSensitiveContentInstance/payloads/list/  
WasScanSensitiveContentPayload/result

**Sample WAS v3 Scan Results XML**

```
<WasScanVuln>
  <qid>150001</qid>
  <title><![CDATA[Reflected Cross-Site Scripting (XSS)
Vulnerabilities]]></title>
  <uri><![CDATA[http://myuri.apps.com/613460625329/feed.gtl?uid=%22'%3E
%3Cqss%20a%3DX157
105156Y1Z%3E]]></uri>
  <param>uid</param>
  <instances>
    <count>1</count>
    <list>
      <WasScanVulnInstance>
        <authenticated>>false</authenticated>
        <payloads>
          <count>4</count>
          <list>
            <WasScanVulnPayload>
              <payload><![CDATA[uid=%00%3Cscript%3E_q%3Drandom(X157105156
Y1Z)%3C%2Fscript%3E]]>
              </payload>
              <result base64="true">
<![CDATA[C19mZWVkkKCgKCgpbCiI]]></result>
              </WasScanVulnPayload>
              <WasScanVulnPayload>
                <payload><![CDATA[uid=%22'%3E%3Cqss%20a%3DX157105156Y1Z%3E
]]></payload>
```

```

    <result base64="true">
      <![CDATA[C19mZWVkkCgKCgpbCiIiJyZndDsmbHQ7cXNzIGE9WDE1NzEwNT
E1NlkkxWiZndDsiCgpdCgoKCikpCg]]></result>
    </WasScanVulnPayload>
    <WasScanVulnPayload>
      <payload><![CDATA[uid=%00%3Cscript%3E_q%3Drandom(X157201836
Y1Z)%3C%2Fscript%3E]]>
    </payload>
    <result
base64="true"><![CDATA[C19mZWVkkCgKCgpbCiI]]></result>
    </WasScanVulnPayload>
    <WasScanVulnPayload>
      <payload><![CDATA[uid=%22'%3E%3Cqss%20a%3DX157201836Y1Z%3E
]]></payload>
    <result base64="true">
      <![CDATA[C19mZWVkkCgKCgpbCiIiJyZndDsmbHQ7cXNzIGE9WDE1NzIwMT
gzNlkkxWiZndDsiCgpdCgoKCikpCg]]></result>
    </WasScanVulnPayload>
  </list>
</payloads>
</WasScanVulnInstance>
</list>
</instances>
</WasScanVuln>

```

### Information Gathered findings

WasScan/igs/list/WasScanIlg/data

### Sample WAS v3 Scan Results XML

```

<INFO>
  <QID>150044</QID>
  <TITLE><![CDATA[Login Form Is Not Submitted Via HTTPS]]></TITLE>
  <RESULT base64="true">
<![CDATA[RGVmYXVsdCBmb3JtIGFjdGlvbiBkb2VzIG5vdCBzdWJtaXQgdmIhIFNTTDoga
HR0cDovL2dub2ds
ZS1ncnV5ZXJlLmFwcHNwb3QuY29tLzYxMzQ2MDYyNTMyOS9sb2dpbgo= ]]></RESULT>
</INFO>

```

## Vulnerability and Sensitive Content findings

WAS\_WEBAPP\_REPORT/RESULTS/WEB\_APPLICATION/VULNERABILITY\_LIST/  
/VULNERABILITY/PAYLOADS/PAYLOAD/RESPONSE/CONTENTS

WAS\_WEBAPP\_REPORT/RESULTS/WEB\_APPLICATION/SENSITIVE\_CONTENT\_LIST/  
SENSITIVE\_CONTENT/PAYLOADS/PAYLOAD/RESPONSE/CONTENTS

WAS\_WEBAPP\_REPORT/RESULTS/WEB\_APPLICATION/VULNERABILITY\_LIST/  
VULNERABILITY/PAYLOADS/PAYLOAD/RESPONSE/EVIDENCE

WAS\_WEBAPP\_REPORT/RESULTS/WEB\_APPLICATION/SENSITIVE\_CONTENT\_LIST/  
SENSITIVE\_CONTENT/PAYLOADS/PAYLOAD/RESPONSE/EVIDENCE

## Sample WAS v3 Scan Results XML

```
<VULNERABILITY>
  <ID>5943</ID>
  <QID>150001</QID>
<URL><![CDATA[http://myuri.apps.com/app/xss/0/1/0/xss.php?s='%20onEvent%3dX146470180Y1Z%20']]></URL>
  <PARAM><![CDATA[s]]></PARAM>
  <AUTHENTICATION>Not Required</AUTHENTICATION>
  <STATUS>NEW</STATUS>
  <FIRST_TIME_DETECTED>2011-12-30T09:57:39Z</FIRST_TIME_DETECTED>
  <LAST_TIME_DETECTED>2011-12-30T09:57:39Z</LAST_TIME_DETECTED>
  <LAST_TIME_TESTED>2011-12-30T09:57:39Z</LAST_TIME_TESTED>
  <TIMES_DETECTED>1</TIMES_DETECTED>
  <PAYLOADS>
    <PAYLOAD>
      <NUM>1</NUM>
      <PAYLOAD><![CDATA[s='%20onEvent%3dX146470180Y1Z%20']]></PAYLOAD>
      <REQUEST/>
      <RESPONSE>
        <CONTENTS
base64="true"><![CDATA[bGQiJmd0OyZsdDsmBHQ7L3NwYW4mZ3Q7ID0mZ3Q7ICZsdDt
zcGFuIGNsYXNzPSJib2xkIiZndDsmYW1wO2x0OyZsdDsv3BhbiZndDsmBHQ7YnImZ3Q7C
iZsdDsvZG12Jmd0wombHQ7L2RpdjZndDskJmx002JyJmd0wombHQ7ZG12IGNsYXNzPSJ
wYX1sb2FkcyImZ3Q7Ck91dHB1dCBmcm9tIHJlcXVlc3QgJmx003NwYW4gY2xhc3M9ImJvb
GQiJmd0Oy9jYXNzaXVtL3hzcj5waHA/dmFyaWFudD0wJmFtcDtxcz0xJmFtcDtmPTAmYW1
wO3M9JyUyMG9uRXZlbnQlM2RYMTQ2NDcwMTgwWTFaJTIwJmX0Oy9zcGFuJmd0wombHQ7Y
nImZ3Q7CiZsdDthIGhyZWY9J1wnIG9uRXZlbnQ9WDE0NjQ3MDE4MFkxWiAnJmd003NhbXB
```

```
sZSBsaW5rJmx0Oy9hJmd0OwombHQ7L2RpdizNdDsKJmx003NjcmldwCZndDttYwluKCkmb
HQ7L3NjcmldwCZndDsKJmx00y9ib2R5Jmd0OwombHQ7L2h0bwWmZ3Q7]]></CONTENTS>
</RESPONSE>
</PAYLOAD>
</PAYLOADS>
<IGNORED>false</IGNORED>
</VULNERABILITY>
```

### Information Gathered findings

WAS\_WEBAPP\_REPORT/RESULTS/WEB\_APPLICATION/  
INFORMATION\_GATHERED\_LIST/ INFORMATION\_GATHERED/DATA

```
<INFORMATION_GATHERED_LIST>
  <INFORMATION_GATHERED>
    <ID>1529</ID>
    <QID>6</QID>
    <FIRST_TIME_DETECTED>2011-12-30T09:57:39Z</FIRST_TIME_DETECTED>
    <LAST_TIME_DETECTED>2011-12-30T09:57:39Z</LAST_TIME_DETECTED>
    <LAST_TIME_TESTED>2011-12-30T09:57:39Z</LAST_TIME_TESTED>
  <DATA
base64="true"><![CDATA[I3RhYmxlCk1QX2FkZHJlc3MgSG9zdF9uYW1lCgoxMC4xMC4
yNi43NyBmdW5reXRvd24udnVsbi5x
YS5xdWFseXMuY29tCg==]]></DATA>
  </INFORMATION_GATHERED>
  <INFORMATION_GATHERED>
    <ID>1532</ID>
    <QID>150031</QID>
    <FIRST_TIME_DETECTED>2011-12-30T09:57:39Z</FIRST_TIME_DETECTED>
    <LAST_TIME_DETECTED>2011-12-30T09:57:39Z</LAST_TIME_DETECTED>
    <LAST_TIME_TESTED>2011-12-30T09:57:39Z</LAST_TIME_TESTED>
  <DATA
base64="true"><![CDATA[VGltZW91dCB5ZWFjaGVkIGluIElQOyBjb25uZWNoaW9uIHR
vIFdlYktpdC4gSmF
2YVNjcmldwCBz
dXBwb3J0IGRpc2FibGVkIGluOmVQaGFzZUNyYXdsCkNyYXdsIGNvbXBsZXRlZCB3aXRoIF
dlYktpdC4K]]></DATA>
  </INFORMATION_GATHERED>
```

### Vulnerability and Sensitive Content findings

WAS\_SCAN\_REPORT/RESULTS/VULNERABILITY\_LIST/VULNERABILITY/  
PAYLOADS/PAYLOAD/RESPONSE/CONTENTS

WAS\_SCAN\_REPORT/RESULTS/SENSITIVE\_CONTENT\_LIST/  
SENSITIVE\_CONTENT/PAYLOADS/PAYLOAD/RESPONSE/CONTENTS

WAS\_SCAN\_REPORT/RESULTS/VULNERABILITY\_LIST/VULNERABILITY/  
PAYLOADS/PAYLOAD/RESPONSE/EVIDENCE

WAS\_SCAN\_REPORT/RESULTS/SENSITIVE\_CONTENT\_LIST/  
SENSITIVE\_CONTENT/PAYLOADS/PAYLOAD/RESPONSE/EVIDENCE

### Information Gathered findings

WAS\_SCAN\_REPORT/RESULTS/INFORMATION\_GATHERED\_LIST/  
INFORMATION\_GATHERED/DATA

## Reference: Findings

The <OptionProfile> element includes sub elements used to define an option profile. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) ID of the finding (WebAppVuln, WebApplg, or WebAppSensitiveContent).
uniqueId	(value) The 36-bit unique id assigned to the finding.  For example:  <pre>&lt;Finding&gt;   &lt;id&gt;132990&lt;/id&gt;   &lt;uniqueId&gt;8a2c4d51-6d28-2b92-e053-2943720a74ab&lt;/uniqueId&gt;   &lt;qid&gt;150004&lt;/qid&gt;   ...</pre>
qid	(integer) Qualys ID assigned to the detection.
name	(text) Name of the detection finding.
type	(keyword) Type of the finding: VULNERABILITY, SENSITIVE_CONTENT, or INFORMATION_GATHERED.
url	(text) URL of the web application on which the finding was detected.
webApp.tags.id	(integer) ID of the tag associated with the web application on which the finding was detected.
webApp.tags.name	(text) Name of the tag associated with the web application on which the finding was detected.

status	(keyword) Status of the finding: NEW, ACTIVE, REOPENED, PROTECTED and FIXED.
patch	(integer-long) Use WAF to protect against vulnerabilities by installing virtual patches.
webApp.id	(integer) ID of the web application on which the finding was detected.
webApp.name	(text) Name of the web application on which the finding was detected.
severity	(integer) Severity of the finding.
externalRef	(string) Tip - Use operator IS EMPTY for findings with empty external references.
ignoredDate	(date) The date on which the finding was marked to ignore.
ignoredReason	(keyword) The reason for which the finding is ignored: FALSE_POSITIVE, RISK_ACCEPTED or NOT_APPLICABLE
group	(keyword) XSS, SQL, INFO, PATH, CC, SSN_US or CUSTOM
owasp.name	(text) Name of the OWASP vulnerability.
owasp.code	(integer) Code associated with the OWASP vulnerability
wasc.name	(text) Name of the vulnerability.
wasc.code	(integer) Code of the vulnerability.
cwe.id	(integer) ID associated with CWE.
firstDetectedDate	(date) The date when the finding was first detected in the web application.

*Qualys Web Application Scanning API*  
*Findings*

lastDetectedDate (date) The date when the finding was last detected in the web application.

lastTestedDate (date) The date when the finding was last tested in the web application.

timesDetected (integer) The count indicating the number of times the finding was detected.

severity level (integer) The severity associated with the finding:1,2,3,4,5

# Configuration

## Option Profiles

### Option Profile Count

`/qps/rest/3.0/count/was/optionprofile`

[GET] [POST]

Returns the total number of option profiles in the user's scope. Input elements are optional and are used to filter the number of option profiles included in the count.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The count includes web applications in the user's scope.

#### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the option profile.
name	(text) The name given to the option profile.
tags	Filter by tags applied.
tags.id	(integer) ID of the tag assigned to option profile.
tags.name	(text) Tag name assigned to option profile.

createdDate	(date) The date when the option profile was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the option profile was updated in WAS, in UTC date/time format.
usedByWebApps	(boolean) Web applications used/not used by the option profile.
usedBySchedules	(boolean) Scan schedules used/not used by the option profile.
owner.id	(Long with operator: EQUALS, IN, NOT EQUALS, GREATER or LESSER) ID of the owner who created the option profile.
owner.name	(text) Full name of the user who created the option profile.
owner.username	(text) Username of the owner who created the option profile. (like user_ab3).

Sample - Count - no criteria (GET)

#### API request

```
curl -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/optionprofile/"
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>30</count>  
</ServiceResponse>
```

Sample - Count - criteria (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/optionprofile/" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="id"  
operator="IN">832265669,832295669,832285669</Criteria>  
    <Criteria field="name" operator="CONTAINS">OP</Criteria>  
    <Criteria field="tags" operator="NONE"></Criteria>  
    <Criteria field="createdDate" operator="LESSER">2017-09-  
09</Criteria>  
    <Criteria field="updatedDate" operator="LESSER">2017-09-  
09</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
</ServiceResponse>
```

XSD

[<platform API server>/qps/xsd/3.0/was/optionprofile.xsd](#)

## Search Option Profiles

`/qps/rest/3.0/search/was/optionprofile`

[POST]

Returns a list of option profiles which are in the user's scope. Action logs are not included in the output.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The Output includes option profiles in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the option profile.
name	(text) The name given to the option profile.
tags	Filter by tags applied.
tags.id	(integer) ID of the tag assigned to option profile.
tags.name	(text) Tag name assigned to option profile.
createdDate	(date) The date when the option profile was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the option profile was updated in WAS, in UTC date/time format.
usedByWebApps	(boolean) Web applications used/not used by the

option profile.

usedBySchedules	(boolean) Scan schedules used/not used by the option profile.
-----------------	---

owner.id	(Long with operator: EQUALS, IN, NOT EQUALS, GREATER or LESSER) ID of the owner who created the option profile.
----------	---

owner.name	(text) Full name of the user who created the option profile.
------------	--

owner.username	(text) Username of the owner who created the option profile. (like user_ab3).
----------------	---

Sample - Search - criteria (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/search/was/optionprofile/"  
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="id"  
operator="IN">832265669,832295669,832285669</Criteria>  
      <Criteria field="name" operator="CONTAINS">OP</Criteria>  
      <Criteria field="tags" operator="NONE"></Criteria>  
      <Criteria field="createdDate" operator="LESSER">2017-09-  
09</Criteria>  
      <Criteria field="updatedDate" operator="LESSER">2017-09-  
09</Criteria>  
    </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <hasMoreRecords>>false</hasMoreRecords>
  <data>
    <OptionProfile>
      <id>832285669</id>
      <name><![CDATA[My Option Profile]]></name>
      <owner>
        <id>8792415669</id>
        <username>user_ww</username>
        <firstName><![CDATA[Walter]]></firstName>
        <lastName><![CDATA[White]]></lastName>
      </owner>
      <tags>
        <count>0</count>
      </tags>
      <createdDate>2017-09-08T23:16:07Z</createdDate>
      <updatedAt>2017-09-08T23:16:07Z</updatedAt>
    </OptionProfile>
  </data>
</ServiceResponse>
```

XSD

[platform API server](http://platform API server/qps/xsd/3.0/was/optionprofile.xsd)/qps/xsd/3.0/was/optionprofile.xsd

## Get Option Profile Details

/qps/rest/3.0/get/was/optionprofile/<id>

[GET]

View details for an option profile which is in the user's scope. See "[Search option profiles](#)" to find a record ID to use as input.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The Output includes option profiles in the user's scope.

Input Parameters

The element "id" (integer) is required, where "id" identifies an option profile.

[Click here for available operators](#)

Samples

[Sample - Get details of an option profile \(GET\)](#)

[Sample - Get details on option profile with SmartScan enabled \(GET\)](#)

[Sample - View details to know if action URI is enabled](#)

[Sample - Get details of an Option Profile with customized scan intensity \(GET\)](#)

[Sample - Get details of an option profile with enhanced crawling enabled \(GET\)](#)

[Sample - Get details of an option profile to know the detection scope \(GET\)](#)

---

Sample - Get details of an option profile (GET)

**API request**

```
curl -u "USERNAME:PASSWORD"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/optionprofile/832265669"
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <OptionProfile>  
      <id>832265669</id>  
      <name><![CDATA[My Option Profile]]></name>  
      <owner>  
        <id>8792415669</id>  
        <username>user_walter</username>  
        <firstName><![CDATA[Walter]]></firstName>  
        <lastName><![CDATA[White]]></lastName>  
      </owner>  
      <isDefault>>false</isDefault>  
      <tags>  
        <count>0</count>  
      </tags>  
      <formSubmission>BOTH</formSubmission>  
      <maxCrawlRequests>300</maxCrawlRequests>  
      <timeoutErrorThreshold>200</timeoutErrorThreshold>  
      <unexpectedErrorThreshold>20</unexpectedErrorThreshold>  
      <parameterSet>  
        <id>0</id>  
        <name><![CDATA[Initial Parameters]]></name>  
      </parameterSet>  
      <ignoreBinaryFiles>>false</ignoreBinaryFiles>  
      <performance>LOW</performance>  
      <bruteforceOption>MINIMAL</bruteforceOption>  
      <comments>  
        <count>2</count>  
        <list>  
          <Comment>  
            <contents><![CDATA[some comments]]></contents>  
            <author>  
              <id>200639085669</id>  
              <username>user_walter</username>
```

```
    </author>
  </Comment>
  <Comment>
    <contents><![CDATA[some more comments]]></contents>
    <author>
      <id>200639085669</id>
      <username>user_walter</username>
    </author>
  </Comment>
</list>
</comments>
<sensitiveContent>
  <creditCardNumber>>false</creditCardNumber>
  <socialSecurityNumber>>false</socialSecurityNumber>
</sensitiveContent>
<createdDate>2017-09-08T22:03:01Z</createdDate>
<createdBy>
  <id>8792415669</id>
  <username>user_walter</username>
  <firstName><![CDATA[Walter]]></firstName>
  <lastName><![CDATA[White]]></lastName>
</createdBy>
<updatedAt>2017-09-08T23:18:28Z</updatedAt>
<updatedBy>
  <id>8792415669</id>
  <username>user_walter</username>
  <firstName><![CDATA[Walter]]></firstName>
  <lastName><![CDATA[White]]></lastName>
</updatedBy>
</OptionProfile>
</data>
</ServiceResponse>
```

Sample - Get details on option profile with SmartScan enabled (GET)

Want to use SmartScan? This feature must be enabled for your subscription. We can help you with this quickly - just contact your Technical Account Manager or Qualys Support.

#### API request

```
curl -u "USERNAME:PASSWORD"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/optionprofile/46733
3"
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>467333</id>
      <name>
        <![CDATA[My Option Profile]]>
      </name>
      <owner>
        <id>4354</id>
        <username>user_aril</username>
        <firstName>
          <![CDATA[Ari]]>
        </firstName>
        <lastName>
          <![CDATA[Smith]]>
        </lastName>
      </owner>
      <isDefault>>false</isDefault>
      <tags>
        <count>0</count>
      </tags>
      <formSubmission>BOTH</formSubmission>
      <maxCrawlRequests>300</maxCrawlRequests>
      <timeoutErrorThreshold>100</timeoutErrorThreshold>
      <unexpectedErrorThreshold>300</unexpectedErrorThreshold>
      <parameterSet>
        <id>15601</id>
        <name>
          <![CDATA[Test Paramset]]>
        </name>
      </parameterSet>
      <ignoreBinaryFiles>>false</ignoreBinaryFiles>
      <smartScanSupport>>true</smartScanSupport>
      <smartScanDepth>10</smartScanDepth>
      <performance>LOW</performance>
      <bruteforceOption>MINIMAL</bruteforceOption>
      <comments>
        <count>0</count>
      </comments>
    </OptionProfile>
  </data>
</ServiceResponse>
```

```
<sensitiveContent>
  <creditCardNumber>>false</creditCardNumber>
  <socialSecurityNumber>>false</socialSecurityNumber>
</sensitiveContent>
<createdDate>2017-03-23T21:15:47Z</createdDate>
<createdBy>
  <id>4354</id>
  <username>user_aril</username>
  <firstName>
    <![CDATA[Ari]]>
  </firstName>
  <lastName>
    <![CDATA[Smith]]>
  </lastName>
</createdBy>
<updatedAt>2017-03-23T21:15:47Z</updatedAt>
<updatedBy>
  <id>4354</id>
  <username>user_aril</username>
  <firstName>
    <![CDATA[Ari]]>
  </firstName>
  <lastName>
    <![CDATA[Smith]]>
  </lastName>
</updatedBy>
</OptionProfile>
</data>
</ServiceResponse>
```

Sample - View details to know if action URI is enabled

Example: View the option profile details for the web application with ID #171683 to check if action URI is enabled or disabled.

### API request

```
curl -u "USERNAME:PASSWORD" " -X GET -H "Content-type: text/xml"
"https://qualysapi.qualys.com/portal-
api/rest/3.0/get/was/optionprofile/176683"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/portal-
api/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>176683</id>
      <name>
        <![CDATA[My Option Profile - with action URI]]>
      </name>
      <owner>
        <id>336390</id>
        <username>john_doe</username>
        <firstName>
          <![CDATA[John]]>
        </firstName>
        <lastName>
          <![CDATA[Doe]]>
        </lastName>
      </owner>
      <isDefault>>false</isDefault>
      <tags>
        <count>0</count>
      </tags>
      <formSubmission>BOTH</formSubmission>
      <maxCrawlRequests>200</maxCrawlRequests>
      <timeoutErrorThreshold>22</timeoutErrorThreshold>
      <unexpectedErrorThreshold>50</unexpectedErrorThreshold>
      <userAgent>
        <![CDATA[Mozilla/5.0 (Windows NT 6.2;
WOW64)AppleWebKit
          /537.36 (KHTML, like Gecko) Chrome/27.0.1453.116
          Safari/537.36]]>
      </userAgent>
      <parameterSet>
        <id>0</id>
        <name>
          <![CDATA[Initial Parameters]]>
        </name>
      </parameterSet>
      <ignoreBinaryFiles>>true</ignoreBinaryFiles>
      <includeActionUriInFormId>>true</includeActionUriInFormId>
      <smartScanSupport>>false</smartScanSupport>
      <performance>LOW</performance>
    </OptionProfile>
  </data>
</ServiceResponse>

```

```
<bruteforceOption>DISABLED</bruteforceOption>
<comments>
  <count>1</count>
  <list>
    <Comment>
      <contents>
        <![CDATA[User Comment]]>
      </contents>
      <createdDate>2017-11-
18T15:59:55Z</createdDate>
    </Comment>
  </list>
</comments>
...
</OptionProfile>
</data>
</ServiceResponse>
```

Sample - Get details of an Option Profile with customized scan intensity (GET)

Let us get details of an Option Profile with customized scan intensity.

### API request

```
curl -u "USERNAME:PASSWORD" " -X GET -H "Content-type: text/xml"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/optionprofile/1608560"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>1608560</id>
      <name>
        <![CDATA[Update Option Profile with Custom Scan
Intensity]]>
      </name>
    </OptionProfile>
  </data>
  ...
</ServiceResponse>
```

```
<smartScanSupport>false</smartScanSupport>
<customPerformance>
  <numOfHttpThreads>10</numOfHttpThreads>
  <delayBetweenRequests>20</delayBetweenRequests>
</customPerformance>
<bruteforceOption>MINIMAL</bruteforceOption>
...
</OptionProfile>
</data>
</ServiceResponse>
```

Sample - Get details of an option profile with enhanced crawling enabled (GET)

### API request

```
curl -u "USERNAME:PASSWORD" " -X GET -H "Content-type: text/xml"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/optionprofile/77683"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>77683</id>
      <name>
        <![CDATA[Sample Option Profile]]>
      </name>
      <owner>
        <id>337590</id>
        <username>user_john</username>
        <firstName>
          <![CDATA[John]]>
        </firstName>
        <lastName>
          <![CDATA[Doe]]>
        </lastName>
      </owner>
      <isDefault>>false</isDefault>
```

```
<tags>
  <count>0</count>
</tags>
<formSubmission>BOTH</formSubmission>
<maxCrawlRequests>300</maxCrawlRequests>
<timeoutErrorThreshold>100</timeoutErrorThreshold>
<unexpectedErrorThreshold>300</unexpectedErrorThreshold>
<parameterSet>
  <id>0</id>
  <name>
    <![CDATA[Initial Parameters]]>
  </name>
</parameterSet>
<ignoreBinaryFiles>>false</ignoreBinaryFiles>
<includeActionUriInFormId>>false</includeActionUriInFormId>
<enhancedCrawling>>true</enhancedCrawling>
<smartScanSupport>>false</smartScanSupport>
  ...
</OptionProfile>
</data>
</ServiceResponse>
```

Sample - Get details of an option profile to know the detection scope (GET)

### API request

```
curl -u "USERNAME:PASSWORD" " -X GET -H "Content-type: text/xml"
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/optionprofile/77683"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>77683</id>
      <name>
        <![CDATA[Sample Option Profile]]>
      </name>
      <owner>
```

```
<id>337590</id>
<username>user_john</username>
<firstName><![CDATA[John]]></firstName>
<lastName><![CDATA[Doe]]></lastName>
</owner>
<isDefault>>false</isDefault>
<tags>
  <count>0</count>
</tags>
<formSubmission>BOTH</formSubmission>
<maxCrawlRequests>1000</maxCrawlRequests>
<timeoutErrorThreshold>100</timeoutErrorThreshold>
<unexpectedErrorThreshold>300</unexpectedErrorThreshold>
<parameterSet>
  <id>0</id>
  <name>
    <![CDATA[Initial Parameters]]>
  </name>
</parameterSet>
<ignoreBinaryFiles>>true</ignoreBinaryFiles>
<includeActionUriInFormId>>false</includeActionUriInFormId>
<enhancedCrawling>>false</enhancedCrawling>
<smartScanSupport>>true</smartScanSupport>
<smartScanDepth>5</smartScanDepth>
<performance>LOW</performance>
<bruteforceOption>MINIMAL</bruteforceOption>
<detection>
  <detectionScope>EVERYTHING</detectionScope>
</detection>
<comments>
  <count>0</count>
</comments>
  ...
</updatedBy>
</OptionProfile>
</data>
</ServiceResponse>
```

XSD

[platform API server/qps/xsd/3.0/was/optionprofile.xsd](http://platform API server/qps/xsd/3.0/was/optionprofile.xsd)

## Create a new Option Profile

`/qps/rest/3.0/create/was/optionprofile`

[POST]

Create a new option profile.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Create Option Profile".

Input Parameters

The element "name" (text) and "OptionProfile" is required, where "name" is option profile name.

[Click here for available operators](#)

Samples

[Create - minimum criteria \(POST\)](#)

[Create - multiple criteria \(POST\)](#)

[Create - disable error threshold values, set to 0 \(POST\)](#)

[Create - enable SmartScan \(POST\)](#)

[Create - enable action URI \(POST\)](#)

[Create - associate pre-defined detection category \(POST\)](#)

[Create an option profile with XSS Power Mode detection scope \(POST\)](#)

[Create - Enabling XSS Payloads for standard scan](#)

[Create - custom scan intensity \(POST\)](#)

[Create - Enhanced Crawling enabled \(POST\)](#)

[Create - Everything as detection scope](#)

[Create - SSL/TLS and Certificate issues](#)

Sample - Create - minimum criteria (POST)

Create a new option profile with the name “My Option Profile - with defaults”. The default option profile settings are assigned automatically.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile/"  
< file.xml
```

Note: “file.xml” contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <OptionProfile>  
      <name><![CDATA[My Option Profile - with defaults]]></name>  
    </OptionProfile>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <OptionProfile>  
      <id>832265669</id>  
      <name><![CDATA[My Option Profile - with defaults]]></name>  
      <owner>  
        <id>8792415669</id>  
        <username>user_alex</username>  
        <firstName><![CDATA[Alex]]></firstName>  
        <lastName><![CDATA[Smith]]></lastName>  
      </owner>
```

```
<isDefault>>false</isDefault>
<tags>
  <count>0</count>
</tags>
<formSubmission>BOTH</formSubmission>
<maxCrawlRequests>300</maxCrawlRequests>
<timeoutErrorThreshold>20</timeoutErrorThreshold>
<unexpectedErrorThreshold>48</unexpectedErrorThreshold>
<parameterSet>
  <id>0</id>
  <name><![CDATA[Initial Parameters]]></name>
</parameterSet>
<ignoreBinaryFiles>>false</ignoreBinaryFiles>
<performance>LOW</performance>
<bruteforceOption>MINIMAL</bruteforceOption>
<comments>
  <count>0</count>
</comments>
<sensitiveContent>
  <creditCardNumber>>false</creditCardNumber>
  <socialSecurityNumber>>false</socialSecurityNumber>
</sensitiveContent>
<createdDate>2018-09-08T22:03:01Z</createdDate>
<createdBy>
  <id>8792415669</id>
  <username>user_alex</username>
  <firstName><![CDATA[Alex]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</createdBy>
<updatedAt>2018-09-08T22:03:01Z</updatedAt>
<updatedAtBy>
  <id>8792415669</id>
  <username>user_alex</username>
  <firstName><![CDATA[Alex]]></firstName>
  <lastName><![CDATA[Smith]]></lastName>
</updatedAtBy>
</OptionProfile>
</data>
</ServiceResponse>
```

### Sample - Create - multiple criteria (POST)

Create a new option profile with the name "My Option Profile - All Fields". The "name" setting is required in the request data, other settings are optional.

## API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile/"  
< file.xml
```

Note: "file.xml" contains the request POST data.

## Request POST data

```
<ServiceRequest>  
  <data>  
    <OptionProfile>  
      <name><![CDATA[My Option Profile - All Fields]]></name>  
      <timeoutErrorThreshold>22</timeoutErrorThreshold>  
      <unexpectedErrorThreshold>50</unexpectedErrorThreshold>  
      <formSubmission>BOTH</formSubmission>  
      <maxCrawlRequests>200</maxCrawlRequests>  
      <performance>LOW</performance>  
      <bruteforceOption>USER_DEFINED</bruteforceOption>  
      <parameterSet><id>15669</id></parameterSet>  
      <isDefault>>true</isDefault>  
      <ignoreBinaryFiles>>true</ignoreBinaryFiles>  
      <userAgent><![CDATA[Mozilla/5.0 (Windows NT 6.2; WOW64)  
AppleWebKit/537.36 (KHTML, like Gecko) Chrome/27.0.1453.116  
Safari/537.36]]></userAgent>  
      <tags><set><Tag><id>75521225669</id></Tag></set></tags>  
      <sensitiveContent>  
      <customContents>zip code</customContents>  
      </sensitiveContent>  
      <comments>  
        <set>  
          <Comment>  
  
<contents><![CDATA[Some Comment]]></contents>  
          </Comment>  
        </set>  
      </comments>  
      <bruteforceList>  
        <id>74005669</id>  
      </bruteforceList>  
      <detection>  
        <includedSearchLists>  
          <set>  
            <SearchList>  
              <id>3496185669</id>
```

```
        </SearchList>
      </set>
    </includedSearchLists>
    <excludedSearchLists>
      <set>
        <SearchList>
          <id>3496175669</id>
        </SearchList>
        <SearchList>
          <id>3496165669</id>
        </SearchList>
      </set>
    </excludedSearchLists>
  </detection>
</OptionProfile>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>832275669</id>
      <name><![CDATA[My Option Profile - All Fields]]></name>
      <owner>
        <id>8792415669</id>
        <username>user_cindy</username>
        <firstName><![CDATA[Cindy]]></firstName>
        <lastName><![CDATA[Green]]></lastName>
      </owner>
      <isDefault>true</isDefault>
      <tags>
        <count>1</count>
        <list>
          <Tag>
            <id>75521225669</id>
            <name><![CDATA[Business Units]]></name>
          </Tag>
        </list>
```

```
</tags>
<formSubmission>BOTH</formSubmission>
<maxCrawlRequests>200</maxCrawlRequests>
<timeoutErrorThreshold>22</timeoutErrorThreshold>
<unexpectedErrorThreshold>50</unexpectedErrorThreshold>
<userAgent><![CDATA[Mozilla/5.0 (Windows NT 6.2; WOW64)
AppleWebKit/537.36 (KHTML, like Gecko) Chrome/27.0.1453.116
Safari/537.36]]></userAgent>
<parameterSet>
  <id>15669</id>
  <name><![CDATA[Custom Parameters]]></name>
</parameterSet>
<ignoreBinaryFiles>>true</ignoreBinaryFiles>
<performance>LOW</performance>
<bruteforceOption>USER_DEFINED</bruteforceOption>
<bruteforceList>
  <id>74005669</id>
  <name><![CDATA[BFL]]></name>
</bruteforceList>
<detection>
  <includedSearchLists>
    <count>1</count>
    <list>
      <SearchList>
        <id>3496185669</id>
      </SearchList>
    </list>
  </includedSearchLists>
  <excludedSearchLists>
    <count>2</count>
    <list>
      <SearchList>
        <id>3496175669</id>
      </SearchList>
      <SearchList>
        <id>3496165669</id>
      </SearchList>
    </list>
  </excludedSearchLists>
</detection>
<comments>
  <count>1</count>
  <list>
    <Comment>
      <contents><![CDATA[Some Comment]]></contents>
```

```
    </Comment>
  </list>
</comments>
<sensitiveContent>
  <creditCardNumber>>false</creditCardNumber>
  <socialSecurityNumber>>false</socialSecurityNumber>
  <customContents>zip code</customContents>
</sensitiveContent>
<createdDate>2017-09-08T22:31:06Z</createdDate>
<createdBy>
  <id>8792415669</id>
  <username>user_cindy</username>
  <firstName><![CDATA[Cindy]]></firstName>
  <lastName><![CDATA[Green]]></lastName>
</createdBy>
<updatedAt>2017-09-08T22:31:07Z</updatedAt>
<updatedBy>
  <id>8792415669</id>
  <username>user_cindy</username>
  <firstName><![CDATA[Cindy]]></firstName>
  <lastName><![CDATA[Green]]></lastName>
</updatedBy>
</OptionProfile>
</data>
</ServiceResponse>
```

Sample - Create - disable error threshold values, set to 0 (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--
data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile/"
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name><![CDATA[My OP - with no threshold specified]]></name>

      <timeoutErrorThreshold>0</timeoutErrorThreshold>
      <unexpectedErrorThreshold>0</unexpectedErrorThreshold>
```

```
</OptionProfile>  
</data>  
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <OptionProfile>  
      <id>453133</id>  
      <name>  
        <![CDATA[My OP - with no threshold specified]]>  
      </name>  
      <owner>  
        <id>4354</id>  
        <username>user_amy</username>  
        <firstName>  
          <![CDATA[Amy]]>  
        </firstName>  
        <lastName>  
          <![CDATA[Kim]]>  
        </lastName>  
      </owner>  
      <isDefault>>false</isDefault>  
      <tags>  
        <count>0</count>  
      </tags>  
      <formSubmission>BOTH</formSubmission>  
      <maxCrawlRequests>300</maxCrawlRequests>  
      <parameterSet>  
        <id>0</id>  
        <name>  
          <![CDATA[Initial Parameters]]>  
        </name>  
      </parameterSet>  
      <ignoreBinaryFiles>>false</ignoreBinaryFiles>  
      <performance>LOW</performance>  
      <bruteforceOption>MINIMAL</bruteforceOption>  
      <comments>  
        <count>0</count>
```

```
</comments>  
<sensitiveContent>  
  <creditCardNumber>>false</creditCardNumber>  
  <socialSecurityNumber>>false</socialSecurityNumber>  
</sensitiveContent>  
<createdDate>2017-11-07T01:29:24Z</createdDate>  
<createdBy>
```

...

Sample - Create - enable SmartScan (POST)

Want to use SmartScan? This feature must be enabled for your subscription. We can help you with this quickly - just contact your Technical Account Manager or Qualys Support.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile/"  
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <OptionProfile>  
      <name>My Option Profile</name>  
      <smartScanSupport>true</smartScanSupport>  
      <smartScanDepth>10</smartScanDepth>  
    </OptionProfile>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <OptionProfile>
```

```
<id>467333</id>
<name>
  <![CDATA[My Option Profile]]>
</name>
<owner>
  <id>4354</id>
  <username>user_aril</username>
  <firstName>
    <![CDATA[Ari]]>
  </firstName>
  <lastName>
    <![CDATA[Smith]]>
  </lastName>
</owner>
<isDefault>>false</isDefault>
<tags>
  <count>0</count>
</tags>
<formSubmission>BOTH</formSubmission>
<maxCrawlRequests>300</maxCrawlRequests>
<timeoutErrorThreshold>100</timeoutErrorThreshold>

<unexpectedErrorThreshold>300</unexpectedErrorThreshold>
<parameterSet>
  <id>15601</id>
  <name>
    <![CDATA[Test Paramset]]>
  </name>
</parameterSet>
<ignoreBinaryFiles>>false</ignoreBinaryFiles>
<smartScanSupport>>true</smartScanSupport>
<smartScanDepth>10</smartScanDepth>
<performance>LOW</performance>
<bruteforceOption>MINIMAL</bruteforceOption>>
```

...

Sample - Create - enable action URI (POST)

Create a new option profile with the name “My Option Profile” to include action URI. The default option profile settings are assigned automatically.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST"--
data-binary@-
```

```
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile"
< file.xml
```

Note: "file.xml" contains the request POST data.

## Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name>
        <![CDATA[My Option Profile]]>
      </name>
      <timeoutErrorThreshold>22</timeoutErrorThreshold>
      <unexpectedErrorThreshold>50</unexpectedErrorThreshold>
      <formSubmission>BOTH</formSubmission>
      <maxCrawlRequests>200</maxCrawlRequests>
      <performance>LOW</performance>
      <bruteforceOption>DISABLED</bruteforceOption>
      <isDefault>true</isDefault>
      <ignoreBinaryFiles>true</ignoreBinaryFiles>
      <includeActionUriInFormId>true</includeActionUriInFormId>
      <userAgent>
        <![CDATA[Mozilla/5.0 (Windows NT 6.2;
WOW64)AppleWebKit/537.36
        (KHTML, like Gecko) Chrome/27.0.1453.116 Safari/537.36]]>
      </userAgent>
      <sensitiveContent>
        <customContents>zip code</customContents>
      </sensitiveContent>
      <comments>
        <set>
          <Comment>
            <contents>
              <![CDATA[This is a test comment.]]>
            </contents>
          </Comment>
        </set>
      </comments>
    </OptionProfile>
  </data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/portal-
api/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>171683</id>
      <name>
        <![CDATA[My Option Profile - with action URI]]>
      </name>
      <owner>
        <id>336390</id>
        <username>john_doe</username>
        <firstName>
          <![CDATA[John]]>
        </firstName>
        <lastName>
          <![CDATA[Doe]]>
        </lastName>
      </owner>
      <isDefault>>false</isDefault>
      <tags>
        <count>0</count>
      </tags>
      <formSubmission>BOTH</formSubmission>
      <maxCrawlRequests>200</maxCrawlRequests>
      <timeoutErrorThreshold>22</timeoutErrorThreshold>
      <unexpectedErrorThreshold>50</unexpectedErrorThreshold>
      <userAgent>
        <![CDATA[Mozilla/5.0 (Windows NT 6.2;
WOW64)AppleWebKit
          /537.36 (KHTML, like Gecko) Chrome/27.0.1453.116
          Safari/537.36
        ]]>
      </userAgent>
      <parameterSet>
        <id>0</id>
        <name>
          <![CDATA[Initial Parameters]]>
        </name>
      </parameterSet>
      <ignoreBinaryFiles>>true</ignoreBinaryFiles>
      <includeActionUriInFormId>>true</includeActionUriInFormId>
      <smartScanSupport>>false</smartScanSupport>
    </OptionProfile>
  </data>
</ServiceResponse>

```

```
<performance>LOW</performance>
<bruteforceOption>DISABLED</bruteforceOption>
<comments>
  <count>1</count>
  <list>
    <Comment>
      <contents>
        <![CDATA[User Comment]]>
      </contents>
      <createdDate>2017-11-
18T15:59:55Z</createdDate>
    </Comment>
  </list>
</comments>
<sensitiveContent>
  <creditCardNumber>>false</creditCardNumber>
  <socialSecurityNumber>>false</socialSecurityNumber>
  <customContents>zip code</customContents>
</sensitiveContent>
<createdDate>2017-11-18T15:59:49Z</createdDate>
<createdBy>
  <id>336390</id>
  <username>john_doe</username>
  <firstName>
    <![CDATA[John]]>
  </firstName>
  <lastName>
    <![CDATA[Doe]]>
  </lastName>
</createdBy>
<updatedAt>2017-11-18T15:59:49Z</updatedAt>
<updatedBy>
  <id>336390</id>
  <username>john_doe</username>
  <firstName>
    <![CDATA[John]]>
  </firstName>
  <lastName>
    <![CDATA[Doe]]>
  </lastName>
</updatedBy>
</OptionProfile>
</data>
</ServiceResponse>
```

## Sample - Create - associate pre-defined detection category

Create a new option profile and associate pre-defined detection categories with Option Profile.

Element	Description
detectionCategory={Keyword}	<p>We now support the following new detection categories in your option profile:</p> <ul style="list-style-type: none"> <li>--XSS, in request header</li> <li>--Denial of Service</li> <li>--XSS</li> <li>--Path-Related vulnerabilities</li> <li>--OWASP Top 10 (2017)</li> <li>--Authentication &amp; Session Management</li> <li>--Cross-Site Request Forgery</li> <li>--XML External Entity (XXE) vulnerabilities</li> <li>--Flash-Related vulnerabilities</li> <li>--Information Disclosure</li> <li>--SQL Injection</li> <li>--Clickjacking</li> <li>--SQL Injection, in request header</li> <li>--CMS identification (type, version, and plugins)</li> <li>--Apache vulnerabilities (Struts &amp; other)</li> </ul>

```
--Uncategorized  
  
--CMS vulnerabilities  
  
--Open Redirect
```

Note: <detectedCategories> is mutually exclusive with <includedSearchLists> and <excludedSearchLists>.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST"--  
data-binary @-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile"  
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <OptionProfile>  
      <name>sample option profile with detection category</name>  
      <detection>  
        <detectionCategories>  
          <set>  
            <DetectionCategory>  
              <name>Denial of Service</name>  
            </DetectionCategory>  
          </set>  
        </detectionCategories>  
      </detection>  
    </OptionProfile>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchemainstance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/  
/3.0/was/optionprofile.xsd">
```

```

<responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <count>1</count>
    <data>
      <OptionProfile>
        <id>305785</id>
        <name>
          <![CDATA[Sample option profile with detection
category]]>
        </name>
        <owner>
          <id>2501086</id>
          <username>user_john</username>
          <firstName><![CDATA[John]]></firstName>
          <lastName><![CDATA[Doe]]></lastName>
        </owner>
        ...
        <detection>
          <detectionCategories>
            <count>1</count>
            <set>
              <DetectionCategory>
                <id>154</id>
                <name>Denial of Service</name>
              </DetectionCategory>
            </set>
          </detectionCategories>
        </detection>
        <comments>
          <count>0</count>
        </comments>
        ...
      </OptionProfile>
    </data>
  </ServiceResponse>

```

Sample - Create an option profile with XSS Power Mode detection scope

You can execute specialized scan that performs comprehensive tests for cross-site scripting vulnerabilities using the new option profile with XSS Power Mode detection scope that we have introduced. The detection scope performs tests using the standard XSS payloads, which detect the most common instances of XSS, but also with additional payloads that can identify XSS in certain, less-common situations. Running a scan with option profile

that has XSS Power Mode detection scope will provide the best assurance that your web application is free from XSS vulnerabilities.

To launch a scan in the XSS power mode, you need to set the <xssPowerMode> element to true under <detection> element.

Note: The includedSearchLists/excludeSearchLists, detectionCategories, xssPowerMode elements are mutually exclusive elements. Thus, you can set only one of the elements. under detection element.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
databinary@-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name>Sample Option Profile With XSS</name>
      <detection>
        <xssPowerMode>true</xssPowerMode>
      </detection>
    </OptionProfile>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>1045129</id>
      <name>
        <![CDATA[Launch XSS Power Mode Scan]]>
      </name>
```

```
<owner>
  <id>412791</id>
  <username>user_john</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</owner>
<isDefault>>false</isDefault>
<tags>
  <count>0</count>
</tags>
<formSubmission>BOTH</formSubmission>
<maxCrawlRequests>300</maxCrawlRequests>
<timeoutErrorThreshold>100</timeoutErrorThreshold>
<unexpectedErrorThreshold>300</unexpectedErrorThreshold>
<parameterSet>
  <id>0</id>
  <name>
    <![CDATA[Initial Parameters]]>
  </name>
</parameterSet>
<ignoreBinaryFiles>>false</ignoreBinaryFiles>
<includeActionUriInFormId>>false</includeActionUriInFormId>
<smartScanSupport>>false</smartScanSupport>
<performance>LOW</performance>
<bruteforceOption>MINIMAL</bruteforceOption>
<detection>
  <xssPowerMode>>true</xssPowerMode>
</detection>
<comments>
  <count>0</count>
</comments>
<sensitiveContent>
  <creditCardNumber>>false</creditCardNumber>
  <socialSecurityNumber>>false</socialSecurityNumber>
</sensitiveContent>
<createdDate>2018-07-25T03:45:12Z</createdDate>
<createdBy>
  <owner>
    <id>412791</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </owner>
</createdBy>
<updatedAt>2018-07-25T03:45:12Z</updatedAt>
```

```
<updatedBy>
  <owner>
    <id>412791</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </owner>
</updatedBy>
</OptionProfile>
</data>
</ServiceResponse>
```

### Sample - Enabling XSS Payloads for standard scan

You can enable comprehensive tests for cross-site scripting vulnerabilities to be executed during our standard scan using the new parameter in option profile. The comprehensive tests includes XSS with exhaustive set of payloads including set of standard payloads. Running a scan with XSS payloads option enabled in the detection scope of standard scan will provide the best assurance that your web application is free from XSS vulnerabilities. However, enabling this option leads to significant increase in the scan time.

Element	Description
enableXssPayloads	(boolean) A flag to indicate if XSS payloads should be enabled or disabled during the scan. If the flag is set to true, comprehensive tests for cross-site scripting vulnerabilities are executed during the scan.  Example: <pre>&lt;detection&gt;   &lt;detectionScope&gt;CORE&lt;/detectionScope&gt;   &lt;enableXssPayloads&gt;true&lt;/enableXssPayloads&gt; &lt;/detection&gt;</pre>

Let us create an option profile to launch a standard scan with comprehensive tests for cross-site scripting vulnerabilities enabled.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
databinary@-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name>Sample Option Profile With XSS Payloads</name>
      <detection>
        <detectionScope>CORE</detectionScope>
        <enableXssPayloads>>true</enableXssPayloads>
      </detection>
    </OptionProfile>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>81333</id>
      <name>
        <![CDATA[Launch Scan with XSS Payloads enabled]]>
      </name>
      <owner>
        <id>412791</id>
        <username>user_john</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
      </owner>
      <isDefault>>false</isDefault>
      <tags>
        <count>0</count>
      </tags>
      <formSubmission>BOTH</formSubmission>
```

```
<maxCrawlRequests>300</maxCrawlRequests>
<timeoutErrorThreshold>100</timeoutErrorThreshold>
<unexpectedErrorThreshold>300</unexpectedErrorThreshold>
<parameterSet>
  <id>0</id>
  <name>
    <![CDATA[Initial Parameters]]>
  </name>
</parameterSet>
<ignoreBinaryFiles>false</ignoreBinaryFiles>
<includeActionUriInFormId>false</includeActionUriInFormId>
<enhancedCrawling>false</enhancedCrawling>
<smartScanSupport>false</smartScanSupport>
<performance>LOW</performance>
<bruteforceOption>MINIMAL</bruteforceOption>
<detection>
  <detectionScope>CORE</detectionScope>
  <enableXssPayloads>true</enableXssPayloads>
</detection>
<comments>
  <count>0</count>
</comments>
<sensitiveContent>
  <creditCardNumber>false</creditCardNumber>
  <socialSecurityNumber>false</socialSecurityNumber>
</sensitiveContent>
<createdDate>2019-10-04T11:11:59Z</createdDate>
<createdBy>
<owner>
  <id>412791</id>
  <username>user_john</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</owner>
</createdBy>
<updatedAt>2018-07-25T03:45:12Z</updatedAt>
<updatedBy>
  <owner>
    <id>412791</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </owner>
</updatedBy>
</OptionProfile>
```

```
</data>  
</ServiceResponse>
```

Sample - Create an option profile with custom scan intensity

You can define your custom scan intensity in the option profile and thus control the scan performance accordingly to your configured settings. Using our new parameter `<customperformance>` you can further configure the number of threads to be used to scan each host and the delay between requests.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --  
databinary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile" <  
file.xml  
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>  
<data>  
  <OptionProfile>  
    <name><![CDATA[Option Profile with Custom Scan  
Intensity]]></name>  
    <customPerformance>  
      <numOfHttpThreads>5</numOfHttpThreads>  
      <delayBetweenRequests>100</delayBetweenRequests>  
    </customPerformance>  
  </OptionProfile>  
</data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <OptionProfile>  
      <id>1608560</id>
```

```
<name>
  <![CDATA[Option Profile with Custom Scan Intensity]]>
</name>
...
<smartScanSupport>>false</smartScanSupport>
<customPerformance>
  <numOfHttpThreads>5</numOfHttpThreads>
  <delayBetweenRequests>100</delayBetweenRequests>
</customPerformance>
<bruteforceOption>MINIMAL</bruteforceOption>
...
  </OptionProfile>
</data>
</ServiceResponse>
```

Sample - Create an option profile with Enhanced Crawling enabled

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
databinary@-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name><![CDATA[Sample Option Profile]]></name>
      <enhancedCrawling>>true</enhancedCrawling>
    </data>
  </ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
```

```
<id>78110</id>
<name><![CDATA[Sample Option Profile]]></name>
<owner>
  <id>337590</id>
  <username>user_john</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</owner>
<isDefault>>false</isDefault>
<tags>
  <count>0</count>
</tags>
<formSubmission>BOTH</formSubmission>
<maxCrawlRequests>300</maxCrawlRequests>
<timeoutErrorThreshold>100</timeoutErrorThreshold>
<unexpectedErrorThreshold>300</unexpectedErrorThreshold>
<parameterSet>
  <id>0</id>
  <name>
    <![CDATA[Initial Parameters]]>
  </name>
</parameterSet>
<ignoreBinaryFiles>>false</ignoreBinaryFiles>
<includeActionUriInFormId>>false</includeActionUriInFormId>
<enhancedCrawling>>true</enhancedCrawling>
<smartScanSupport>>false</smartScanSupport>
<performance>LOW</performance>
<bruteforceOption>MINIMAL</bruteforceOption>
<detection/>
<comments>
  <count>0</count>
</comments>
...
  </lastName>
</updatedBy>
</OptionProfile>
</data>
</ServiceResponse>
```

Sample - Create - Everything as detection scope

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
databinary@-
```

```
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name><![CDATA[Sample Option Profile]]></name>
      <detection>
        <detectionScope>EVERYTHING</detectionScope>
      </detection>
    </OptionProfile>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>78744</id>
      <name>
        <![CDATA[Sample Option Profile]]>
      </name>
      <owner>
        <id>337590</id>
        <username>user_john</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
      </owner>
      <isDefault>>false</isDefault>
      <tags>
        <count>0</count>
      </tags>
      <formSubmission>BOTH</formSubmission>
      <maxCrawlRequests>300</maxCrawlRequests>
      <timeoutErrorThreshold>100</timeoutErrorThreshold>
      <unexpectedErrorThreshold>300</unexpectedErrorThreshold>
```

```
<parameterSet>
  <id>0</id>
  <name>
    <![CDATA[Initial Parameters]]>
  </name>
</parameterSet>
<ignoreBinaryFiles>>false</ignoreBinaryFiles>
<includeActionUriInFormId>>false</includeActionUriInFormId>
<enhancedCrawling>>false</enhancedCrawling>
<smartScanSupport>>false</smartScanSupport>
<performance>LOW</performance>
<bruteforceOption>MINIMAL</bruteforceOption>
<detection>
  <detectionScope>EVERYTHING</detectionScope>
</detection>
<comments>
  <count>0</count>
</comments>
...
</updatedBy>
</OptionProfile>
</data>
</ServiceResponse>
```

### Sample - Create - SSL/TLS and Certificate issues

You can execute specialized scan that performs tests for SSL/TLS and Certificate related vulnerabilities using the option profile with SSL/TLS and Certificate category configured in the API request.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
databinary@-
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/optionprofile" <
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name><![CDATA[Option Profile with SSL data]]></name>
      <detection>
```

```
<detectedCategories>
  <set>
    <DetectionCategory>
      <name>SSL/TLS and Certificate issues</name>
    </DetectionCategory>
  </set>
</detectedCategories>
</detected>
</OptionProfile>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>897483</id>
      <name>
        <![CDATA[My Option Profile - SSL data]]>
      </name>
      <owner>
        <id>412791</id>
        <username>user_john</username>
        <firstName><![CDATA[John]]></firstName>
        <lastName><![CDATA[Doe]]></lastName>
      </owner>
      <isDefault>>false</isDefault>
      <tags>
        <count>0</count>
      </tags>
      ...
    <detected>
      <detectedCategories>
        <count>1</count>
        <list>
          <DetectionCategory>
            <id>152</id>
            <name>SSL/TLS and Certificate
            issues</name>
```

```
        </DetectionCategory>
      </list>
    </detectionCategories>
    <enableXssPayloads>>false</enableXssPayloads>
  </detection>
  ...
</OptionProfile>
</data>
</ServiceResponse>
```

XSD

[platform API server](https://platform-api-server/qps/xsd/3.0/was/optionprofile.xsd)/qps/xsd/3.0/was/optionprofile.xsd

## Update an Option Profile

`/qps/rest/3.0/update/was/optionprofile/<id>`

[POST]

Update an option profile which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Update Option Profile".

### Input Parameters

The element "id" (integer) is required, where "id" identifies an option profile. Additional elements are optional and must be supplied in POST XML data. At least one of the following elements must be set: name, isDefault, owner, tags, formSubmission, maxCrawlRequests, userAgent, parameterSet, ignoreBinaryFiles, performance, bruteforceOption, bruteforceList, numberOfAttempts, detection, sensitiveContent, comments.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the option profile.
name	(text) The name given to the option profile.
tags	Filter by tags applied.
tags.id	(integer) ID of the tag assigned to option profile.
tags.name	(text) Tag name assigned to option profile.
owner.id	(Long with operator: EQUALS, IN, NOT EQUALS, GREATER or LESSER) ID of the owner who created the option profile.

*Qualys Web Application Scanning API  
Configuration*

owner.name	(text) Full name of the user who created the option profile.
owner.username	(text) Username of the owner who created the option profile. (like user_ab3).
isDefault	Default option profile for the subscription
formSubmission	(keyword) Type of form: None, Post, Get, POST& GET
maxCrawlRequests	Total number of links and forms to follow and test within the scan scope. If performing a Discovery Scan, this is the maximum links that will be crawled, as there will not be any testing performed
userAgent	Stores the browser and OS details.
parameterSet	A parameter set tells us the request parameter settings you would like us to inject into your web applications during scanning. We provide a default one and it is easy to configure more. Once defined just select the parameter set name in your scan's option profile.
ignoreBinaryFiles	If you choose these option files with extension zip, pdf, doc are not scanned.
performance	(keyword) Scan Intensity: LOWEST, LOW, MEDIUM, HIGH, MAXIMUM.
customPerformance*	Configure the custom intensity level for web application scans.  Example:  <customPerformance> <numOfHttpThreads>10</numOfHttpThreads> <delayBetweenRequests>5</delayBetweenRequests> </customPerformance>

## Qualys Web Application Scanning API Configuration

Note: performance and customPerformance are mutually exclusive parameters and cannot be used together. You can use only either of them for an option profile.

numOfHttpThreads	(integer) Number of threads to be used to scan each host. The valid range is from 1 to 10.
delayBetweenRequests	(integer) The duration of delay introduced by WAS in between the scanning engine requests sent to the applications server. The valid range is from 0 to 2000 milliseconds.
bruteforceOption	The level of brute forcing you prefer with options ranging from "Minimal" to "Exhaustive".
bruteforceList	(keyword: User List/SYSTEM LIST)  System list: we'll attempt to guess the password for each detected login ID.  User list: to select a bruteforce list defined in your account .
numberOfAttempts	The threshold to be reached before stopping the scan. If you deactivate this settings, the scan will keep running no matter how many errors it will find.
detection	(keyword) Select if scans launched with this profile shall perform a full assessment for all WAS detections the engine is able to discover, or if the scan shall focus on the detection of specific vulnerabilities and/or information: Core, Categories, Custom Search list, XSS Power Mode, Everything.  If <detectionScope> is present then the detection scope = CORE or EVERYTHING Core: Core scope includes vulnerabilities that Qualys considers most common in today's web applications. It does not include all the vulnerabilities that WAS can detect. Everything: Everything scope includes all the vulnerabilities that WAS can detect.

## Qualys Web Application Scanning API Configuration

Example:

```
<detection>  
<detectionScope>EVERYTHING</detectionScope>  
</detection>
```

If <includedSearchLists> or <excludedSearchLists> are present then the detection scope = CUSTOM

If <detectionCategories> is present then the detection scope = CATEGORY

if <xssPowerMode> is true then the detection scope = XSS

Note: The <includedSearchLists>, <excludedSearchLists>, <detectionCategories>, <xssPowerMode>, <detectionScope> elements are mutually exclusive elements.

enableXssPayloads

(boolean) A flag to indicate if XSS payloads should be enabled or disabled during the scan. If the flag is set to true, comprehensive tests for cross-site scripting vulnerabilities are executed during the scan.

Example:

```
<detection>  
  <detectionScope>CORE</detectionScope>  
  <enableXssPayloads>>true</enableXssPayloads>  
</detection>
```

sensitiveContent

Credit Card Numbers, Social Security Numbers (US), Custom Contents.

keywordsUrlSearch

(text) Specify keywords in the form of strings and regular expressions to search for URL links that contains the specified keyword. Currently, we search for keywords only in the internal links that are found in the crawling phase for target web applications in a Discovery/Vulnerability scan.

You can enter a maximum of 10 keywords where each

## Qualys Web Application Scanning API Configuration

keyword appears on a separate line. A keyword should be 5 to 200 characters long.

During a Discovery/Vulnerability scan, we search for these keywords and report all the unique links that contain the specified keywords in the Get Finding Details API output under information gathered QID 150141. Note that we show the crawled links under QID 150009.

### enhancedCrawling

(boolean) Improve scan coverage for your web application with the enhanced crawling enabled. We will re-crawl individual directories present in the links which are found during crawling.

For example, if the following link is found during crawling:

<https://www.example.com/foo/abc/xyz/register.php>

If the enhanced crawling is enabled, it will first make a request to <https://www.example.com/foo/abc/xyz>

and will then remove the directory "xyz/" from the URL and crawl, <https://www.example.com/foo/abc/>

and later it will further remove "abc/" and will crawl <https://www.example.com/foo/>.

All the links found during this process of removal and re-crawling will get added to the crawl queue thus improving the scan coverage.

### comments

User-defined comments.

### Samples

[Update - minimum criteria \(POST\)](#)

[Update - multiple settings \(POST\)](#)

[Update - owner \(POST\)](#)

[Update - custom threshold values \(POST\)](#)

[Update - disable action URI \(POST\)](#)

[Update - Detection Category \(POST\)](#)

[Update Option Profile for Custom Scan Intensity \(POST\)](#)

[Update an Option Profile to disable enhanced crawling \(POST\)](#)

[Update option profile to change detection scope to Everything](#)

[Update Option Profile to enable XSS payload](#)

[Update option profile with "SSL/TLS and Certificate issues"](#)

Sample - Update - minimum criteria (POST)

Change the option profile name to "Update Option Profile - title" for option profile ID 832265669.

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/83  
2265669" < file.xml  
Note: "file.xml" contains the request POST data.
```

#### Request POST data

```
<ServiceRequest>  
  <data>  
    <OptionProfile>  
      <name><![CDATA[Update Option Profile - title ]]></name>  
    </OptionProfile>  
  </data>  
</ServiceRequest>
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0  
/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>
```

```
<data>
  <OptionProfile>
    <id>832265669</id>
  </OptionProfile>
</data>
</ServiceResponse>
```

Sample - Update - multiple settings (POST)

Update multiple option profile settings for option profile ID 832275669.

### API request

```
url -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--
data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/83
2275669" < file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name><![CDATA[My Option Profile - All Fields]]></name>
      <formSubmission>BOTH</formSubmission>
      <maxCrawlRequests>100</maxCrawlRequests>
      <performance>HIGH</performance>
      <bruteforceOption>USER_DEFINED</bruteforceOption>
      <parameterSet><id>15669</id></parameterSet>
      <isDefault>>false</isDefault>
      <ignoreBinaryFiles>>false</ignoreBinaryFiles>
      <userAgent><![CDATA[Mozilla/5.0 (Windows NT 6.2; WOW64)
AppleWebKit/537.36 (KHTML, like Gecko) Chrome/27.0.1453.116
Safari/537.36]]></userAgent>
      <tags><set><Tag><id>75521225669</id></Tag></set></tags>
      <sensitiveContent>
        <customContents>zip code</customContents>
      </sensitiveContent>
      <comments>
        <set>
          <Comment>
            <contents><![CDATA[Comment 2]]></contents>
          </Comment>
        </set>
```

```
</comments>
<bruteforceList>
  <id>74005669</id>
</bruteforceList>
<detection>
  <includedSearchLists>
    <set>
      <SearchList>
        <id>3496185669</id>
      </SearchList>
    </set>
  </includedSearchLists>
  <excludedSearchLists>
    <set>
      <SearchList>
        <id>3496175669</id>
      </SearchList>
      <SearchList>
        <id>3496165669</id>
      </SearchList>
    </set>
  </excludedSearchLists>
</detection>
</OptionProfile>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>832275669</id>
    </OptionProfile>
  </data>
</ServiceRequest>
```

Sample - Update - owner (POST)

Update the option profile owner.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/12  
3456" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <OptionProfile>  
      <owner><id>123456</id></owner>  
    </OptionProfile>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse  
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
  xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <OptionProfile>  
      <id>123456</id>  
    </OptionProfile>  
  </data>  
</ServiceResponse>
```

Sample - Update - custom threshold values (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/45  
2933" < file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name><![CDATA[My OP - with custom threshold values]]></name>

      <timeoutErrorThreshold>200</timeoutErrorThreshold>
      <unexpectedErrorThreshold>20</unexpectedErrorThreshold>
    </OptionProfile>
  </data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>452933</id>
    </OptionProfile>
  </data>
</ServiceResponse>
```

Sample - Update - disable action URI (POST)

Update the Option Profile to disable Action URI.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST"--
data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/17
6683" < file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
  <data>
    <OptionProfile>
      <name>
        <![CDATA[My Option Profile - with action URI]]>
      </name>
    </OptionProfile>
  </data>
</ServiceRequest>
```

```
        </name>
        <includeActionUriInFormId>>false</includeActionUriInFormId>
    </OptionProfile>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance" xsi:noNamespaceSchemaLocation="http://qualysapi
.qualys.com/portal-api/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>176683</id>
    </OptionProfile>
  </data>
</ServiceResponse>
```

Sample - Update - Detection Category (POST)

Update the detection scope in the Option Profile.

## API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST"--
data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/17
6683" < file.xml
Note: "file.xml" contains the request POST data.
```

## Request POST data

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceRequest>
  <data>
    <OptionProfile>
      <detection>
        <detectionCategories>
          <remove>
            <DetectionCategory>
              <name>Denial of Service</name>
            </DetectionCategory>
```

```
        </remove>
        <add>
          <DetectionCategory>
            <name>SQL Injection</name>
          </DetectionCategory>
        </add>
      </detectionCategories>
    </detection>
  </OptionProfile>
</data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchemainstance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd
/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>305786</id>
    </OptionProfile>
  </data>
</ServiceResponse>
```

Sample - Update Option Profile for Custom Scan Intensity (POST)

Let us update an Option Profile with customized scan intensity.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml"-X "POST"--
data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/16
08560" < file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
<data>
  <OptionProfile>
```

```

    <name><![CDATA[Update Option Profile with Custom Scan
Intensity]]></name>
    <customPerformance>
      <numOfHttpThreads>10</numOfHttpThreads>
      <delayBetweenRequests>20</delayBetweenRequests>
    </customPerformance>
  </OptionProfile>
</data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>1608560</id>
    </OptionProfile>
  </data>
</ServiceResponse>

```

Sample - Update an Option Profile to disable enhanced crawling (POST)

Let us update an Option Profile with customized scan intensity.

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--
data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/83
2265669" < file.xml
Note: "file.xml" contains the request POST data.

```

### Request POST data

```

<ServiceRequest>
  <data>
    <OptionProfile>
      <enhancedCrawling>>false</enhancedCrawling>
    </OptionProfile>
  </data>

```

```
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <OptionProfile>  
      <id>832265669</id>  
    </OptionProfile>  
  </data>  
</ServiceResponse>
```

Sample - Update option profile to change detection scope to Everything

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/83  
2265669" < file.xml  
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>  
  <data>  
    <OptionProfile>  
      <detection>  
        <detectionScope>EVERYTHING</detectionScope>  
      </detection>  
    </OptionProfile>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
was/optionprofile.xsd">
```

```

<responseCode>SUCCESS</responseCode>
<count>1</count>
<data>
  <OptionProfile>
    <id>832265669</id>
  </OptionProfile>
</data>
</ServiceResponse>

```

Sample - Update Option Profile to enable XSS payload

### API request

```

curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--
data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile/16
003" < file.xml
Note: "file.xml" contains the request POST data.

```

### Request POST data

```

<ServiceRequest>
  <data>
    <OptionProfile>
      <name>Sample Option Profile With XSS Payloads</name>
      <detection>
        <detectionScope>CORE</detectionScope>
        <enableXssPayloads>true</enableXssPayloads>
      </detection>
    </OptionProfile>
  </data>
</ServiceRequest>

```

### XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>16003</id>
    </OptionProfile>

```

```
</data>  
</ServiceResponse>
```

Sample - Update option profile with "SSL/TLS and Certificate issues"

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/optionprofile" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <OptionProfile>  
      <detection>  
        <detectionCategories>  
          <set>  
            <DetectionCategory>  
              <name>SSL/TLS and Certificate issues</name>  
            </DetectionCategory>  
          </set>  
        </detectionCategories>  
      </detection>  
    </OptionProfile>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.  
0/was/optionprofile.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <OptionProfile>  
      <id>897483</id>  
    </OptionProfile>  
  </data>  
</ServiceResponse>
```

XSD

[platform API server](https://platform-api-server/qps/xsd/3.0/was/optionprofile.xsd)/qps/xsd/3.0/was/optionprofile.xsd

## Delete an Option Profile

/qps/rest/3.0/delete/was/optionprofile/<id>

/qps/rest/3.0/delete/was/optionprofile

[POST]

Delete an option profile that is in the user's scope. Upon success, the output is a list of IDs for the option profiles that were deleted.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and "Delete Option Profile".

### Input Parameters

Optional elements are used to retrieve option profiles to delete. When multiple elements are specified, parameters are combined using a logical AND. All dates must be entered in UTC date/time format.

[Click here for available operators](#)

Parameter	Description
name	(text) The name given to the option profile.
owner	(text) Username of the owner who created the option profile. (like user_ab3).
tags	(text) Filter by tags applied to option profile.
createdDate	(date) The date when the option profile was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the option profile was updated in WAS, in UTC date/time format.
usedByWebApps	(boolean) Web applications used/not used by the option profile.

usedBySchedules (boolean) Scan schedules used/not used by the option profile.

Sample - Delete specific option profile (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary @-"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/optionprofile/834275669"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <OptionProfile>
      <id>834275669</id>
    </OptionProfile>
  </data>
</ServiceResponse>
```

Sample - Delete multiple option profiles (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/optionprofile/"
< file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>
  <filters>
    <Criteria field="name" operator="CONTAINS">OP</Criteria>
```

```

    <Criteria field="updatedAt" operator="LESSER">2017-09-
09</Criteria>
  </filters>
</ServiceRequest>

```

## XML response

```

<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/optionprofile.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>10</count>
  <data>
    <OptionProfile>
      <id>712265669</id>
    </OptionProfile>
    <OptionProfile>
      <id>752265669</id>
    </OptionProfile>
    <OptionProfile>
      <id>752275669</id>
    </OptionProfile>
    <OptionProfile>
      <id>754265669</id>
    </OptionProfile>
    <OptionProfile>
      <id>812685669</id>
    </OptionProfile>
    <OptionProfile>
      <id>824295669</id>
    </OptionProfile>
    <OptionProfile>
      <id>824305669</id>
    </OptionProfile>
    <OptionProfile>
      <id>830265669</id>
    </OptionProfile>
    <OptionProfile>
      <id>830275669</id>
    </OptionProfile>
    <OptionProfile>
      <id>830285669</id>
    </OptionProfile>
  </data>
</ServiceResponse>

```

XSD

[platform API server](https://platform-api-server/qps/xsd/3.0/was/optionprofile.xsd)/qps/xsd/3.0/was/optionprofile.xsd

## Reference: Option Profile

The <OptionProfile> element includes sub elements used to define an option profile. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) The ID of the option profile.
name	(text) The name given to the option profile.
tags	Filter by tags applied.
tags.id	(integer) ID of the tag assigned to option profile.
tags.name	(text) Tag name assigned to option profile.
createdDate	(date) The date when the option profile was created in WAS, in UTC date/time format.
updatedAt	(date) The date when the option profile was updated in WAS, in UTC date/time format.
usedByWebApps	(boolean) Web applications used/not used by the option profile.
usedBySchedules	(boolean) Scan schedules used/not used by the option profile.
owner.id	(Long with operator: EQUALS, IN, NOT EQUALS, GREATER or LESSER) ID of the owner who created the option profile.
owner.name	(text) Full name of the user who created the option profile.
owner.username	(text) Username of the owner who created the option profile. (like user_ab3).

*Qualys Web Application Scanning API  
Configuration*

isDefault	Default option profile for the subscription
formSubmission	(keyword) Type of form: None, Post, Get, POST& GET
maxCrawlRequests	Total number of links and forms to follow and test within the scan scope. If performing a Discovery Scan, this is the maximum links that will be crawled, as there will not be any testing performed
userAgent	Stores the browser and OS details.
parameterSet	A parameter set tells us the request parameter settings you would like us to inject into your web applications during scanning. We provide a default one and it is easy to configure more. Once defined just select the parameter set name in your scan's option profile.
ignoreBinaryFiles	If you choose these option files with extension zip, pdf, doc are not scanned.
performance	(keyword) Scan Intensity: LOWEST, LOW, MEDIUM, HIGH, MAXIMUM.
customPerformance*	<p>Configure the custom intensity level for web application scans.</p> <p>Example:</p> <pre>&lt;customPerformance&gt;   &lt;numOfHttpThreads&gt;10&lt;/numOfHttpThreads&gt;   &lt;delayBetweenRequests&gt;5&lt;/delayBetweenRequests&gt; &lt;/customPerformance&gt;</pre> <p>Note: performance and customPerformance are mutually exclusive parameters and cannot be used together. You can use only either of them for an option profile.</p>
numOfHttpThreads	(integer) Number of threads to be used to scan each host. The valid range is from 1 to 10.
delayBetweenRequests	(integer) The duration of delay introduced by WAS in

*Qualys Web Application Scanning API  
Configuration*

between the scanning engine requests sent to the applications server. The valid range is from 0 to 2000 milliseconds.

bruteforceOption	The level of brute forcing you prefer with options ranging from "Minimal" to "Exhaustive".
bruteforceList	(keyword: User List/SYSTEM LIST)  System list: we'll attempt to guess the password for each detected login ID.  User list: to select a bruteforce list defined in your account .
numberOfAttempts	The threshold to be reached before stopping the scan. If you deactivate this settings, the scan will keep running no matter how many errors it will find.
detection	(keyword) Select if scans launched with this profile shall perform a full assessment for all WAS detections the engine is able to discover, or if the scan shall focus on the detection of specific vulnerabilities and/or information: Core, Categories, Custom Search list, XSS Power Mode, Everything.  If <detectionScope> is present then the detection scope = CORE or EVERYTHING Core: Core scope includes vulnerabilities that Qualys considers most common in today's web applications. It does not include all the vulnerabilities that WAS can detect. Everything: Everything scope includes all the vulnerabilities that WAS can detect. Example:  <detection> <detectionScope>EVERYTHING</detectionScope> </detection>  If <includedSearchLists> or <excludedSearchLists> are present then the detection scope = CUSTOM

## Qualys Web Application Scanning API Configuration

If <detectedCategories> is present then the detection scope = CATEGORY

if <xssPowerMode> is true then the detection scope = XSS

Note: The <includedSearchLists>, <excludedSearchLists>, <detectedCategories>, <xssPowerMode>, <detectionScope> elements are mutually exclusive elements.

sensitiveContent

Credit Card Numbers, Social Security Numbers (US), Custom Contents.

keywordsUrlSearch

(text) Specify keywords in the form of strings and regular expressions to search for URL links that contains the specified keyword. Currently, we search for keywords only in the internal links that are found in the crawling phase for target web applications in a Discovery/Vulnerability scan.

You can enter a maximum of 10 keywords where each keyword appears on a separate line. A keyword should be 5 to 200 characters long.

During a Discovery/Vulnerability scan, we search for these keywords in the internal links and report all the unique links that contain the specified keywords in the Get Finding Details API output under information gathered QID 150141. Note that we show the crawled links under QID 150009.

enhancedCrawling

(boolean) Improve scan coverage for your web application with the enhanced crawling enabled. We will re-crawl individual directories present in the links which are found during crawling.

For example, if the following link is found during crawling:

<https://www.example.com/foo/abc/xyz/register.php>

If the enhanced crawling is enabled, it will first make a

*Qualys Web Application Scanning API  
Configuration*

request to <https://www.example.com/foo/abc/xyz>

and will then remove the directory "xyz/" from the URL and crawl, <https://www.example.com/foo/abc/>

and later it will further remove "abc/" and will crawl <https://www.example.com/foo/>.

All the links found during this process of removal and re-crawling will get added to the crawl queue thus improving the scan coverage.

comments

User-defined comments.

## DNS Override

### DNS Override Count

/qps/rest/3.0/count/was/dnsoverride/

[GET] [POST]

Returns the total number of DNS overrides in the user's scope. Input elements are optional and are used to filter the number of option profiles included in the count.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The count includes web applications in the user's scope.

#### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the DNS override.
name	(text) The name given to the DNS override.
tags	Filter by tags applied.
tags.id	(integer) ID of the tag assigned to DNS override.
tags.name	(text) Tag name assigned to DNS override.
createdDate	(date) The date when the DNS override was created in WAS, in UTC date/time format.

updatedDate	(date) The date when the DNS override was updated in WAS, in UTC date/time format.
owner.id	(Long with operator: EQUALS, IN, NOT EQUALS, GREATER or LESSER) ID of the owner who created the DNS override.
owner.name	(text) Full name of the user who created the DNS override.
owner.username	(text) Username of the owner who created the DNS override. (like user_ab3).

Sample - Count (POST)

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/count/was/dnsoverride/" <  
file.xml
```

Note: "file.xml" contains the request POST data.

#### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="name" operator="CONTAINS">Test  
API</Criteria>  
  </filters>  
</ServiceRequest>
```

#### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
/was/dnsoverride.xsd">  
<responseCode>SUCCESS</responseCode>  
  <count>6</count>  
</ServiceResponse>
```

XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/dnsoverride.xsd)/qps/xsd/3.0/was/dnsoverride.xsd

## Search DNS Override

`/qps/rest/3.0/search/was/dnsoverride/`

[POST]

Returns a list of DNS overrides which are in the user's scope. Action logs are not included in the output.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The Output includes DNS overrides in the user's scope.

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the DNS override.
name	(text) The name given to the DNS override.
tags	Filter by tags applied.
tags.id	(integer) ID of the tag assigned to DNS override.
tags.name	(text) Tag name assigned to DNS override.
createdDate	(date) The date when the DNS override was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the DNS override was updated in WAS, in UTC date/time format.
owner.id	(Long with operator: EQUALS, IN, NOT EQUALS,

GREATER or LESSER) ID of the owner who created the DNS override.

owner.name (text) Full name of the user who created the DNS override.

owner.username (text) Username of the owner who created the DNS override. (like user\_ab3).

Sample - Search - criteria (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/dnsoverride/" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="name" operator="CONTAINS">Test  
API</Criteria>  
  </filters>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/xsd/3.0/was/  
/dnsoverride.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>6</count>  
  <hasMoreRecords>>false</hasMoreRecords>  
  <data>  
    <DnsOverride>  
      <id>56420</id>  
      <name>  
        <![CDATA[Test API DNS Record]]>  
      </name>  
      <owner>
```

```
<username>user_john</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</owner>
<tags>
  <count>0</count>
</tags>
<createdDate>2019-08-12T13:33:04Z</createdDate>
<updatedAt>2019-08-12T13:33:04Z</updatedAt>
</DnsOverride>
<DnsOverride>
  <id>56422</id>
  <name>
    <![CDATA[Test API Dns Record1]]>
  </name>
  <owner>
    <id>1056860</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </owner>
  <tags>
    <count>0</count>
  </tags>
  <createdDate>2019-08-12T13:58:59Z</createdDate>
  <updatedAt>2019-08-12T13:58:59Z</updatedAt>
</DnsOverride>
<DnsOverride>
  <id>56423</id>
  <name>
    <![CDATA[Test API Dns Record2]]>
  </name>
  <owner>
    <id>1056860</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </owner>
  <tags>
    <count>2</count>
  </tags>
  <createdDate>2019-08-12T15:30:24Z</createdDate>
  <updatedAt>2019-08-12T15:30:30Z</updatedAt>
</DnsOverride>
<DnsOverride>
```

```
<id>56621</id>
<name>
  <![CDATA[Test API Dns Record3]]>
</name>
<owner>
  <id>1056860</id>
  <username>user_john</username>
  <firstName><![CDATA[John]]></firstName>
  <lastName><![CDATA[Doe]]></lastName>
</owner>
<tags>
  <count>2</count>
</tags>
<createdDate>2019-08-12T23:03:53Z</createdDate>
<updatedAt>2019-08-12T23:03:59Z</updatedAt>
</DnsOverride>
<DnsOverride>
  <id>56820</id>
  <name>
    <![CDATA[Test API Dns Record3-Updated]]>
  </name>
  <owner>
    <id>1056860</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </owner>
  <tags>
    <count>0</count>
  </tags>
  <createdDate>2019-08-13T00:07:37Z</createdDate>
  <updatedAt>2019-08-16T14:10:18Z</updatedAt>
</DnsOverride>
<DnsOverride>
  <id>57020</id>
  <name>
    <![CDATA[Test API Dns Record4]]>
  </name>
  <owner>
    <id>1056860</id>
    <username>user_john</username>
    <firstName><![CDATA[John]]></firstName>
    <lastName><![CDATA[Doe]]></lastName>
  </owner>
  <tags>
```

```
        <count>1</count>
      </tags>
      <createdDate>2019-08-19T16:25:05Z</createdDate>
      <updatedDate>2019-08-22T12:35:40Z</updatedDate>
    </DnsOverride>
  </data>
</ServiceResponse>
```

XSD

[<platform API server>/qps/xsd/3.0/was/dnsoverride.xsd](#)

## Get DNS Override Details

/qps/rest/3.0/get/was/dnsoverride/<id>

[GET]

View details for an DNS override which is in the user's scope. See "[Search DNS overrides](#)" to find a record ID to use as input.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access". The Output includes DNS overrides in the user's scope.

Input Parameters

The element "id" (integer) is required, where "id" identifies an option profile.

[Click here for available operators](#)

Sample - Get details of an option profile (GET)

Let us fetch details of DNS override. Ensure that you do not add any data or filter in the request.

### API request

```
curl -u "USERNAME:PASSWORD" " -X GET -H "Content-type: text/xml"  
"https://qualysapi.qualys.com/qps/rest/3.0/get/was/dnsoverride/57020"
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
/was/dnsoverride.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <DnsOverride>  
      <id>57020</id>  
      <name>  
        <![CDATA[Test API DNS Record4]]>  
      </name>
```

```
...
<mappings>
  <count>3</count>
  <list>
    <DnsMapping>
      <hostName>host_1</hostName>
      <ipAddress>1.2.3.7</ipAddress>
    </DnsMapping>
    <DnsMapping>
      <hostName>host_2</hostName>
      <ipAddress>1.2.3.5</ipAddress>
    </DnsMapping>
    <DnsMapping>
      <hostName>host_3</hostName>
      <ipAddress>1.2.3.5</ipAddress>
    </DnsMapping>
  </list>
</mappings>
</DnsOverride>
</data>
</ServiceResponse>
```

## Create DNS Override

`/qps/rest/3.0/create/was/dnsoverride`

[POST]

Create a new DNS Override.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access".

Input Parameters

The element "name" (text) and "mappings" is required, where "name" is name of the DNS override.

[Click here for available operators](#)

Parameter	Description
name	(text) The name given to the DNS override.

DnsMapping (keyword)  
Use to configure the DNS override setting through API. You need to specify the hostname or FQDN and the corresponding IP address to be preferred for scanning.

Example:

```
<set>
  <DnsMapping>
    <hostName>test</hostName>
    <ipAddress>2.3.4.5</ipAddress>
  </DnsMapping>
</set>
```

When you create a new DNS override, ensure:

- Name (Required): Name should be unique.
- Tags: The tag id should be valid and in scope of current user. Use only <Set> tag.
- Mappings (Required): Each mapping must have hostName and IpAddress in valid format. Use only <Set> tag.
- Comments: Only <Set> with 1 comment is allowed with maximum length 2048 characters.

### Sample - Create DNS Override (POST)

#### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/create/was/dnsoverride/" <  
file.xml
```

Note: "file.xml" contains the request POST data.

#### Request POST data

```
<ServiceRequest>  
  <data>  
    <DnsOverride>  
      <name><![CDATA[DNS Record]]></name>  
      <mappings>  
        <set>  
          <DnsMapping>  
            <hostName>host_1</hostName>  
            <ipAddress>2.3.4.5</ipAddress>  
          </DnsMapping>  
          <DnsMapping>  
            <hostName>host_2</hostName>  
            <ipAddress>1.2.3.4</ipAddress>  
          </DnsMapping>  
        </set>  
      </mappings>  
      <tags>  
        <set>  
          <Tag>  
            <id>8993614</id>
```

```
        </Tag>
        <Tag>
            <id>8876615</id>
        </Tag>
    </set>
</tags>
</DnsOverride>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/dnsoverride.xsd">
    <responseCode>SUCCESS</responseCode>
    <count>1</count>
    <data>
        <DnsOverride>
            <id>57220</id>
            <name>
                <![CDATA[DNS Record]]>
            </name>
            ...
            <mappings>
                <count>2</count>
                <list>
                    <DnsMapping>
                        <hostName>host_1</hostName>
                        <ipAddress>2.3.4.5</ipAddress>
                    </DnsMapping>
                    <DnsMapping>
                        <hostName>host_2</hostName>
                        <ipAddress>1.2.3.4</ipAddress>
                    </DnsMapping>
                </list>
            </mappings>
        </DnsOverride>
    </data>
</ServiceResponse>
```

## Update an DNS Override

`/qps/rest/3.0/update/was/dnsoverride`

[POST]

Update an DNS override which is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access".

Input Parameters

[Click here for available operators](#)

Parameter	Description
name	(text) The name given to the DNS override.
DnsMapping (keyword)	Use to configure the DNS override setting through API. You need to specify the hostname or FQDN and the corresponding IP address to be preferred for scanning.  Example:  <pre>&lt;set&gt;   &lt;DnsMapping&gt;     &lt;hostName&gt;test&lt;/hostName&gt;     &lt;ipAddress&gt;2.3.4.5&lt;/ipAddress&gt;   &lt;/DnsMapping&gt; &lt;/set&gt;</pre>

When you update an DNS override, ensure:

- Name: In case of name update, the updated name should be unique.
- Id is required.

-At least one of the following should be present other than id: Name, owner, tags, comments, mappings

-Tags: The <set> and <Add>/ <Removed> tags are mutually exclusive. Either use <set> or <Add> and <Removed>.

- Mappings: The <set> and <Add>/ <Removed> tags are mutually exclusive. Either use <set> or <Add> and <Removed>.

Sample - Update DNS Override (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/dnsoverride/" <  
file.xml
```

Note: "file.xml" contains the request POST data.

### Request POST data

```
<ServiceRequest>  
  <data>  
    <DnsOverride>  
      <name><![CDATA[DNS Record]]></name>  
      <mappings>  
        <set>  
          <DnsMapping>  
            <hostName>host_1</hostName>  
            <ipAddress>2.3.4.5</ipAddress>  
          </DnsMapping>  
          <DnsMapping>  
            <hostName>host_2</hostName>  
            <ipAddress>1.2.3.4</ipAddress>  
          </DnsMapping>  
        </set>  
      </mappings>  
      <tags>  
        <set>  
          <Tag>  
            <id>8993614</id>
```

```
        </Tag>
        <Tag>
            <id>8876615</id>
        </Tag>
    </set>
</tags>
</DnsOverride>
</data>
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/dnsoverride.xsd">
    <responseCode>SUCCESS</responseCode>
    <count>1</count>
    <data>
        <DnsOverride>
            <id>57020</id>
        </DnsOverride>
    </data>
</ServiceResponse>
```

Sample - Update DNS Override (using add and remove tag)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--
data-binary@-
"https://qualysapi.qualys.com/qps/rest/3.0/update/was/dnsoverride/" <
file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
  <data>
    <DnsOverride>
      <name><![CDATA[DNS Record]]></name>
      <mappings>
        <remove>
          <DnsMapping>
            <hostName>host_1</hostName>
```

```
        <ipAddress>1.2.3.4</ipAddress>
    </DnsMapping>
    <DnsMapping>
        <hostName>host_2</hostName>
        <ipAddress>1.2.3.6</ipAddress>
    </DnsMapping>
</remove>
<add>
    <DnsMapping>
        <hostName>host_3</hostName>
        <ipAddress>1.2.3.5</ipAddress>
    </DnsMapping>
    <DnsMapping>
        <hostName>host_4</hostName>
        <ipAddress>1.2.3.7</ipAddress>
    </DnsMapping>
</add>
</mappings>
<tags>
    <set>
        <Tag>
            <id>8993614</id>
        </Tag>
        <Tag>
            <id>8876615</id>
        </Tag>
    </set>
</tags>
</DnsOverride>
</data>
</ServiceRequest>
```

## XML response

```
<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0
/was/dnsoverride.xsd">
    <responseCode>SUCCESS</responseCode>
    <count>1</count>
    <data>
        <DnsOverride>
            <id>57020</id>
        </DnsOverride>
    </data>
```

```
</ServiceResponse>
```

## Delete DNS Override

`/qps/rest/3.0/delete/was/dnsoverride`

[POST]

Delete a DNS override that is in the user's scope.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access".

### Input Parameters

Optional elements are used to retrieve DNS overrides to delete. When multiple elements are specified, parameters are combined using a logical AND. All dates must be entered in UTC date/time format.

[Click here for available operators](#)

Parameter	Description
id	(integer) The ID of the DNS override.
name	(text) The name given to the DNS override.
tags	Filter by tags applied.
tags.id	(integer) ID of the tag assigned to DNS override.
tags.name	(text) Tag name assigned to DNS override.
createdDate	(date) The date when the DNS override was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the DNS override was updated in WAS, in UTC date/time format.
owner.id	(Long with operator: EQUALS, IN, NOT EQUALS, GREATER or LESSER) ID of the owner who created the

DNS override.

owner.name (text) Full name of the user who created the DNS override.

owner.username (text) Username of the owner who created the DNS override. (like user\_ab3).

Sample - Delete specific DNS override (POST)

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST"--  
data-binary@-  
"https://qualysapi.qualys.com/qps/rest/3.0/delete/was/dnsoverride/" <  
file.xml  
Note: "file.xml" contains the request POST data.
```

### Request POST Data

```
<ServiceRequest>  
  <filters>  
    <Criteria field="id" operator="EQUALS">57020</Criteria>  
  </filters>  
  <data>  
    <DnsOverride>  
      <id>57220</id>  
    </DnsOverride>  
  </data>  
</ServiceRequest>
```

### XML response

```
<?xml version="1.0" encoding="UTF-8"?>  
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
xsi:noNamespaceSchemaLocation="http://qualysapi.qualys.com/qps/xsd/3.0/  
/was/dnsoverride.xsd">  
  <responseCode>SUCCESS</responseCode>  
  <count>1</count>  
  <data>  
    <DnsOverride>  
      <id>57220</id>  
    </DnsOverride>  
  </data>
```

```
</ServiceResponse>
```

## Reference: DNS Override

The <OptionProfile> element includes sub elements used to define an option profile. A reference of these elements is provided below. An asterisk \* indicates a complex element.

Parameter	Description
id	(integer) The ID of the DNS override.
name	(text) The name given to the DNS override.
tags	Filter by tags applied.
tags.id	(integer) ID of the tag assigned to DNS override.
tags.name	(text) Tag name assigned to DNS override.
createdDate	(date) The date when the DNS override was created in WAS, in UTC date/time format.
updatedDate	(date) The date when the DNS override was updated in WAS, in UTC date/time format.
owner.id	(Long with operator: EQUALS, IN, NOT EQUALS, GREATER or LESSER) ID of the owner who created the DNS override.
owner.name	(text) Full name of the user who created the DNS override.
owner.username	(text) Username of the owner who created the DNS override. (like user_ab3).
DnsMapping (keyword)	Use to configure the DNS override setting through API. You need to specify the hostname or FQDN and the corresponding IP address to be preferred for scanning.

Example:

```
<set>
  <DnsMapping>
    <hostName>test</hostName>
    <ipAddress>2.3.4.5</ipAddress>
  </DnsMapping>
</set>
```

When you create a new DNS override, ensure:

- Name (Required): Name should be unique.
- Tags: The tag id should be valid and in scope of current user. Use only <Set> tag.
- Mappings (Required): Each mapping must have hostName and IpAddress in valid format. Use only <Set> tag.
- Comments: Only <Set> with 1 comment is allowed with maximum length 2048 characters.

When you update an DNS override, ensure:

- Name: In case of name update, the updated name should be unique.
- Id is required.
- At lease one of the following should be present other than id: Name, owner, tags, comments, mappings
- Tags: The <set> and <Add>/ <Removed> tags are mutually exclusive. Either use <set> or <Add> and <Removed>.
- Mappings: The <set> and <Add>/ <Removed> tags are mutually exclusive. Either use <set> or <Add> and <Removed>.

# Burp

## Import Burp Issues

`/qps/rest/3.0/import/was/burp`

[POST]

Imports Burp scan reports and store the findings discovered by the Burp Suite scanner with those discovered by WAS. You can import Burp reports to manage your Burp findings with WAS.

Permissions required - User must have WAS module enabled. User account must have these permissions: Access Permission "API Access" and WAS Permission "Import Burp Report".

### Input Parameters

These elements are optional and act as filters. When multiple elements are specified, parameters are combined using a logical AND.

[Click here for available operators](#)

Parameter	Description
webAppId	(integer)The web application ID. This element is assigned by the service and required for an update request.
purgeResults	(boolean) Set to false to indicate if all previous issues for the web application should be retained. By default, it is set to false.  Example: <code>&lt;purgeResults&gt;&gt;false&lt;/purgeResults&gt;</code>
closeUnreportedIssues	(boolean) Set to false to indicate if all previous issues for the web application should be marked as fixed and should not be reported. By default, it is set to false.

```
<closeUnreportedIssues>>false</closeUnreportedIssues>
```

fileName (text) Name of the Burp XML file to be imported. If name is not specified, default format for the file name is API-ImportBurp-dd-mmm-yy hh:mm:ss

## Sample - Import Burp Report

Let us import a burp report for web application with webAppID equal to 1052902. To import the Burp report, you need to specify the webAppID and then paste the contents of the burp results (XML) file in <burpXml> tag.

### API request

```
curl -u "USERNAME:PASSWORD" -H "content-type: text/xml" -X "POST" --
data-binary @-
"https://qualysapi.qualys.com/qps/rest/3.0/import/was/burp" < file.xml
Note: "file.xml" contains the request POST data.
```

### Request POST data

```
<ServiceRequest>
<data>
<webAppId>1524084</webAppId>
<purgeResults>>false</purgeResults>
<closeUnreportedIssues>>false</closeUnreportedIssues>
<fileName>testBurpReportImport</fileName>
<burpXml><?xml version="1.0"?>
<!DOCTYPE issues [
<!ELEMENT issues (issue*)>
<!ATTLIST issues burpVersion CDATA "">
<!ATTLIST issues exportTime CDATA "">
<!ELEMENT issue (serialNumber, type, name, host, path, location,
severity, confidence, issueBackground?, remediationBackground?,
references?, vulnerabilityClassifications?, issueDetail?,
issueDetailItems?, remediationDetail?, requestresponse*,
collaboratorEvent*, infiltratorEvent*, staticAnalysis*,
dynamicAnalysis*)>
<!ELEMENT serialNumber (#PCDATA)>
<!ELEMENT type (#PCDATA)>
<!ELEMENT name (#PCDATA)>
<!ELEMENT host (#PCDATA)>
<!ATTLIST host ip CDATA "">
```

```

<!ELEMENT path (#PCDATA)>
<!ELEMENT location (#PCDATA)>
<!ELEMENT severity (#PCDATA)>
<!ELEMENT confidence (#PCDATA)>
<!ELEMENT issueBackground (#PCDATA)>
<!ELEMENT remediationBackground (#PCDATA)>
<!ELEMENT references (#PCDATA)>
<!ELEMENT vulnerabilityClassifications (#PCDATA)>
<!ELEMENT issueDetail (#PCDATA)>
<!ELEMENT issueDetailItems (issueDetailItem*)>
<!ELEMENT issueDetailItem (#PCDATA)>
<!ELEMENT remediationDetail (#PCDATA)>
<!ELEMENT requestresponse (request?, response?, responseRedirected?)>
<!ELEMENT request (#PCDATA)>
<!ATTLIST request method CDATA "">
<!ATTLIST request base64 (true|false) "false">
<!ELEMENT response (#PCDATA)>
<!ATTLIST response base64 (true|false) "false">
<!ELEMENT responseRedirected (#PCDATA)>
<!ELEMENT sender (#PCDATA)>
<!ELEMENT message (#PCDATA)>
<!ELEMENT conversation (#PCDATA)>
<!ELEMENT recipient (#PCDATA)>
<!ELEMENT recipients (recipient*)>
<!ELEMENT smtp (sender, recipients, message, conversation)>
<!ELEMENT collaboratorEvent (interactionType, originIp, time,
lookupType?, lookupHost?, requestresponse?, smtp?)>
<!ELEMENT interactionType (#PCDATA)>
<!ELEMENT originIp (#PCDATA)>
<!ELEMENT time (#PCDATA)>
<!ELEMENT lookupType (#PCDATA)>
<!ELEMENT lookupHost (#PCDATA)>
<!ELEMENT infiltratorEvent (parameterName, platform, signature,
stackTrace?, parameterValue?, collaboratorEvent)>
<!ELEMENT parameterName (#PCDATA)>
<!ELEMENT platform (#PCDATA)>
<!ELEMENT signature (#PCDATA)>
<!ELEMENT stackTrace (#PCDATA)>
<!ELEMENT parameterValue (#PCDATA)>
<!ELEMENT dynamicAnalysis (source, sink, sourceStackTrace,
sinkStackTrace, eventListenerStackTrace, sourceValue, sinkValue,
eventHandlerData, eventHandlerDataType, eventHandlerManipulatedData,
poc, origin, isOriginChecked, sourceElementId, sourceElementName,
eventFiredEventName, eventFiredElementId, eventFiredElementName,
eventFiredOuterHtml)>

```

```

<!ELEMENT staticAnalysis (source, sink, codeSnippets)>
<!ELEMENT source (#PCDATA)>
<!ELEMENT sink (#PCDATA)>
<!ELEMENT sourceStackTrace (#PCDATA)>
<!ELEMENT sinkStackTrace (#PCDATA)>
<!ELEMENT eventListenerStackTrace (#PCDATA)>
<!ELEMENT sourceValue (#PCDATA)>
<!ELEMENT sinkValue (#PCDATA)>
<!ELEMENT eventHandlerData (#PCDATA)>
<!ELEMENT eventHandlerDataType (#PCDATA)>
<!ELEMENT sourceElementId (#PCDATA)>
<!ELEMENT sourceElementName (#PCDATA)>
<!ELEMENT eventFiredEventName (#PCDATA)>
<!ELEMENT eventFiredElementId (#PCDATA)>
<!ELEMENT eventFiredElementName (#PCDATA)>
<!ELEMENT eventFiredOuterHtml (#PCDATA)>
<!ELEMENT eventHandlerManipulatedData (#PCDATA)>
<!ELEMENT poc (#PCDATA)>
<!ELEMENT origin (#PCDATA)>
<!ELEMENT isOriginChecked (#PCDATA)>
<!ELEMENT codeSnippets (codeSnippet*)>
<!ELEMENT codeSnippet (#PCDATA)>
]>
<issues burpVersion="2.0.20beta" exportTime="Wed May 29 08:45:42 CDT
2019">
  <issue>
    <serialNumber>5018346890832155648</serialNumber>
    <type>16777728</type>
    <name><![CDATA[Unencrypted communications]]></name>
    <host ip="172.217.164.116">http://google-
gruyere.appspot.com</host>
    <path><![CDATA[//]]></path>
    <location><![CDATA[//]]></location>
    <severity>Low</severity>
    <confidence>Certain</confidence>
    <issueBackground><![CDATA[<p>The application allows users to
connect to it over unencrypted connections. An attacker suitably
positioned to view a legitimate user's network traffic could record
and monitor their interactions with the application and obtain any
information the user supplies. Furthermore, an attacker able to modify
traffic could use the application as a platform for attacks against
its users and third-party websites. Unencrypted connections have been
exploited by ISPs and governments to track users, and to inject
adverts and malicious JavaScript. Due to these concerns, web browser

```

vendors are planning to visually flag unencrypted connections as hazardous.</p>

<p>

To exploit this vulnerability, an attacker must be suitably positioned to eavesdrop on the victim's network traffic. This scenario typically occurs when a client communicates with the server over an insecure connection such as public Wi-Fi, or a corporate or home network that is shared with a compromised computer. Common defenses such as switched networks are not sufficient to prevent this. An attacker situated in the user's ISP or the application's hosting infrastructure could also perform this attack. Note that an advanced adversary could potentially target any connection made over the Internet's core infrastructure.

</p>

<p>Please note that using a mixture of encrypted and unencrypted communications is an ineffective defense against active attackers, because they can easily remove references to encrypted resources when these references are transmitted over an unencrypted connection.</p>]]</issueBackground>

<remediationBackground><![CDATA[<p>Applications should use

transport-level encryption (SSL/TLS) to protect all communications passing between the client and the server. The Strict-Transport-Security HTTP header should be used to ensure that clients refuse to access the server over an insecure

connection.</p>]]</remediationBackground>

<references><![CDATA[<ul>

<li><a href="https://www.chromium.org/Home/chromium-security/marking-http-as-non-secure">Marking HTTP as non-secure</a></li>

<li><a

href="https://wiki.mozilla.org/Security/Server\_Side\_TLS">Configuring Server-Side SSL/TLS</a></li>

<li><a href="https://developer.mozilla.org/en-

US/docs/Web/Security/HTTP\_strict\_transport\_security">HTTP Strict Transport Security</a></li>

</ul>]]</references>

<vulnerabilityClassifications><![CDATA[<ul>

<li><a href="https://cwe.mitre.org/data/definitions/326.html">CWE-326: Inadequate Encryption Strength</a></li>

</ul>]]</vulnerabilityClassifications>

</issue>

<issue>

<serialNumber>5761124851012705280</serialNumber>

<type>2097920</type>

<name><![CDATA[Cross-site scripting (reflected)]]></name>

```
<host ip="172.217.164.116">http://google-
gruyere.appspot.com</host>
<path><![CDATA[/922324844025/login]]></path>
<location><![CDATA[/922324844025/login [URL path
filename]]]></location>
<severity>High</severity>
<confidence>Certain</confidence>
<issueBackground><![CDATA[<p>Reflected cross-site scripting
vulnerabilities arise when data is copied from a request and echoed
into the application's immediate response in an unsafe way. An
attacker can use the vulnerability to construct a request that, if
issued by another application user, will cause JavaScript code
supplied by the attacker to execute within the user's browser in the
context of that user's session with the application.</p>
<p>The attacker-supplied code can perform a wide variety of actions,
such as stealing the victim's session token or login credentials,
performing arbitrary actions on the victim's behalf, and logging their
keystrokes.</p>
<p>Users can be induced to issue the attacker's crafted request in
various ways. For example, the attacker can send a victim a link
containing a malicious URL in an email or instant message. They can
submit the link to popular web sites that allow content authoring, for
example in blog comments. And they can create an innocuous looking web
site that causes anyone viewing it to make arbitrary cross-domain
requests to the vulnerable application (using either the GET or the
POST method).</p>
<p>The security impact of cross-site scripting vulnerabilities is
dependent upon the nature of the vulnerable application, the kinds of
data and functionality that it contains, and the other applications
that belong to the same domain and organization. If the application is
used only to display non-sensitive public content, with no
authentication or access control functionality, then a cross-site
scripting flaw may be considered low risk. However, if the same
application resides on a domain that can access cookies for other more
security-critical applications, then the vulnerability could be used
to attack those other applications, and so may be considered high
risk. Similarly, if the organization that owns the application is a
likely target for phishing attacks, then the vulnerability could be
leveraged to lend credibility to such attacks, by injecting Trojan
functionality into the vulnerable application and exploiting users'
trust in the organization in order to capture credentials for other
applications that it owns. In many kinds of application, such as those
providing online banking functionality, cross-site scripting should
always be considered high risk. </p>]]></issueBackground>
```

```

    <remediationBackground><![CDATA[<p>In most situations where user-
controllable data is copied into application responses, cross-site
scripting
    attacks can be prevented using two layers of defenses:</p>
<ul>
    <li>Input should be validated as strictly as possible on arrival,
given the kind of content that
it is expected to contain. For example, personal names should consist
of alphabetical
and a small range of typographical characters, and be relatively
short; a year of birth
should consist of exactly four numerals; email addresses should match
a well-defined
regular expression. Input which fails the validation should be
rejected, not sanitized.</li>
<li>User input should be HTML-encoded at any point where it is copied
into
application responses. All HTML metacharacters, including &lt; &gt; "
' and =, should be
replaced with the corresponding HTML entities (&amp;lt; &amp;gt;
etc).</li></ul>
<p>In cases where the application's functionality allows users to
author content using
    a restricted subset of HTML tags and attributes (for example, blog
comments which
    allow limited formatting and linking), it is necessary to parse the
supplied HTML to
    validate that it does not use any dangerous syntax; this is a non-
trivial task.</p>]]></remediationBackground>
    <references><![CDATA[<ul><li><a
href="https://support.portswigger.net/customer/portal/articles/1965737
-Methodology_XSS.html">Using Burp to Find XSS
issues</a></li></ul>]]></references>
    <vulnerabilityClassifications><![CDATA[<ul>
<li><a href="https://cwe.mitre.org/data/definitions/79.html">CWE-79:
Improper Neutralization of Input During Web Page Generation ('Cross-
site Scripting')</a></li>
<li><a href="https://cwe.mitre.org/data/definitions/80.html">CWE-80:
Improper Neutralization of Script-Related HTML Tags in a Web Page
(Basic XSS)</a></li>
<li><a href="https://cwe.mitre.org/data/definitions/116.html">CWE-116:
Improper Encoding or Escaping of Output</a></li>
<li><a href="https://cwe.mitre.org/data/definitions/159.html">CWE-159:
Failure to Sanitize Special Element</a></li>
</ul>]]></vulnerabilityClassifications>

```





```

    <remediationBackground><![CDATA[<p>There is usually no good reason
not to set the HttpOnly flag on all cookies. Unless you specifically
require legitimate client-side scripts within your application to read
or set a cookie's value, you should set the HttpOnly flag by including
this attribute within the relevant Set-cookie directive.</p>
<p>You should be aware that the restrictions imposed by the HttpOnly
flag can potentially be circumvented in some circumstances, and that
numerous other serious attacks can be delivered by client-side script
injection, aside from simple cookie stealing.
</p>]]></remediationBackground>
    <references><![CDATA[<ul>
<li><a href='https://www.owasp.org/index.php/HttpOnly'>Configuring
HttpOnly</a></li>
</ul>]]></references>
    <vulnerabilityClassifications><![CDATA[<ul>
<li><a href="https://cwe.mitre.org/data/definitions/16.html">CWE-16:
Configuration</a></li>
</ul>]]></vulnerabilityClassifications>
    <issueDetail><![CDATA[The following cookie was issued by the
application and does not have the HttpOnly flag
set:<ul><li>GRUYERE</li></ul>The cookie does not appear to contain a
session token, which may reduce the risk associated with this issue.
You should review the contents of the cookie to determine its
function.]]></issueDetail>
    <issueDetailItems>
    <issueDetailItem><![CDATA[Other: GRUYERE]]></issueDetailItem>
</issueDetailItems>
    <requestresponse>
    <request method="GET"
base64="true"><![CDATA[ R0VUIC85MjIzMjQ4NDQwMjUvc2F2ZXByb2ZpbGU/YWN0aW9
uPW5ldyZ1aWQ9YWFhYSZwdz1iYmJiYiZpc19hdXR0b3I9VHJ1ZSBIVFRQLzEuMQ0KSG9zd
DogZ29vZ2xlLWdydX1lcmUuYXBwc3BvdC5jb20NC1VwZ3JhZGUtSW5zZWw1cmUtUmVxdWV
zdHM6IDENC1VzZXItQWdlbnQ6IE1vemlsbGEvNS4wIChXaW5kb3dzIE5UIDEwLjA7IFdpb
jY0OyB4NjQpIEFwcGxlV2ViS2l0LzUzNy4zNiAoS0hUTUwsIGxpa2UgR2Vja28pIENocm9
tZS83NC4wLjM3MjkuMTU3IFNhZmFyaS81MzcuMzYNckFjY2VwdDogdGV4dC9odG1sLGFwc
GxpY2F0aW9uL3hodG1sK3htbCxxhchBSaWNhdGlvbi94bWw7cT0wLjksaW1hZ2Uvd2VicC
xpbWFnZS9hcG5nLCovKjtxPTAuOCxhcHBsaWNhdGlvbi9zaWduZWQtZXhjaGFuZ2U7dj1iM
w0KUmVmZXJlcjogaHR0cDovL2dvb2dsZS1ncnV5ZXJlLmFwcHNwb3QuY29tLzkyMjMyNDg
0NDAYNS9uZXdhY2NvdW50Lmd0bA0KQWwNjZXB0LUVuY29kaW5nOjBnem1wLzCBkZWZsYXR1D
QpBY2NlcHQtTGfUz3VhZ2U6IGVuLVVTLGVuO3E9MC45DQpDb25uZWw0aW9uOjBjbG9zZQ0
KDQo=]]></request>
    <response
base64="true"><![CDATA[ SFRUUC8xLjEgMjAwIE9LDQpDYWNoZS1Db250cm9sOjBuby1
jYWN0ZQ0KQ29udGVudC10eXB10iB0ZXh0L2h0bWwNClByYWdtYToGbm8tY2FjaGUNClNld
C1Db29raWU6IEEdSVVlFUKU90DQ3Nzc1MzB8YWFhYXx8YXV0aG9yOyBwYXR0PS85MjIzMjQ

```

4NDQwMjUNC1gtWFNTLVByb3R1Y3Rpb246IDANClgtQ2xvdWQtVHJhY2UtQ29udGV4dDogY  
2YwYwVmNDQyNzIwNGRjZjJhMGE5OTEyOTE0YTIyMWQNC1Zhcnc6IEFjY2VwdC1FbmNvZG1  
uZw0KRGF0ZTogV2VklCAyOSBNYXkgMjAxOSAxMzozNjowMiBHTVQNC1NlcnZlczjogR29vZ  
2x1IEZyb250ZW5kDQpDb250ZW50LUXlbnR0aDogMjE0Mw0KRXhwaXJlczogV2VklCAyOSB  
NYXkgMjAxOSAxMzozNjowMiBHTVQNCkNvbW51Y3Rpb246IGNsb3N1DQoNCjwhRE9DVF1QR  
SBIVE1MIFBVQkxJQyAiLS8vVzNDLy9EVEQgSFRNTCA0LjAxIFRyYW5zaXRpb25hbC8vRU4  
iPgo8IS0tIENvcHlyaWdodCAyMDE3IEdvb2dsZSBjbmuIC0tPgo8aHRtbD4KPghlYWQ+C  
jx0aXR5ZT5HcnV5ZXJlOiBFcnJvcjwvdG10bGU+CjxzdhlsZT4KLyogQ29weXJpZ2h0IDI  
wMTcgR29vZ2x1IEluYy4gKi8KcmJvZHksIGh0bWwsIHRkLCBzcGFuLCBkaXYsIGlucHV0L  
CB0ZXh0YXJlYSB7CiAgZm9udC1mYW1pbHk6IHNhbnMtc2VyaWY7CiAgZm9udC1zaXplOiA  
xNHB0Owp9Cgpib2R5IHsKICBiYWNRZ3JvdW5kOiB1cmwoJ2NoZWVzZS5wbmcnKSB0b3AgY  
2VudGVyIHJlcGVhdDsKICB0ZXh0LWFsaWduOiBjZW50ZXI7CiAgb3BhY210eTogMC44MDs  
KfQoKaDIgewogIHRleHQtYwXpZ246IGNlbnRlcjsKICBmb250LXNpemU6IDMwcmw7CiAgZ  
m9udC13ZWlnaHQ6IGJvbGQ7Cn0KCnRkIHsKICB2ZXJ0aWNhbC1hbGlnbjogdG9wOwogIHB  
hZGRpbmc6IDVweDsKfQoKYSwgYTob3ZlciB7CiAgdGV4dC1kZWVucmF0aW9uOiB1bmRlc  
mxpbmU7CiAgY29sb3I6ICMwMDAwYmI7Cn0KCmE6dmlzaXRlZCB7CiAgY29sb3I6ICNiYjA  
wMDA7Cn0KCmEuYnV0dG9uOnZpc2l0ZWQgewogIGNvbG9yOiAjMDAwMGJiOwp9CgouY29ud  
GVudCB7CiAgdGV4dC1hbGlnbjogbGVmdDsKICBtYXJnaW4tbGVmdDogYXV0bzskICBtYXJ  
naW4tcm1naHQ6IGF1dG87CiAgd2lkdGg6IDkwJTskICBiYWNRZ3JvdW5kOiAjZmZmZmNjO  
wogIHBhZGRpbmc6IDIwcmw7CiAgYm9yZGVyOiAzchggc29saWQgI2ZmYjE0TskfQoKLn1  
lbnUgewogIHRleHQtYwXpZ246IGxlZnQ7CiAgcGFkZGluZz0gMTBweCAyMHB4IDM1cmw7  
jBweDsKICBtYXJnaW4tbGVmdDogYXV0bzskICBtYXJnaW4tcm1naHQ6IGF1dG87CiAgbW  
yZ21uLXRvcDogMjBweDsKICB3aWR0aDogOTAlowogIGJhY2tncm91bmQ6ICNmZmZmY2M7C  
iAgYm9yZGVyOiAzchggc29saWQgI2ZmYjE0TskfQoKLn1lbnUtdXNlcjB7CiAgY29sb3I  
6ICMwMDAwMDA7CiAgZm9udC13ZWlnaHQ6IGJvbGQ7Cn0KCmNtZW51LWxlZnQgewogIGZsb  
2F00iBsZWZ0Owp9CgojbWVudS1sZWZ0IGEsICNtZW51LWxlZnQgYTob3ZlciwgI21lbnU  
tbGVmdCBhOnZpc2l0ZWQgewogIGNvbG9yOiAjMDAwMDAwOwp9CgojbWVudS1yaWdodCB7C  
iAgZmxvYXQ6IHJpZ2h0Owp9CgojbWVudS1yaWdodCBhLCAjbWVudS1yaWdodCBhOmhvdM  
yLCAjbWVudS1yaWdodCBhOnZpc2l0ZWQgewogIGNvbG9yOiAjMDAwMDAwOwp9CgoubWVzc  
2FnZSB7CiAgd2lkdGg6IDUwJTskICBjb2xvcjogI2ZmMDAwMDsKICBiYWNRZ3JvdW5kOiA  
jZmZkZGRkOwogIGJvcmlcZjogMnB4IHNvbG1kICNmZjAwMDA7CiAgYm9yZGVyLXJhZG1c  
zogMwVtOwogIC1tb3otYm9yZGVyLXJhZG1cZogMwVtOwogIHBhZGRpbmc6IDEwcmw7CiA  
gZm9udC13ZWlnaHQ6IGJvbGQ7CiAgdGV4dC1hbGlnbjogY2VudGVyOwogIG1hcmdpbjogY  
XV0bzskICBtYXJnaW4tdG9wOiAyMHB4OwogIG1hcmdpbi1ib3R0b206IDIwcmw7Cn0KCm1  
ucHV0LCB0ZXh0YXJlYSB7CiAgYmFja2dyb3VuZC1jb2xvcjogI2ZmZmZmZjsKfQoKLnJlZ  
nJlc2ggewogIGZsb2F00iBjZW50ZXI7CiAgd2lkdGg6IDkwJTskICB0ZXh0LWFsaWduOiB  
yaWdodDsKICBtYXJnaW46IGF1dG87CiAgcGFkZGluZy10b3A6IDA7CiAgcGFkZGluZy1ib  
3R0b206IDJwdDsKICBtYXJnaW4tdG9wOiAwOwogIG1hcmdpbi1ib3R0b206IDA7Cn0KCm5  
oMi13aXR0LXJlZnJlc2ggewogIG1hcmdpbi1ib3R0b206IDA7Cn0KCjwvc3R5bGU+Cgo8L  
2h1YWQ+Cgo8Ym9keT4KCjxkaXYgY2xhc3M9J21lbnUnPgogIDxzcgFuIGlkpSdtZW51LWx  
lZnQnPgogICAgPGEgaHJlZj0nLzkyMjMyNDg0NDAYNS8nPkxvbnV0L2E+CjAgICAgIAogI  
Dwvc3Bhbj4KICA8c3BhbiBpZD0nbWVudS1yaWdodCc+CjAgICAgIAogICAgICAgICAgICAg  
gPGEgaHJlZj0nLzkyMjMyNDg0NDAYNS8s2dpbic+U21nbiBpbjwvYT4KICAgICAgfCA8Y  
SBocmVmpScvOTIyMzI0DQ0MDI1L251d2FjY291bnQuZ3RsJz5TaWduIHVwPC9hPgogICA

```

gICAKICA8L3NwYW4+CjwvZGl2PgoKCgo8ZG12IGNsYXNzPSdtZXNzYWdlJz5BY2NvdW50I
GNyZWZ0ZWQuPC9kaXY+CgoKPC9ib2R5PgoKPC9odG1sPgo= ] ]></response>
  <responseRedirected>>false</responseRedirected>
</requestresponse>
</issue>
</issues>
</burpXml>
</data>
</ServiceRequest>

```

## XML response

```

<?xml version="1.0" encoding="UTF-8"?>
<ServiceResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="https://qualysapi.qualys.com/qps/xsd/3.
0/was/burp.xsd">
  <responseCode>SUCCESS</responseCode>
  <count>1</count>
  <data>
    <Burp>
      <id>145201</id>
      <webApp>
        <id>1524084</id>
        <name>
          <![CDATA[demoap15webapp]]>
        </name>
        <url>
          <![CDATA[http://10.11.72.37]]>
        </url>
      </webApp>
      <issuesCount>3</issuesCount>
      <issues burpVersion="2.0.20beta" exportTime="Wed May 29
13:45:42 UTC 2019">
        <issue>
          <id>174201</id>
          <serialNumber>5018346890832155648</serialNumber>
        </issue>
        <issue>
          <id>174202</id>
          <serialNumber>5761124851012705280</serialNumber>
        </issue>
        <issue>
          <id>174203</id>
          <serialNumber>7919395047422736384</serialNumber>
        </issue>

```

```
</issues>
<fileName>testBurpReportImport</fileName>
<errorRecords>
  <count>0</count>
</errorRecords>
</Burp>
</data>
</ServiceResponse>
```

## XSD

[platform API server](https://platform-api-server.com/qps/xsd/3.0/was/burp.xsd)/qps/xsd/3.0/was/burp.xsd

# Error Messages

## Sample Messages: Elements

Sample messages for element errors are shown below

Error Message	Resolution
Element Validation	
url: Invalid URL format (<value>).	URL format must be as follows:  http://<baseUrl>/rest/3.0/?parameters
<scope>: Invalid value (<value>).	Element must be set to one of these values: ALL, LIMIT, SUBDOMAIN or DOMAINS.
domains: Element is required when scope is set to: DOMAINS.	Specify the domains to include in the web application scope in the “domains” element.
subDomain: Element is required when scope is set to: SUBDOMAIN.	Specify the subdomains to include in the web application scope in the “subDomain” element.
subDomain: Invalid domain name format (<value>).	Use following format in the “subDomain” element: .my.domain.suffix (must start with a dot)
useRobots: Invalid value (<value>).	Element “userRobots” must be set to one of these values: IGNORE, ADD_PATHS, BLACKLIST.
Url: Element is required	Element “Url” is required.

uris.<field>: Invalid URL format (<value>).	For the uri.<field> sub element, specify a URL like http://domain.name/base/url/?parameters
uris.<field>: Length of the field must not be greater than 2048 characters. (<value>).	For the uri.<field> sub element, the maximum field length is 2048 characters.
Domain: Element is required	The domain element must be provided.
Domain: Invalid host name format (<value>).	Use following format for value in the “Domain” element: www.my.domain.example.
Length of all domains cannot exceed 2048 characters.	The list of all domains in the web application cannot exceed 2048 characters.
Attribute.category: Element is required.	The element Attribute.category is required.
Attribute.category: Invalid value (<value>).	Element Attribute.category must be set to one of these values: Business Function, Business Location, Business Description.
Attribute.value: Element is required.	Provide a value for the attribute in the Attribute.value element: function, location or description.
The attribute length cannot be greater than 64 characters.	The value for this attribute cannot exceed 64 characters.

The attribute length cannot be greater than 2048 characters.

The value for this attribute cannot exceed 2048 characters.

<element>:  
Element must not be set.

This element does not apply to this request.

set: Element must contain at least one child.

The set element requires at least one sub element.

At least one of the following elements must be set: set, add, remove.

This request requires at least one of these elements: set, add or remove.

headers: Length of all headers cannot exceed 2048 characters.

The values of all headers cannot exceed 2048 characters.

At least one of the following elements must be set: set, add, remove.

For an “update” request you must set at least one of these elements: set, add or remove.

UrlEntry: Element is required.

The element UrlEntry must be provided.

UrlEntry: Invalid URL format (value).

Specify a URL like  
`http://domain.name/base/url/?parameters`

<parent>: Length of all [URLs, regular expressions] cannot exceed 2048 characters

The list of entries for a given type shall not exceed 2048 characters.

UrlEntry: Only regular expressions are accepted for this element.

You must provide regular expressions for the element postDataBlackList.

tags.<element>: Element must not be set.

The tags element does not apply for this request

tags.set: Element must contain at least one child.

At least one sub element must be provided for the element tag.set.

Tag.id: Element is required.

Provide a value for the element Tag.id

Tag.id: Invalid value (value).

Value must be an integer set at least to 1.

Tag: Tag specified by ID <id> does not exist or is not available.

Provide a value for the element id that corresponds to a valid tag.

## Sample Messages: Authorization

Sample messages for errors related to authorization are shown below.

Error Message	Resolution
Element Validation	
You are not authorized to access the application through the API.	You must be granted the API Access permission in your roles and scopes.
You do not have access to module Web Application Scanning required by this API.	Please contact your account manager to have WAS enabled in your subscription.
No data shall be passed for this operation.	The POST request does not specify a data element.
User is not authorized to perform this operation on specified object(s).	You must be granted access to these objects in your user scope.
Operation %s does not support search filters.	Do not provide search filters for this operation
Quota of web application has been exceeded.	Please check with your account manager to purchase new applications.

## Sample Messages: Criteria

Sample messages for errors related to criteria are shown below.

Error Message	Resolution
Element Validation	
Criteria: Field is required.	Specify the name of the criteria to search against.
Criteria: Invalid criteria (<field name>).	Please search against one of the following criteria: %s.
Criteria: Invalid operator for criteria '<field>' (<operator>).	Allowed operations for this criteria are: %s.
Criteria: Value is required for criteria '<field>'.	Specify a value for a field name for search criteria.
Criteria: Invalid value format for criteria '<field>': <value>.	Boolean (true, false). Date and Time in UTC format Enumeration (allowed options separated by comma). Other: Specify criteria value(s) as <type>.

## Sample Messages: Report Storage Limit

Sample messages for errors related to report storage limit are shown below.

Error Message	Resolution
Element Validation	

Your  
[subscription|user]  
storage limit of  
<NB> Mb has been  
reached.

Delete existing reports and try again.

# Available operators

Operators supported by input parameters:

Integer - EQUALS, NOT EQUALS, GREATER, LESSER, IN

Text - CONTAINS, EQUALS, NOT EQUALS

Date - EQUALS, NOT EQUALS, GREATER, LESSER

Keyword - EQUALS, NOT EQUALS, IN

Boolean (true/false) - EQUALS, NOT EQUALS